

### T-1 (3mm) SOLID STATE LAMP

PRELIMINARY SPEC

Part Number: WP908A8YD

Yellow


#### **Features**

- •Low power consumption.
- ●Popular T-1 diameter package.
- General purpose leads.
- •Reliable and rugged.
- ●Long life-solid state reliability.
- •Available on tape and reel.
- ●RoHS compliant.

#### Description

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

#### **Package Dimensions**

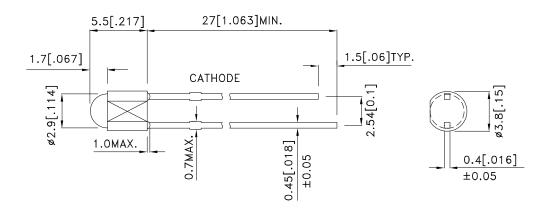

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
- Lead spacing is measured where the leads emerge from the package.
   Specifications are subject to change without notice.





SPEC NO: DSAJ0586 **REV NO: V.1** DATE: JAN/07/2009 PAGE: 1 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.F.Lu ERP: 1101022850

# Kingbright

#### **Selection Guide**

Part No.	Dice	Dice Lens Type		d) [2] DmA	Viewing Angle [1]
			Min.	Тур.	201/2
WP908A8YD	Yellow (GaAsP/GaP)	YELLOW DIFFUSED	5	20	80°

#### Notes:

- 1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value. 2. Luminous intensity/ luminous Flux: +/-15%.

### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Yellow	590		nm	IF=20mA
λD [1]	Dominant Wavelength	Yellow	588		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Yellow	35		nm	IF=20mA
С	Capacitance	Yellow	20		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Yellow	2.1	2.5	V	IF=20mA
lr	Reverse Current	Yellow		10	uA	VR = 5V

- 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.


### Absolute Maximum Ratings at TA=25°C

Parameter	Yellow	Units		
Power dissipation	75	mW		
DC Forward Current	30	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			


- Notes: 1. 1/10 Duty Cycle, 0.1ms Pulse Width. 2. 2mm below package base. 3. 5mm below package base.


SPEC NO: DSAJ0586 **REV NO: V.1** DATE: JAN/07/2009 PAGE: 2 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.F.Lu ERP: 1101022850


## **Kingbright**

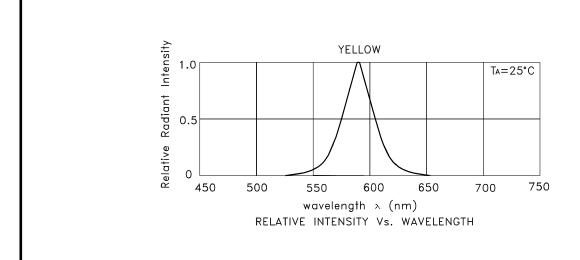



Yellow WP908A8YD












SPATIAL DISTRIBUTION

 SPEC NO: DSAJ0586
 REV NO: V.1
 DATE: JAN/07/2009
 PAGE: 3 OF 4

 APPROVED: WYNEC
 CHECKED: Allen Liu
 DRAWN: Y.F.Lu
 ERP: 1101022850

## **Kingbright**

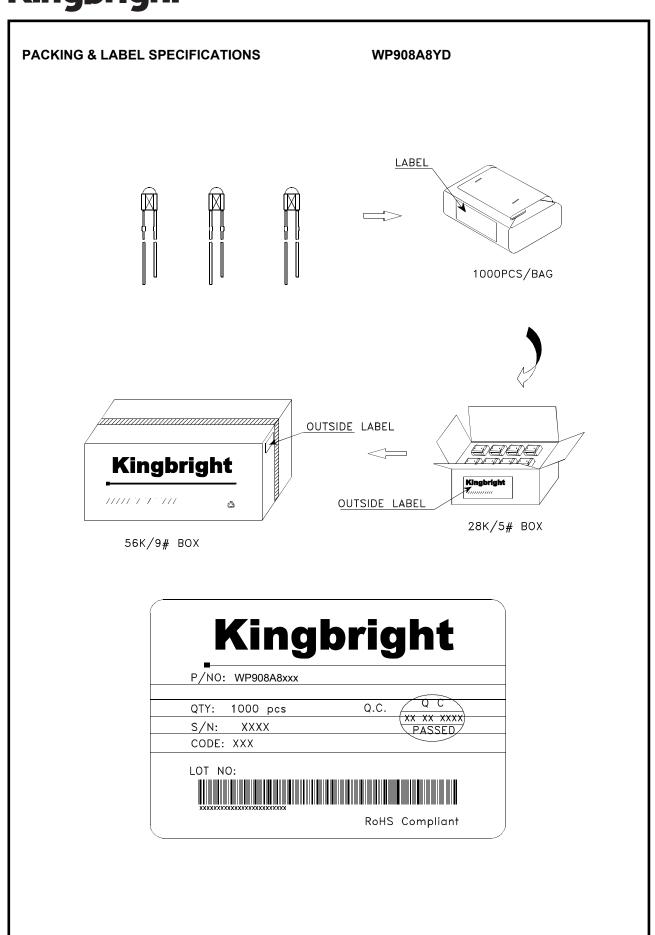

SPEC NO: DSAJ0586 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: JAN/07/2009 DRAWN: Y.F.Lu PAGE: 4 OF 4 ERP: 1101022850

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kingbright: WP908A8YD