

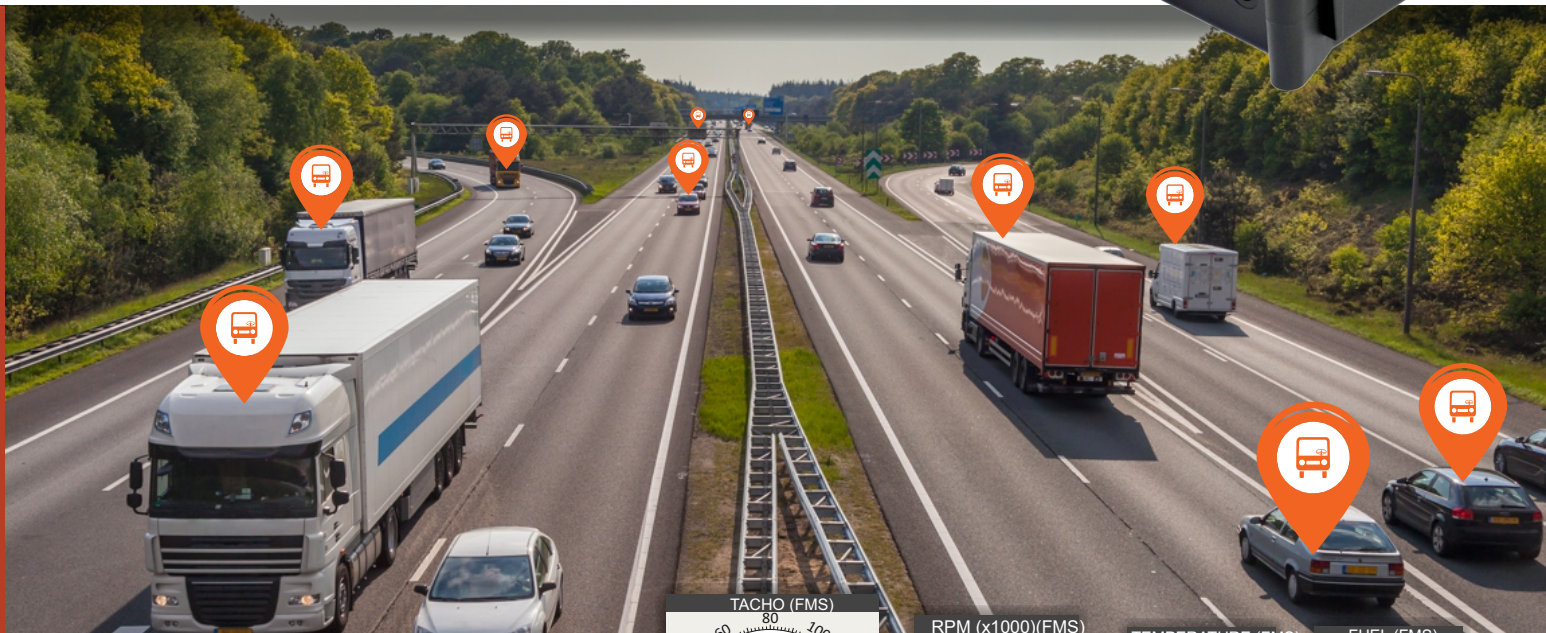



Lantronix (formerly FALCOM), a storied M2M and IoT specialist from Germany, designs, manufactures and sells world-wide state-of-the-art devices, services and solutions ideally suited to numerous applications: fleet management, car sharing, usage-based insurance, asset and workforce tracking and security, precision farming.





FOX3-2G/3G/4G



ADVANCED VEHICLE TELEMATICS AND DATA LOGGING SYSTEM WITH HIGH SPEED DATA CONNECTION

FOX3-2G/3G/4G Series is a compact all-in-one device combining **2G/3G/4G data connection** with the latest **GNSS technology** to completely satisfy customer's need. It is a highly **customizable vehicle telematics device** and it offers a variety of inputs and outputs to satisfy the most demanding requirements. A box (**IOBOX-MINI**, **IOBOX-CAN** or **IOBOX-WLAN**) can be used to extend the functionality of the FOX3-2G/3G/4G Series for the most flexible expansion options in the industry. FOX3-2G/3G/4G Series is designed to operate with

internal or external antennas. Built-in internal antennas are automatically turned off while external antennas are in use. This device will dramatically simplify your logistics as well as the installation process and the post-installation support. Newly developed LANTRONIX "**Premium-Features**" show the way to the future of mobile data logging, storing, processing and sending. FOX3-2G/3G/4G Series is an advanced and fully customizable vehicle tracking device. FOX3-2G/3G/4G Series offers new features like: Data Encryption, several History Modes, Eco-



General

4G / 3G / 2G bands: (refer to the table below)

Internet (TCP/UDP/HTTP/SMTP)

Multi channel GNSS

(GPS/Galileo/GLONASS/BeiDou)

A-GPS (online / offline / autonomous)

Protocols: NMEA, FALCOM (binary)

Accuracy: **GPS** **GLONASS**

Position: 2.5 m 4.0 m

Acquisition / Sensitivity:

Cold Start: 29 s 30 s

Tracking: -161 dBm -158 dBm

Sensitivity: -148 dBm -145 dBm

GPS Operational limits:

Velocity: 500 m/s (972 knots)

Altitude: 50.000 m

Update rate: 1 Hz

GSM / GNSS Antennas

Internal and external ²⁾ with automatic/manual

Electrical characteristics

Power supply: +10,8 V to +32,0 V DC

Internal 1000 mAh rechargeable battery¹⁾

Average Power Consumption

Normal operation: 50mA @ 12 VDC

Sleep mode: < 1mA @ 12 VDC

Environmental data

Operating temp.: -40 °C to +85 °C

Storage temp.: -40 °C to +85 °C

GSM³⁾: -40 °C to +85 °CBattery⁴⁾ Discharging temp.: -20 °C to +60 °C

Charging temp.: 0 °C to +45 °C

Physical characteristics

Dimensions (LxWxH): 105 mm x 83 mm x 28

Interfaces

3 x Digital/analog IO ports (user-configurable)

1 x Predefined digital input (Ignition)

3 x LED indicators (user-configurable)

2 x RS-232 Ports (1xV.24 level; 1xRS-232/RS-485²⁾³⁾)1 x 10pin Mini-USB connector (for IOBOX-MINI¹⁾, IOBOX-CAN¹⁾ or IOBOX-WLAN¹⁾)

1 x 1-Wire interface (incl. 5V Phantom Power)

1 x I²C interface1 x 4pin audio jack interface (2.5mm)⁶⁾1 x CAN-Bus Interface²⁾⁵⁾ (uses 2 of 3 I/Os)

1 x Inside SIM card holder for 1,8/3 V SIM cards

1 x USB 2.0 interface

Sensor / Measurement range

3-axis Acceleration/Temperature

- **3DG**: ± 8g (programmable)- **Temperature**: - 50 to + 120 °C (programmable)

Processor core

RTC⁷⁾

8 MB Flash(History / Firmware / Configuration)

1) Optional / Accessory

2) Activation with PFAL-Command.

3) The GSM/GPRS module is fully functional (-20 °C to + 55 °C meets the 3GPP specifications) Storage and using conditions of the device with battery option are limited to the battery temperature range.

4) Applicable with backup battery

5) Hardware Premium Features: CAN-interface

6) Available on FOX3-3G-AU and FOX3-2G only

- ☐ 3000 programmable Geofences
- ☐ 2000 programmable Waypoints
- ☐ 250 programmable Alarms
- ☐ ECO-Drive-GPS functions
- ☐ Customizable firmware configuration


- ☐ Passive/active RFID based applications
- ☐ NFC based applications
- ☐ Internal GSM/GNSS antennas & connectors for optional external antennas¹⁾
- ☐ Hardware expandable via IOBOX-MINI¹⁾, IOBOX-CAN¹⁾ or IOBOX-WLAN¹⁾

- ☐ PROMOTION KIT providing all necessary hardware, software, documentation, SIM Card and 3 month access to the D2Sphere tracking platform including 8h technical training support
- ☐ D2SPHERE™ device management services to monitor, diagnose, control and update your FALCOM devices

- Real time online tracking
- Fleet management / monitoring
- Car sharing
- Waste management
- Theft protection

- Public transportation
- Real time satellite navigation
- Territory management
- Route verification
- Trip management / distance calculations

- Driving behaviour / Eco-Drive monitoring
- Security / Emergency / Insurance services (UBI)
- Toll collection / Pay-As-You-Drive (PAYD)
- Compatible with D2SPHERE™ tracking platform and easily adaptable to other tracking servers.

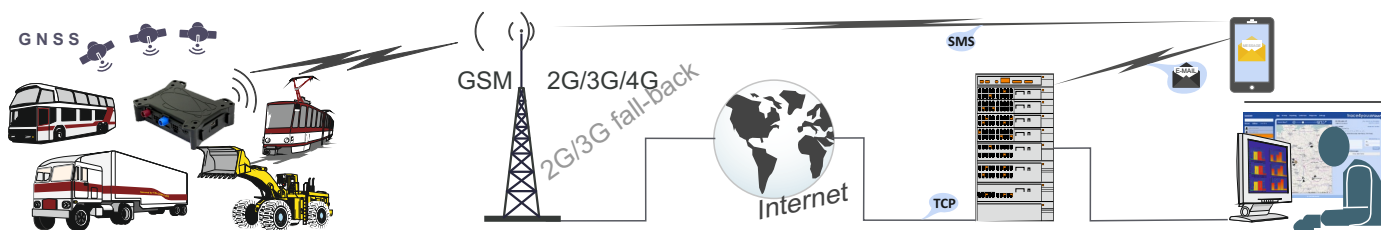

FOX3-2G/3G/4G APPLICATION AREA

COMMUNICATION NETWORK

WEB SERVER

USER-INTERFACE (e.g. D2SPHERE™)

PRODUCT	4G ^{a)} BAND	3G ^{b)}	2G	CERTIFICATIO	FEATURES	REGIONS
FOX3-2G	-	-	Quad	CE, E1	Standard (with	World
FOX3-3G Std.	-	1/2/5/8/19	Quad	E-Mark, (CE,ISED,FCC,B T) ^{d)}	Standard (no audio)	World
FOX3-3G-BLE	-	1/2/5/8/19	Quad		Bluetooth Low	World
FOX3-3G-AU	-	1/2/5/8/19	Quad		Audio (Spk. +	World
FOX3-3G-DR	-	1/2/5/8/19	Quad		Dead-Reckoning	World
FOX3-3G-BID	-	1/2/5/8/19	Quad		BlueID Technology	World
FOX3-4G-C4-	Cat 4: 2/4/5/7/17	1/2/4/8/5 ^{c)}	Quad	CE,E1,ISED,FCC	Standard (no audio)	4G North America, 3G/2G World
FOX3-4G-C4-	Cat 4: 1/3/5/7/8/20	1/2/4/8/5 ^{c)}	Quad	(CE,E-Mark) ^{d)}	Standard (no audio)	4G Europa, 3G/2G World
FOX3-4G-C1-	Cat 1: 3/7/20	-	900/1800	CE,E-Mark	Standard (no audio)	4G Europa, 2G Dual-band
FOX3-4G-M1	M1/NB1: 2/3/4/5/8/12/13/20/26*/28*	-	Quad	(CE,E-Mark) ^{d)}	Standard (no audio)	North America (M1), Multiregion (M1/NB, 2G)

a) Cat 4 : 150 Mb/s DL, 50 Mb/s UL; Cat 1:10 Mb/s DL, 5 Mb/s UL; Cat M1: 300 kbit/s DL, 375 kbit/s UL; Cat NB1: 27.2 kbit/s DL, 62.5 kbit/s UL

b) 5.76 Mb/s UL, 7.2 Mb/s DL

c) 42 Mb/s DL, 5.76 Mb/s UL

d) Planned / In progress * =Roaming bands ** Please consult us this model, which is subject to MOQ and other considerations

LANTRONIX, INC. | 7535 Irvine Center Drive - Suite 100 | Irvine, CA 92618, United States of America | Tel: (800) 526-8766
 | Tel: +1 (949) 453-3990 | Fax: +1 (949) 453-3995 | sales@lantronix.com

© 2019 Lantronix, Inc. All rights reserved. Lantronix is a registered trademark of Lantronix, Inc. in the U.S. and other countries. FOX3 is a trademark of Lantronix, Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice MPB-00065, Rev B.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lantronix:

[F31HLTFB11](#) [F35H02FS](#) [F35H88FS](#)