

Commercial CCR-33 Miniature DC-18GHz SPDT Switch

Failsafe

The CCR-33 Switch is a broadband, SPDT, electromechanical, coaxial switch designed to switch a microwave signal from a common input to either of two outputs. The characteristic impedance is 50 Ohms. The switches are small with connector spacing compatible with SMA connectors.

The CCR-33 series switch is offered with either a failsafe or latching actuator. This design is compatible with the two most common mounting hole patterns. The CCR-33 series switch is interchangeable with a variety of switches.

Specifications

RF Contacts: Break before make

Voltage (VDC) 20°C Actuator

Current (mA) 200 160

12 15 28

Switching Time: 20 msec max Connectors: SMA (f) 1.65 oz. max Weight:


Temperature Range: -40°C to +65°C (Operating)

MIL-STD-202 Method 213, Condition D (500G Non Operating) Shock: Vibration: MIL-STD-202 Method 214, Condition D (10G RMS Non Operating)


Humidity: Moisture Seal Available

MTBF: 7.3 Million Hours (MIL-HDBK-217F Fixed, 25°C, <1 Cycle per hour)

RF Power Handling

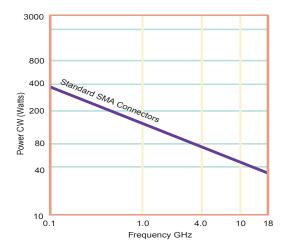

Specifications	DC-6 GHz	6-12 GHz	12-18 GHz
VSWR (max)	1.25:1	1.40:1	1.50:1
Insertion Loss (min)	0.20 dB	0.40 dB	0.50 dB
Isolation (max)	70.0 dB	60.0 dB	60.0 dB

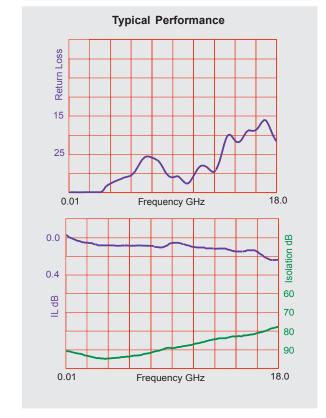






Specifications subject to change without notice.


www.teledynecoax.com email: coax@teledyne.com


Commercial CCR-33 Miniature DC-18GHz SPDT Switch Failsafe

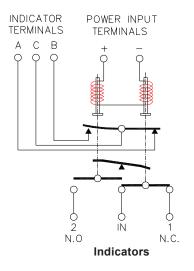

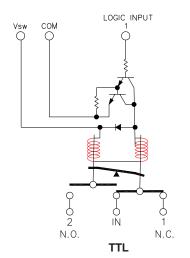




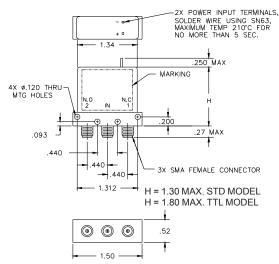

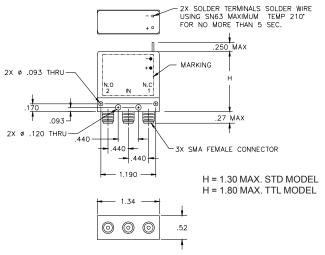

Standard Width Body Optional Narrow Width Body

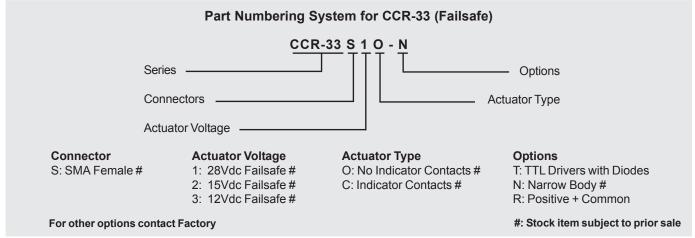



Specifications subject to change without notice.

www.teledynecoax.com email: coax@teledyne.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Teledyne Relays: CCRT-33S20-T