



FLIR ONE® Pro-Series

PROFESSIONAL-LEVEL THERMAL IMAGING
FOR YOUR SMARTPHONE



Choose the FLIR ONE Pro LT for:

- Competitive pricing, **starting at just \$299**
- Thermal image resolution of 4,800 pixels
- Temperature measurements up to 120°C (248°F)
- The thermal sensitivity needed to detect temperature differences down to 100 mK
- VividIR™ thermal resolution enhancement for improved sensitivity and image quality
- FLIR MSX® technology, which combines thermal and visual data for finer details and added perspective
- The FLIR OneFit™ connector extends up to 4 mm to attach the FLIR ONE to your smartphone through many popular phone cases



Choose the FLIR ONE Pro for:


- The highest thermal image resolution at **19,200 pixels**—a 4x improvement over the Pro LT
- Maximum temperature measurements that are **3x higher** than the Pro LT—up to 400°C (752°F)
- The thermal sensitivity needed to detect temperature **differences down to 70 mK**
- VividIR™ thermal resolution enhancement for improved sensitivity and image quality
- FLIR MSX® technology, which combines thermal and visual data for finer details and added perspective
- The FLIR OneFit™ connector extends up to 4 mm to attach the FLIR ONE to your smartphone through many popular phone cases



Identify electrical faults



Find signs of air leaks
and poor insulation

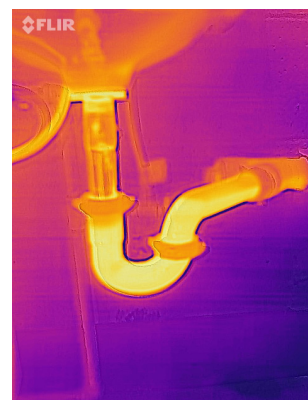



Check for water leaks

The FLIR ONE® Pro-Series

PROFESSIONAL-LEVEL THERMAL IMAGING FOR YOUR SMARTPHONE

SEE THE DIFFERENCE!

The higher resolution of the FLIR ONE Pro produces sharper edges and better image quality than the FLIR ONE Pro LT

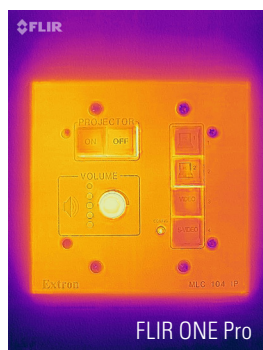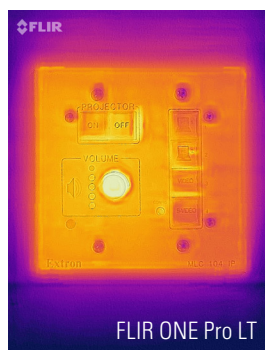

SPECIFICATIONS

Specifications by product	FLIR ONE Pro LT	FLIR ONE Pro
Thermal pixel size	17 μ m	12 μ m
Thermal resolution	4,800 pixels (80 \times 60)	19,200 pixels (160 \times 120)
Thermal sensitivity	100 mK	70 mK
Object temperature range	-20°C to 120°C (-4°F to 248°F)	-20°C to 400°C (-4°F to 752°F)
Common features		
Measurement Accuracy	$\pm 3^{\circ}\text{C}$ (5.4°F) or $\pm 5\%$, typical percent of the difference between ambient and scene temperature. Applicable 60 sec after start-up when the unit is within 15°C to 35°C (59°F to 95°F) and the scene is within 5°C to 120°C (41°F to 248°F)	
Operating temperature	0°C to 35°C (32°F to 95°F), battery charging 0°C to 30°C (32°F to 86°F)	
Non-operating temperature	-20°C to 60°C (-4°F to 140°F)	
Size (w \times h \times d)	68 \times 34 \times 14 mm (2.7 \times 1.3 \times 0.6 in)	
Weight (incl. battery)	36.5 g	
Visual resolution	1440 \times 1080	
HFOV / VFOV	50° $\pm 1^{\circ}$ / 43° $\pm 1^{\circ}$	
Adjustable MSX distance	0.3 m – Infinity	
Image presentation modes	Infrared, visual, MSX, gallery	
VividIR	Yes	
Palettes	Gray (white hot), Hottest, Coldest, Iron, Rainbow, Rainbow HC, Arctic, Lava, and Wheel	
Capture modes	Video, photo, time-lapse	
Video and still image display/capture	Saved as 1440 \times 1080	
File formats	Radiometric JPG, MPEG-4 (file format MOV (iOS), MP4 (Android))	
Spot meter	On/off; Resolution 0.1°C (0.1°F)	
Mechanical shock	Drop from 1.8 m (5.9 ft)	

Specifications are subject to change without notice. For the most up-to-date specs, go to www.flir.com/flironepro

CORPORATE HEADQUARTERS

FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
PH: +1 877.773.3547

NASHUA

FLIR Systems, Inc.
9 Townsend West
Nashua, NH 03063
USA
PH: +1 866.477.3687

LATIN AMERICA

FLIR Systems Brasil
Av. Antonio Bardella, 320
Sorocaba, SP 18085-852
Brasil
PH: +55 15 3238 7080

CANADA

FLIR Systems, Ltd.
920 Sheldon Court
Burlington, ON L7L 5K6
Canada
PH: +1 800.613.0507

www.flir.com
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2018 FLIR Systems, Inc. All rights reserved. 06/18

18-1164-INS



The World's Sixth Sense®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Teledyne FLIR:

[FLIR ONE PRO LT-MICRO-USB](#) [FLIR ONE PRO LT-USB-C](#)