

## **RONDA-WAS2-B**

Asymmetric beam for wall-washing with holder B compatible with 3rd party connectors from BJB, IDEAL and Stucchi.

### **SPECIFICATION:**

Dimensions	Ø 69.9 mm
Height	14.5 mm
Fastening	socket
ROHS compliant	yes 🛈



#### **MATERIALS:**

Component	Туре	Material	Colour	Finish	Length
F15862_RONDA-WAS2	Single lens	PMMA	clear		49.9
F15586_RONDA-HLD-B	Holder	PC	white		69.9

### **ORDERING INFORMATION:**

Quantities for one set:Single lens1Holder1




# PRODUCT DATASHEET RONDA-WAS2-B

Component		Qty in box	MOQ	MPQ	Box weight (kg)
F15862_RONDA-WAS2 » Box size: 480 x 280 x 300 mm	Single lens	420	120	30	8.3
F15586_RONDA-HLD-B » Box size: 480 x 280 x 300 mm	Holder	420	120	30	4.4



## PRODUCT DATASHEET RONDA-WAS2-B

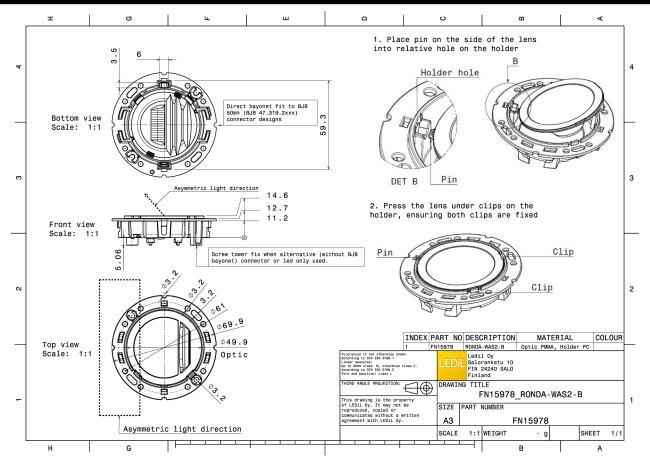

See also our general installation guide: <u>www.ledil.com/installation\_guide</u>



## **OPTICAL RESULTS (SIMULATED):**

LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour/type Required components:	V10 Gen7 Asymmetric 0 % 0.8 cd/lm 1 White	
IDEAL: 50-2002CT		Light distribution files
bridgelux.		
LED	VERO13	
FWHM / FWTM	Asymmetric	
Efficiency	0 %	
LEDs/each optic	1	
Light colour/type	White	
Required components:		
C13658_CLAMP-VE	RO13-18	
		Light distribution files
CITIZEN		89*
	CLL02x/CLU02x (LES10)	
LED	CLL02x/CLU02x (LES10) Asymmetric	89*
LED FWHM / FWTM		89*
LED FWHM / FWTM Efficiency	Asymmetric	89*
LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic	Asymmetric 0 % 0.8 cd/lm 1	89*
CITIZEN LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour/type Required components:	Asymmetric 0 % 0.8 cd/lm	89*



## **OPTICAL RESULTS (SIMULATED):**

#### LED LUXEON CoB 1204/1205 FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour/type White Required components: BJB: 47.319.2011 Light distribution files



#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

### Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

### Local sales and technical support www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Poznan, Poland Hong Kong, China

## Distribution Partners

www.ledil.com/ where\_to\_buy

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil:

FN15978\_RONDA-WAS2-B