

DAISY-2X2-W

~50° wide beam

TECHNICAL SPECIFICATIONS:

Dimensions

Fastening ROHS compliant

Height

21 mm pin, screw, clips yes ^①

79.5 mm

MATERIAL SPECIFICATIONS:

Component C16867_DAISY-2X2-W C16866_DAISY-2X2-SHD **Type** Multi-lens Shade



PRODUCT DATASHEET

DAISY-2X2-W

Material	Colour	Finish
PMMA	clear	
PC	black	gloss

ORDERING INFORMATION:

Quantities for one set:

Multi-lens 1 Shade 1




PRODUCT DATASHEET DAISY-2X2-W

Component		Qty in box	MOQ	MPQ	Box weight (kg)
C16867_DAISY-2X2-W » Box size: 400 x 300 x 300 mm	Multi-lens	440	440	20	5.7
C16866_DAISY-2X2-SHD » Box size: 400 x 300 x 300 mm	Shade	186	440	20	4.8





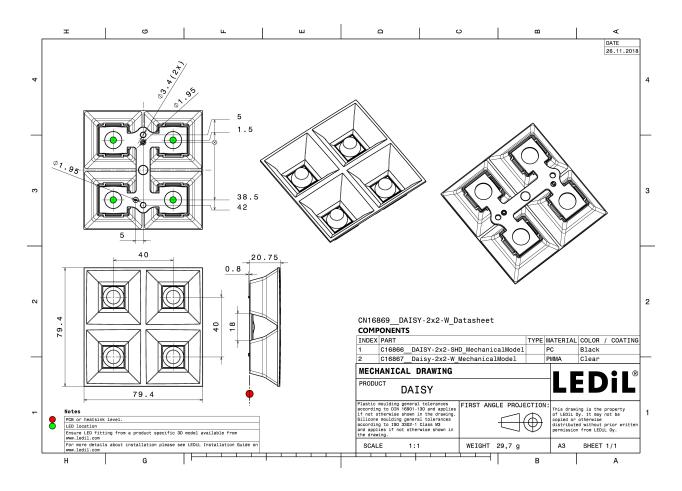





PHOTOMETRIC DATA (MEASURED):

ΜΝΙCΗΙΛ LED NF2W757G-MT (Tunable White) FWHM 53.0° 96 % Efficiency Peak intensity 1.3 cd/lm LEDs/each optic 1 Light colour **Tunable White** Required components: C16875_DAISY-2X2-SHD-WHT *Μ***NICHIA** LED NF2W757G-MT (Tunable White) FWHM 53.0° 91 % Efficiency Peak intensity 1.3 cd/lm LEDs/each optic 1 **Tunable White** Light colour Required components: C16866_DAISY-2X2-SHD SAMSUNG LED LM28xB Series FWHM 55.0° Efficiency 89 % Peak intensity 1.2 cd/lm LEDs/each optic 1 Light colour White Required components: C17483_DAISY-2X2-SHD-MATT **SAMSUNG** LED LM28xB Series FWHM 56.0° Efficiency 92 % 1.2 cd/lm Peak intensity LEDs/each optic 1 White Light colour Required components: C16875_DAISY-2X2-SHD-WHT

Last update: 10/04/2019Subject to change without prior noticePublished: 24/04/2019LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.4/7






PHOTOMETRIC DATA (MEASURED):

SAMSUNG

LED	LM28xB Series			
FWHM	55.0°			
Efficiency	90 %			
Peak intensity	1.2 cd/lm			
LEDs/each optic	1			
Light colour	White			
Required compor	ients:			
C16866_DAISY-2X2-SHD				









PHOTOMETRIC DATA (SIMULATED):

CREE ≑		90 ⁴
LED FWHM Efficiency LEDs/each optic Light colour Required componer C16866_DAISY-2		
MICHIΛ		
LED	NF2W757G-MT (Tunable White)	72
FWHM	56.0°	
Efficiency	91 %	ege (
Peak intensity	1.2 cd/lm	
LEDs/each optic	2	
Light colour	Tunable White	
Required componer C16866_DAISY-2		20 ⁴ 20 ⁷ 0 ⁴ 20 ⁷ X
Μ ΝΙCΗΙΛ		94 ⁴ 90
LED	NF2W757G-MT (Tunable White)	
FWHM	62.0°	
Efficiency	90 %	
Peak intensity	1 cd/lm	400
LEDs/each optic	4	
Light colour	Tunable White	9°
Required componer C16866_DAISY-2		



PRODUCT DATASHEET DAISY-2X2-W

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil: CN16869_DAISY-2X2-W