STRADA-2X2-5050-FR

Asymmetric spotlight beam for floodlighting railway tracks according to Russian normative. Variant optimized for flat 5050 size LED packages.

SPECIFICATION:

Dimensions 50.0 x 50.0 Height 11.8 mm Fastening pin, screw **ROHS** compliant yes 🕕



MATERIALS:

Component **Type** Material Colour **Finish** Length (mm) STRADA-2X2-5050-FR Multi-lens **PMMA** clear

ORDERING INFORMATION:

Box weight (kg) Component Qty in box MOQ MPQ

C17245 STRADA-2X2-5050-FR 800 160 160 12.1 » Box size: 480 x 280 x 300 mm

Published: 02/11/2020


OPTICAL RESULTS (MEASURED):

UMILEDS

LED LUXEON XR-5050 SQR (L213-xxxx016MRH001)

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files



LED RecLED 173x50mm 2900lm 740 2x6 5050 Opt G1

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files

PHILIPS

LED Fortimo FastFlex LED 2x8 DA (U)HE

FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files


Published: 02/11/2020

OPTICAL RESULTS (SIMULATED):



LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 4.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Protective plate, glass



Light distribution files

DESCRIPTION

LED LUXEON 5050 HE FWHM / FWTM Asymmetric Efficiency 86 %

Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

Light distribution files

Protective plate, glass

MUMILEDS

LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Protective plate, glass

OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric

Efficiency 86 %

Peak intensity 2 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:

Light distribution files


Protective plate, glass

LUMILEDS

LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files



LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files


Protective plate, glass

ELUMINUS

LED MP-5050-240E_810E

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files

OSRAM Opto Semiconductors

LED Duris S8
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



OPTICAL RESULTS (SIMULATED):



LED Duris S8
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White

Protective plate, glass


Required components:

Light distribution files

PHILIPS

LED Fortimo FastFlex LED 2x8 DA (U)HE

FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files




Protective plate, glass




LED SEOUL DC 5050 6V

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



OPTICAL RESULTS (SIMULATED):

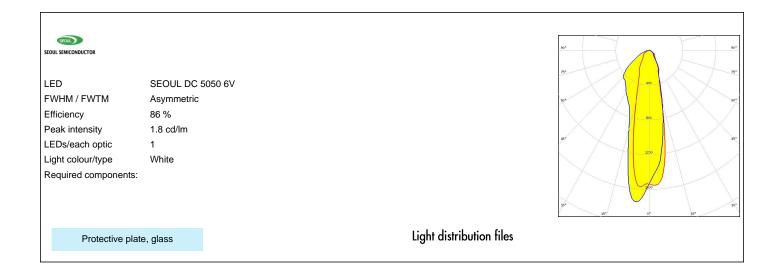



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 7 FI-24100 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil:

C17245_STRADA-2X2-5050-FR