

Data Sheet

LL04CR-BXJ45155L02

CREE 
 ▶ LED Solution Provider



Similar Products(Brightness Uniformity, Assymetry)



LL01ZZ-AGX45155L02

■ Features & Typical Applications

- High efficiency
- Optimized for uniform effect
- Roadway Lighting
- Anti-glare

■ Table of Contents


General Information & Product Nomenclature.....	P.2
Optical Specifications	P.3
Mechanical Specifications	P.4
Package Specifications	P.5

LL04CR-BXJ45155L02

General Information


- Lens Material : PC LEV1700
- Operating Temperature range -40°C~+110°C(upper limit +120°C).
- Storage Temperature range -40°C~+110°C(upper limit +120°C).
 - * Average transmittance in visible spectrum 400nm~700nm>90%.
- Usage and Maintenance:
 1. If necessary, clean lenses with mild soap, water and soft cloth.
 2. Never use any commercial cleaning solvents on lenses, like alcohol.
 3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Product Nomenclature

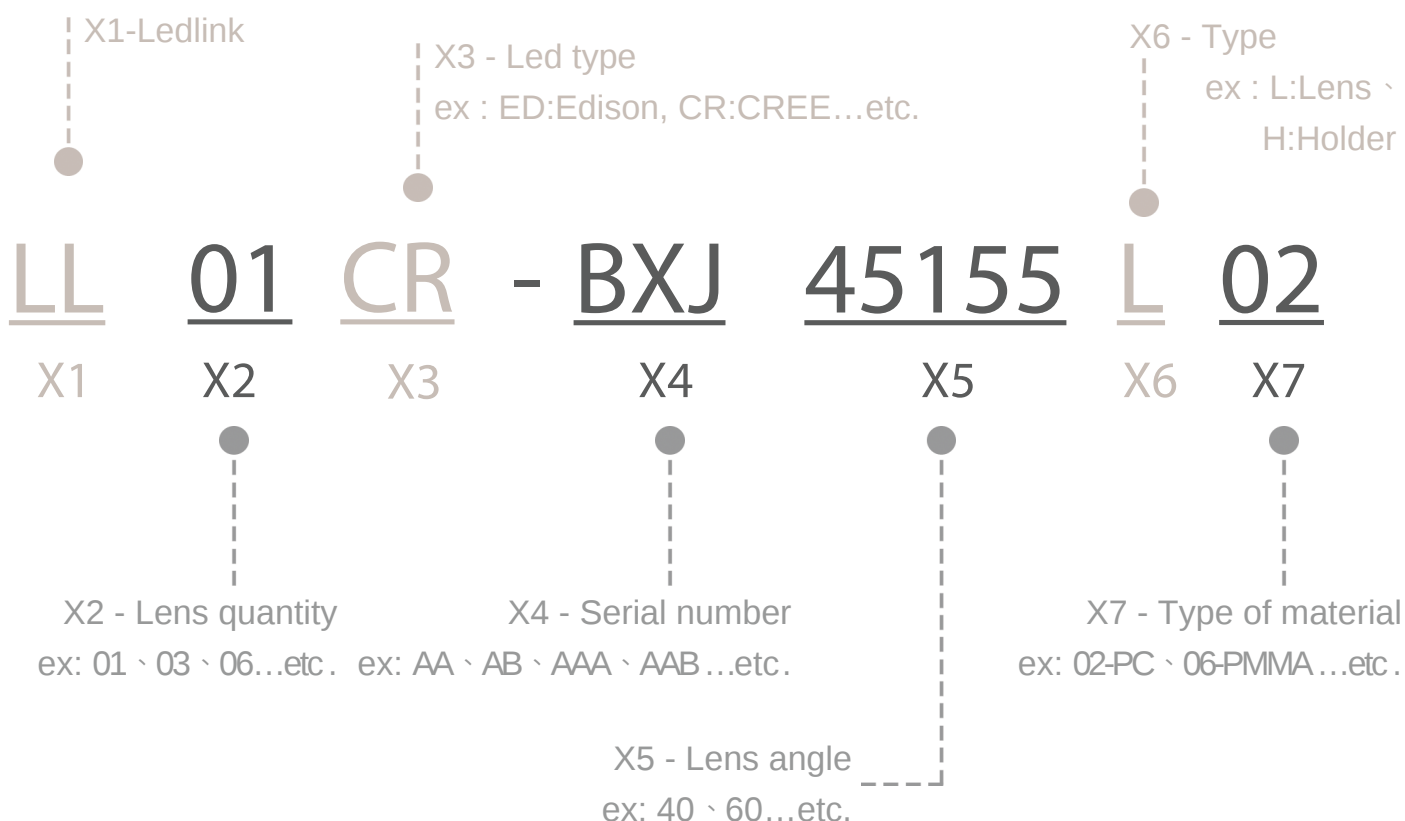

LL04CR-BXJ45155L02



Optical Specifications



Note: (1) All the results of analysis are based on 0 degrees of elevation.
 (2) Tolerance: $\pm 10\%$.
 (3) Led Luminous Flux(I_m): 508($\pm 5\%$).

IES File: [Download](#)


@elevation 0°

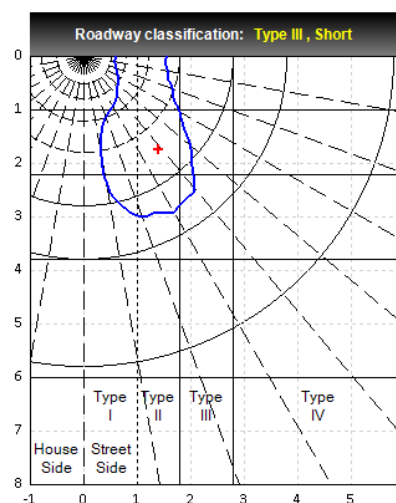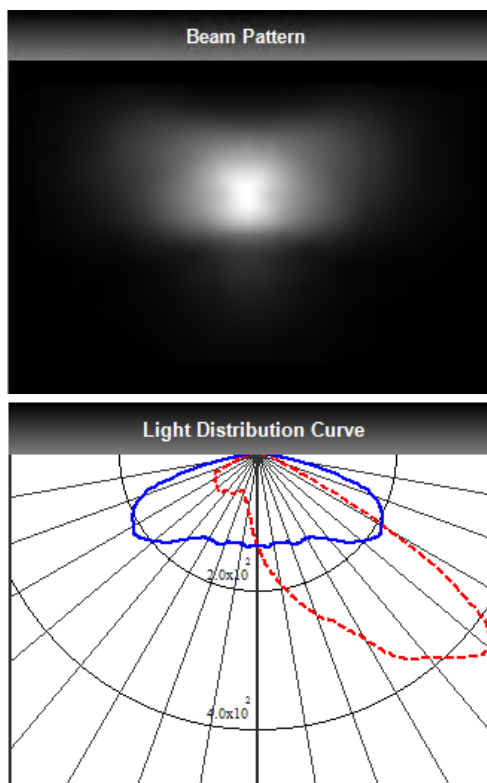

Elevation	Roadway Classification
0°	Type III, Short
5°	Type III, Short
10°	Type IV, Medium
15°	Type IV, Medium
20°	Type IV, Medium

DIALux Simulation Result

Analyzed file: [Download](#)

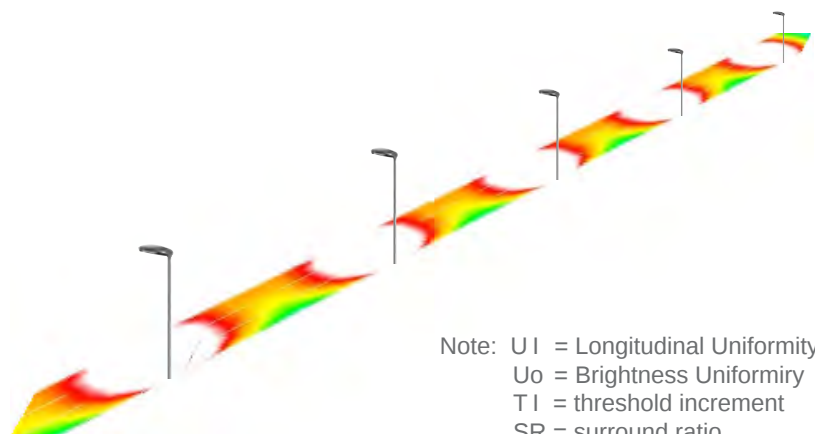

Note: UI = Longitudinal Uniformity
 Uo = Brightness Uniformity
 TI = threshold increment
 SR = surround ratio

Recommend configuration condition

Height	=	10m
Distance	=	35m
Roadwidth	=	10.5m
Elevation	=	0degree
Overhang	=	0m

Result

UI	=	0.8
Uo	=	0.6
TI	=	10%
SR	=	0.6

*The results would be similar if the configuration conditions are equally magnified or minified.

*This testing result is obtained through testing the popular rank LED samples which provided by the original manufacturer. Hence, the testing results would be varied as the users choose same LED model but different rank.

*The analyzed file require DIALux v4.12 and above to open.

LL04CR-BXJ45155L02


Mechanical Specification

1. Fixing method


☒ Glue ☒ Screw ☐ Tape ☐ Fixing-ring ☒ Frame

Note: (1) All dimensions are in mm.
(2) All measurements are ± 0.15 mm unless otherwise indicated.

2. Lens dimension

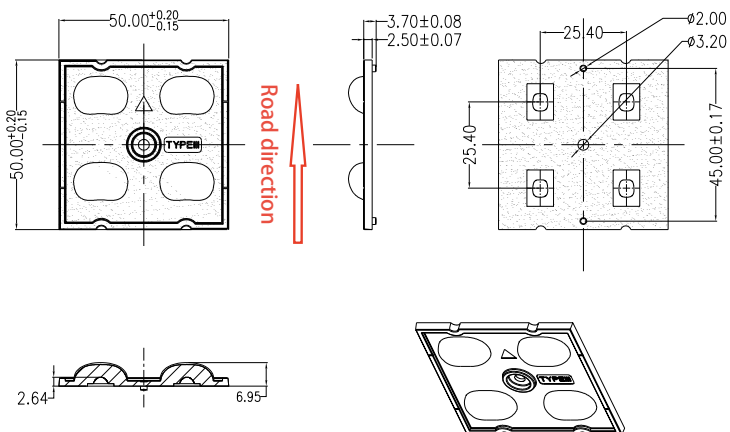

3. Lens + Leds + MCPCB assembly instruction

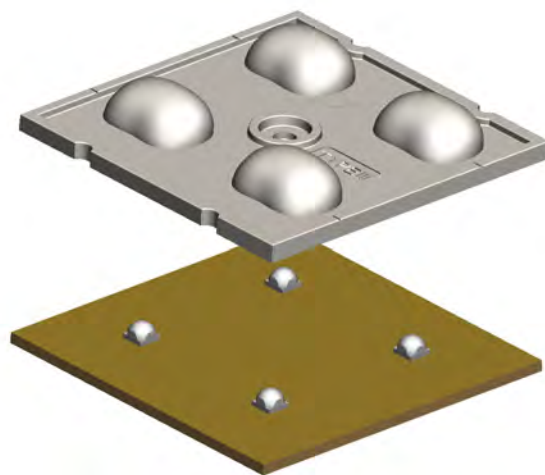

4. Assembly dimension


5. View assembly lens with MCPCB:



LL04CR-BXJ45155L02



Package Specifications

Item	Quantity	Total	Size(L*W*H)	G.W
plastic box	48 pcs/plastic box	48 pcs	32*29*2.15 cm	7.2g
outer box	9 plastic box/outer box	432 pcs	35*31*21 cm	



LL-0989

48 pcs/plastic box

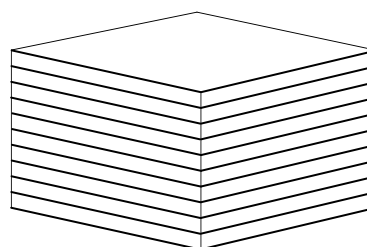

432 pcs/outer box



Note:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[LedLink Optics:](#)

[LL04CR-BXJ45155L02](#)