

HBV Series

Features

- 105°C, 10,000 hours assured
- Low ESR and High ripple current
- RoHS compliance




Marking color: Dark Green

Specifications

Items	Performance																													
Category Temperature Range	-55°C ~ +105°C																													
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																													
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																													
Tanδ (at 120 Hz, 20°C)	See Standard Ratings																													
Endurance	<table><tr><td>Test Time</td><td colspan="4">10,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="4">Within ±30% of initial value</td></tr><tr><td>Tanδ</td><td colspan="4">Less than 200% of specified value</td></tr><tr><td>ESR</td><td colspan="4">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="4">Within specified value</td></tr></table>					Test Time	10,000 Hrs				Capacitance Change	Within ±30% of initial value				Tanδ	Less than 200% of specified value				ESR	Less than 200% of specified value				Leakage Current	Within specified value			
						Test Time	10,000 Hrs																							
						Capacitance Change	Within ±30% of initial value																							
						Tanδ	Less than 200% of specified value																							
						ESR	Less than 200% of specified value																							
	Leakage Current	Within specified value																												
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 10,000 hours at 105°C.																														
Shelf Life Test																														
* After storage for 1,000 hours at 105 ± 2°C with no voltage applied and then being stabilized at 20°C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)																														
Resistance to Soldering Heat (Please refer to page 26 for reflowsoldering conditions)	<table><tr><td>Capacitance Change</td><td colspan="4">Within ±10% of initial value</td></tr><tr><td>Tanδ</td><td colspan="4">Within specified value</td></tr><tr><td>ESR</td><td colspan="4">Within specified value</td></tr><tr><td>Leakage Current</td><td colspan="4">Within specified value</td></tr></table>					Capacitance Change	Within ±10% of initial value				Tanδ	Within specified value				ESR	Within specified value				Leakage Current	Within specified value								
						Capacitance Change	Within ±10% of initial value																							
						Tanδ	Within specified value																							
						ESR	Within specified value																							
	Leakage Current	Within specified value																												
Ripple Current and Frequency Multipliers	<table><tr><td>Frequency (Hz)</td><td>120 ≤ f < 1k</td><td>1k ≤ f < 10k</td><td>10k ≤ f < 100k</td><td>100k ≤ f < 500k</td></tr><tr><td>Multiplier</td><td>0.1</td><td>0.3</td><td>0.6</td><td>1.0</td></tr></table>					Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k	Multiplier	0.1	0.3	0.6	1.0															
	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k																									
Multiplier	0.1	0.3	0.6	1.0																										

Diagram of Dimensions

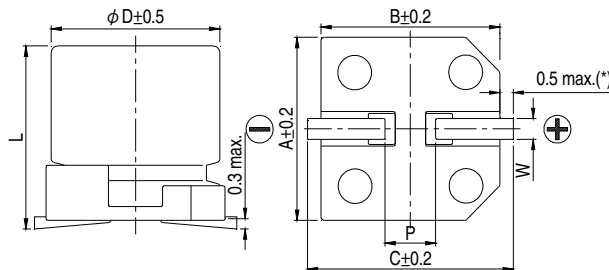

Lead Spacing and Diameter


Unit: mm

φ D	L	A	B	C	W	P ± 0.2
6.3	5.8 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
8	10.0 ± 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1
10	10.0 ± 0.5	10.3	10.3	11.0	0.7 ~ 1.3	4.7
10	12.5 ± 0.5	10.3	10.3	11.0	0.7 ~ 1.3	4.7


(*): For 6.3φ is 0.4 max.

Marking

φ D = 6.3



φ D = 8 ~ 10

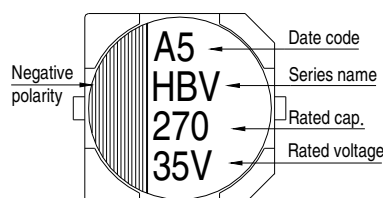



Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Standard Ratings

Rated Volt. (V)	Surge Voltage (V)	Capacitance (μF)	Size ϕ D×L(mm)	Tanδ (120 Hz, 20°C)	L C (μA)	E S R (mΩ/at 100kHz, 20°C max.)	Rated R. C. (mA/rms at 100k Hz, 105°C)
16V (1C)	18.4	82	6.3 × 5.8	0.16	13.1	50	1,300
		150	6.3 × 7.7		24	30	2,000
		270	8 × 10		43.2	27	2,300
		470	10 × 10		75.2	20	2,500
25V (1E)	28.8	47	6.3 × 5.8	0.14	11.8	50	1,300
		56	6.3 × 5.8		14	50	1,300
		68	6.3 × 7.7		17	30	2,000
		100	6.3 × 7.7		25	30	2,000
		150	8 × 10		37.5	27	2,300
		220	8 × 10		55	27	2,300
		330	10 × 10		82.5	20	2,500
			10 × 12.5		82.5	16	2,900
35V (1V)	40.3	27	6.3 × 5.8	0.12	9.5	60	1,300
		33			11.6		
		47			16.5		
		68	6.3 × 7.7		23.8	35	2,000
		100	8 × 10		35	27	2,300
		150	8 × 10		52.5	27	2,300
		220	10 × 10		77	20	2,500
		270	10 × 10		94.5	20	2,500
50V(1H)	57.5	22	6.3 × 5.8	0.10	11	80	1,100
		33	6.3 × 7.7		16.5	40	1,600
		47	8 × 10		23.5	30	1,800
		68	8 × 10		34	30	1,800
		100	10 × 10		50	28	2,000
63V(1J)	72.5	10	6.3 × 5.8	0.08	6.3	120	1,000
		22	6.3 × 7.7		13.9	80	1,500
		27	8 × 10		17	40	1,700
		33			20.8		
		47			29.6		
		56	10 × 10		35.3	30	1,800
		68			42.8		
		82			51.7		
80V(1K)	92.0	22	8 × 10	0.08	17.6	45	1,550
		33	10 × 10		26.4	36	1,700
		47	10 × 10		37.6	36	1,700

Part Numbering System

HBV Series	220 μ F	$\pm 20\%$	25V	Carrier Tape	8 $\phi \times 10L$	Pb-free and PET coating case
HBV	221	M	1E	TR	-	0810
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size
						Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lelon:](#)

[HBV101M0J0606-TR0](#) [HBV101M1E0608-TR0](#) [HBV101M1H1010-TR0](#) [HBV151M1A0608-TR0](#) [HBV151M1V0810-TR0](#) [HBV220M1H0606-TR0](#) [HBV221M0J0608-TR0](#) [HBV221M1E0810-TR0](#) [HBV271M1V1010-TR0](#) [HBV330M1C0606-TR0](#) [HBV330M1H0608-TR0](#) [HBV331M1A0810-TR0](#) [HBV331M1E1010-TR0](#) [HBV331M1V1013-TR0](#) [HBV470M1V0606-TR0](#) [HBV560M0J0810-TR0](#) [HBV560M1E0606-TR0](#) [HBV561M1A1010-TR0](#) [HBV680M1A0606-TR0](#) [HBV680M1H0810-TR0](#) [HBV680M1V0608-TR0](#) [HBV680M1HTR-0810](#) [HBV271M1VTR-1010](#) [HBV331M1ETR-1010](#) [HBV221M1ETR-0810](#) [HBV100M1JTR-0606](#) [HBV330M1KTR-1010](#) [HBV560M1ETR-0606](#)