

## SUMMARY

### # Wires

Low voltage 34



*Image is for illustrative purpose only*

Series 2P  
Termination type Male solder  
IP rating 50  
AWG wire size 0.00 - 0.00  
Cable Ø 5.30 - 7.20 mm  
Status active

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model CR\*: Free receptacle with cable collet  
Keying 3 keys (alpha=0, gamma=80; Plug: female contacts; Receptacle: male contacts)  
Housing Material PEI (Polyetherimide), gray  
Weight 10.13 g

### Performance

Configuration 2P.M34 : 34 Low V.  
Insulator L: PEEK for solder contacts  
Rated Current 1.5 Amps

### Specifications

Test voltage (kV rms) Contact-contact: 0.7  
Air clearance min.: 0.3 mm  
Creepage distance min.: 0.3 mm


### Others

Endurance (Shell): >1000 mating cycles  
Temp (min / max): -50°C / +170°C  
F ret (min): 150 N

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

F ret (max): 250 N  
Steam sterilization: > 100 times

# DRAWINGS

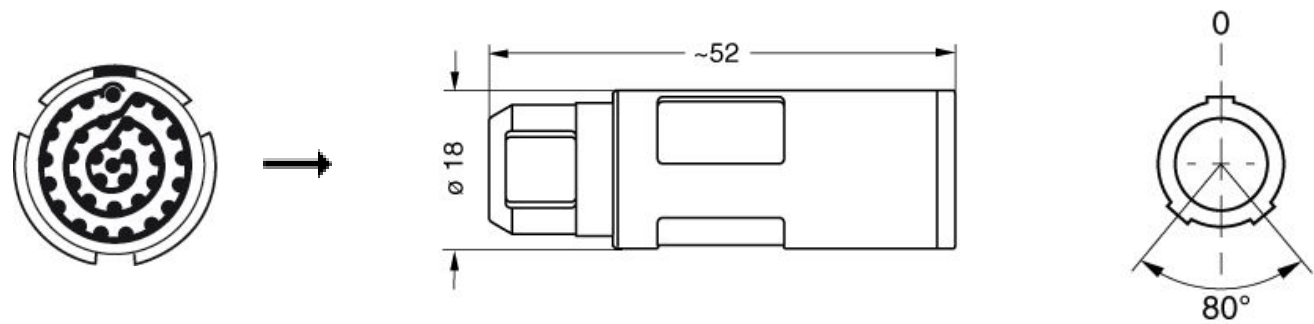

## Dimensions

	A	L
mm.	18	52
in.	0,71	2,05

# RECOMMENDED BY LEMO

## Tools

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

[CRH.M34.SLA.C72G](#)