



www.lemo.com

SUMMARY

Wires

5 Low voltage



Image is for illustrative purpose only

Series 1K

Female print 90° PCB Termination type

IP rating 68

AWG wire size 30.00 - 22.00 Cable Ø 0.00 - 0.00 mm

Status active

Matching parts FGG.1K.305.CLAC20

Download

Request a quote PCB Eagle Pattern PCB Altium Pattern PCB KiCad Pattern

Catalog

TECHNICAL DETAILS

Mechanics

EE*: Fixed receptacle, nut fixing, with elbow contacts for printed circuit (back panel Shell Style/Model

mounting)

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material**

brass latch sleeve and mid pieces

Weight 20.02 g

Performance

Configuration 1K.305 : 5 Low Voltage

Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current

Specifications

Contact Type: Print (elbow) Contact Dia.: 0.9 mm (0.035in)

R (max): 4.8 mOhm

Vtest (contact-shell): 1150 V (AC), 1630 V (DC) Vtest (contact-contact): 1250 V (AC), 1770 V (DC)

Others


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 95 dB (10 MHz) Shielding (min): 80 dB (1 GHz) Salt Spray Corrosion: >1000 hr

DRAWINGS

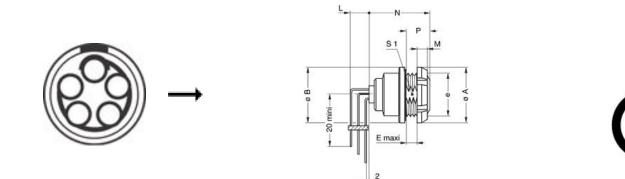

0°

Dimensions

	А	В	E	М	N	Р	S1	e
mm.	20	20	6.2	3.5	24.3	10	14.5	M16x1.0
in.	0,79	0,79	0,24	0,14	0,96	0,39	0,57	

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

EEG.1K.305.CLV