



www.lemo.com

SUMMARY

Wires

Low voltage 7

Image is for illustrative purpose only

Series 2S

Termination type Male solder

IP rating 50

AWG wire size 0.00 - 22.00

Cable Ø 0.00 - 0.00 mm

Status active

Matching parts PCA.2S.307.CLLC52

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model FAA*: Fixed plug, non-latching, nut fixing

Keying Hermaphroditic keying (half moon insert) with male pin 1

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 15.69 g

Performance

Configuration 25.307 : 3 (1.3 mm) + 4 (0.9 mm) Low Voltage

Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current

Specifications

Contact Type: Solder

Vtest: 800 V (AC), 1200 V (DC) Vtest: 800 V (AC), 1200 V (DC)

Others


Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +250°C

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >144 hr

DRAWINGS

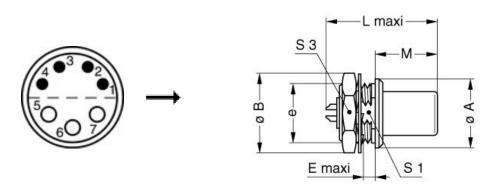



Dimensions

	А	А	В	E	L	М	S1	S 3	e
mm.	18	18	19.5	4	25	13.8	13.5	17	M15x1.0
in.	0,71	0,71	0,77	0,16	0,98	0,54	0,53	0,67	

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

FAA.2S.307.CLA