

SUMMARY

Wires

High voltage 1



Image is for illustrative purpose only

Series 05
Termination type Female solder High-Voltage
IP rating 50
AWG wire size 30.00 - 22.00
Cable Ø 0.00 - 0.00 mm
Status active
Matching parts [FFR.05.403.LLAE142](#)

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model PES*: Fixed receptacle, nut fixing, with cable crimping (back panel mounting)
Keying Circular, female
Housing Material Aluminum alloy (anodized) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Weight 2.08 g

Performance

Configuration
Insulator
Rated Current 4 Amps

Specifications

Contact Type: Solder
Test voltage d.c kV 12
Contact resistance <8 mOhms


Others

Endurance (Shell): >200 mating cycles
Radiation resistance 10e6 Gray

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Working temperature: -20 deg C to + 125 deg C
Contact ret F (min): 40 N

DRAWINGS

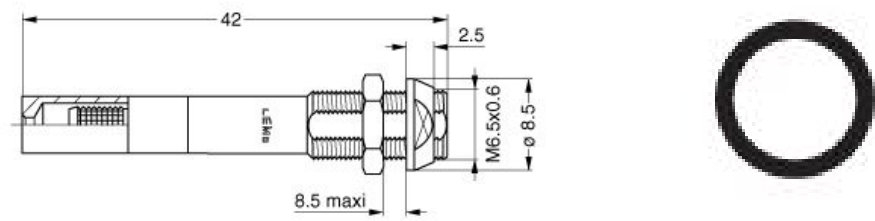

Dimensions

	A	L
mm.	8.5	42
in.	0,33	1,65

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

[PES.05.403.LLLE142](#)