

ANT-5GW-FPC-V Series Flexible Embedded Cellular Sub-6 5G Antennas

The Linx ANT-5GW-FPC-V series antennas are 120 mm x 20 mm adhesive flexible printed circuit (FPC) antennas for 5G New Radio, LTE, and cellular IoT (LTE-M, NB-IoT) applications requiring a cost-effective but capable antenna solution.

The ANT-5GW-FPC-V antennas provide a ground plane independent dipole internal/embedded antenna solution. The flexibility and adhesive backing make the ANT-5GW-FPC-V series easy to mount in RF transparent (e.g. plastic) enclosures, enabling environmental sealing and for protection from antenna damage.

Connection is made to the radio via a coaxial cable terminated in an MHF1/U.FL-type plug (female socket), or MHF4-type plug (female socket) connector.



Features

- Wide Bandwidth 617 MHz to 5000 MHz
- Performance at 617 MHz to 698 MHz
 - VSWR: ≤ 2.6
 - Peak Gain: 4.6 dBi
 - Efficiency: 64%
- Performance at 3300 MHz to 4200 MHz
 - VSWR: ≤ 1.6
 - Peak Gain: 6.3 dBi
 - Efficiency: 70%

Applications

- Worldwide 5G/4G/3G/2G
- Cellular IoT: LTE-M (Cat-M1) and NB-IoT
- Internet of Things (IoT) devices
- Home and business networking

Ordering Information

Part Number	Cable Length	Connector
ANT-5GW-FPC-V50UF	50 mm (1.97 in)	U.FL
ANT-5GW-FPC-V100UF	100 mm (3.94 in)	U.FL
ANT-5GW-FPC-V150UF	150 mm (5.91 in)	U.FL
ANT-5GW-FPC-V200UF	200 mm (7.87 in)	U.FL
ANT-5GW-FPC-V50M4	50 mm (1.97 in)	MHF4-type
ANT-5GW-FPC-V100M4	100 mm (3.94 in)	MHF4-type
ANT-5GW-FPC-V150M4	150 mm (5.91 in)	MHF4-type
ANT-5GW-FPC-V200M4	200 mm (7.87 in)	MHF4-type

Available from Linx Technologies and select distributors and representatives.

Table 1. Electrical Specifications

Bands	Frequency Range	VSWR (max.)	Peak Gain (dBi)	Avg. Gain (dBi)	Efficiency (%)
71	617 MHz to 698 MHz	2.6	4.6	-2.1	64
12, 13, 14, 17, 26, 28, 29, 44, 67, 68, 85, n83	698 MHz to 803 MHz	2.4	6.6	-2.2	64
5, 18, 19, 20, 26, 27, n82, n89	791 MHz to 894 MHz	2.4	7.9	-1.5	75
8, 11, 21, 32, 45, 50, 51, 74, 75, 76, n81, n91, n92, n93, n94	832 MHz to 1518 MHz	2.7	7.9	-1.9	72
24	1525 MHz to 1661 MHz	1.6	6.2	-1.0	82
1, 2, 3, 4, 9, 10, 25, 33, 34, 35, 36, 37, 39, 65, 66, 70, n80, n84, n86, n95	1695 MHz to 2200 MHz	1.8	4.9	-1.9	71
7, 30, 38, 40, 41, 53, 69, n90	2300 MHz to 2690 MHz	1.8	4.1	-1.5	76
22, 42, 43, 48, 49, 52, n77, n78	3300 MHz to 4200 MHz	1.6	6.3	-1.8	70
n79	4400 MHz to 5000 MHz	2.6	7.9	-2.7	61
Polarization	Linear				
Radiation	Omnidirectional				
Impedance	50 Ω				
Wavelength	1/2-wave				
Max Power	2 W				
Electrical Type	Dipole				

Electrical specifications and plots measured with the antenna on a 2 mm (0.08 in) thick plastic sheet.

Table 2. Mechanical Specifications

Part Number	Connection	Coaxial Cable, minimum inside bend radius	Weight
ANT-5GW-FPC-V50UF	MHF1/U.FL-type plug	1.13 mm: 5.0 mm (0.20 in)	1.4 g (0.05 oz)
ANT-5GW-FPC-V100UF	MHF1/U.FL-type plug	1.13 mm: 5.0 mm (0.20 in)	1.5 g (0.05 oz)
ANT-5GW-FPC-V150UF	MHF1/U.FL-type plug	1.13 mm: 5.0 mm (0.20 in)	1.7 g (0.06 oz)
ANT-5GW-FPC-V200UF	MHF1/U.FL-type plug	1.13 mm: 5.0 mm (0.20 in)	1.8 g (0.06 oz)
ANT-5GW-FPC-V50M4	MHF4-type plug	1.13 mm: 5.0 mm (0.20 in)	1.3 g (0.05 oz)
ANT-5GW-FPC-V100M4	MHF4-type plug	1.13 mm: 5.0 mm (0.20 in)	1.5 g (0.05 oz)
ANT-5GW-FPC-V150M4	MHF4-type plug	1.13 mm: 5.0 mm (0.20 in)	1.6 g (0.06 oz)
ANT-5GW-FPC-V200M4	MHF4-type plug	1.13 mm: 5.0 mm (0.20 in)	1.8 g (0.06 oz)
Operating Temp. Range	-40 °C to +85 °C (-40 °F to 185 °F)		
Storage Temp. Range	-40 °C to +85 °C (-40 °F to 185 °F)		
Dimensions	120.0 mm x 20.5 mm x 0.1 mm (4.72 in x 0.79 in x 0.004 in)		

Antenna Mounting

The ANT-5GW-FPC-V antenna is a flexible, adhesive backed antenna that allows it to be permanently installed onto non-metallic surfaces. The adhesive backing is 3M 467MP™/200MP, which provides outstanding adhesion to high surface energy plastics. The adhesive delivers excellent shear strength to resist slippage and edge lifting, but can be repositioned before the adhesive cures, allowing for accurate positioning. This adhesive is highly resistant to solvents, humidity and moisture, as well as heat up to 204 °C (400 °F) for short periods.

The antenna should never be bent to the point of creating a crease or allowing the angle of the bend to fall below 90 degrees (i.e. become acute) as this will impair function and may cause permanent damage.

Packaging Information

The ANT-5GW-FPC-V antenna is individually packaged in a plastic bag and placed in bags of 100 pcs. Distribution channels may offer alternative packaging options.

Product Dimensions

Figure 1 provides dimensions for the ANT-5GW-FPC-V series antenna.

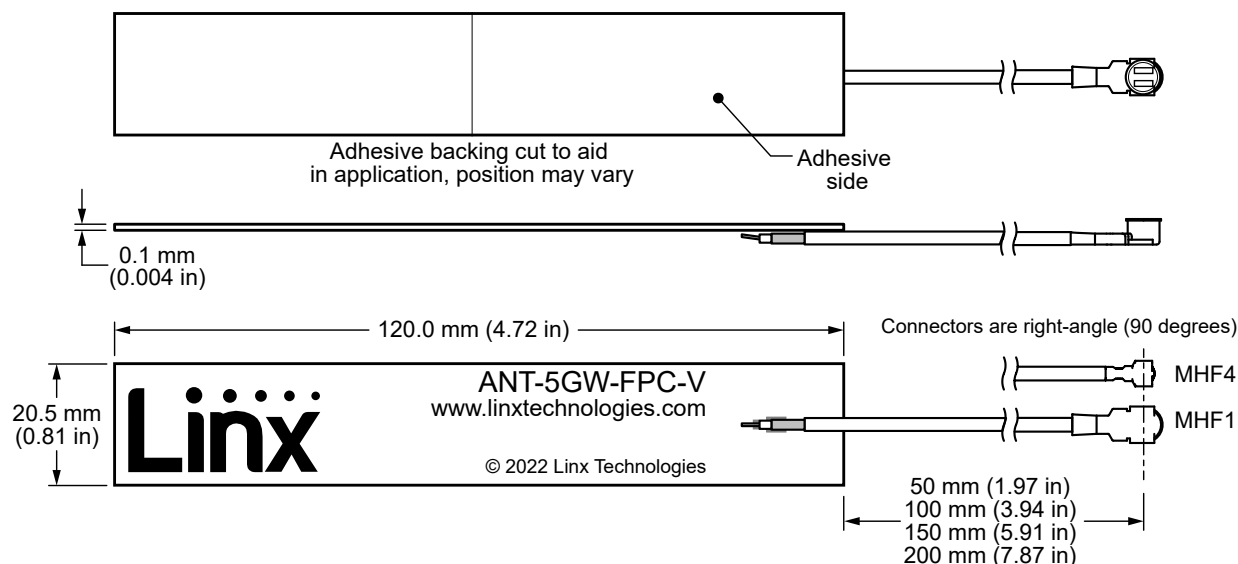


Figure 1. ANT-5GW-FPC-V Series Antenna Dimensions

VSWR

Figure 2 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

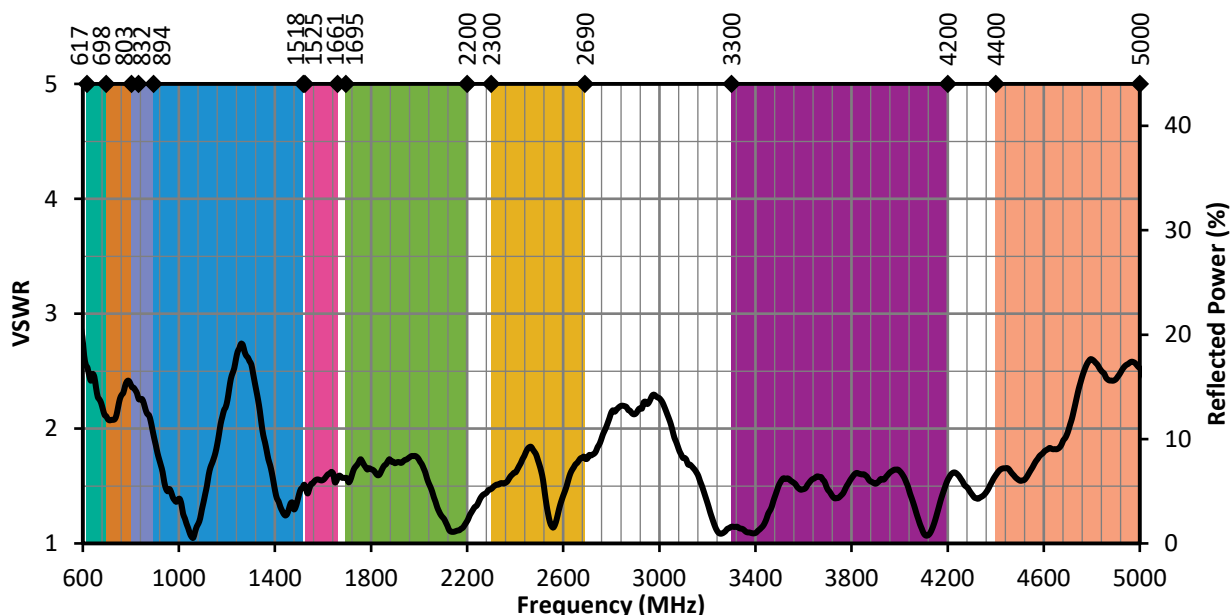


Figure 2. ANT-5GW-FPC-V Antenna VSWR with Frequency Band Highlights

Return Loss

Return loss (Figure 3), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

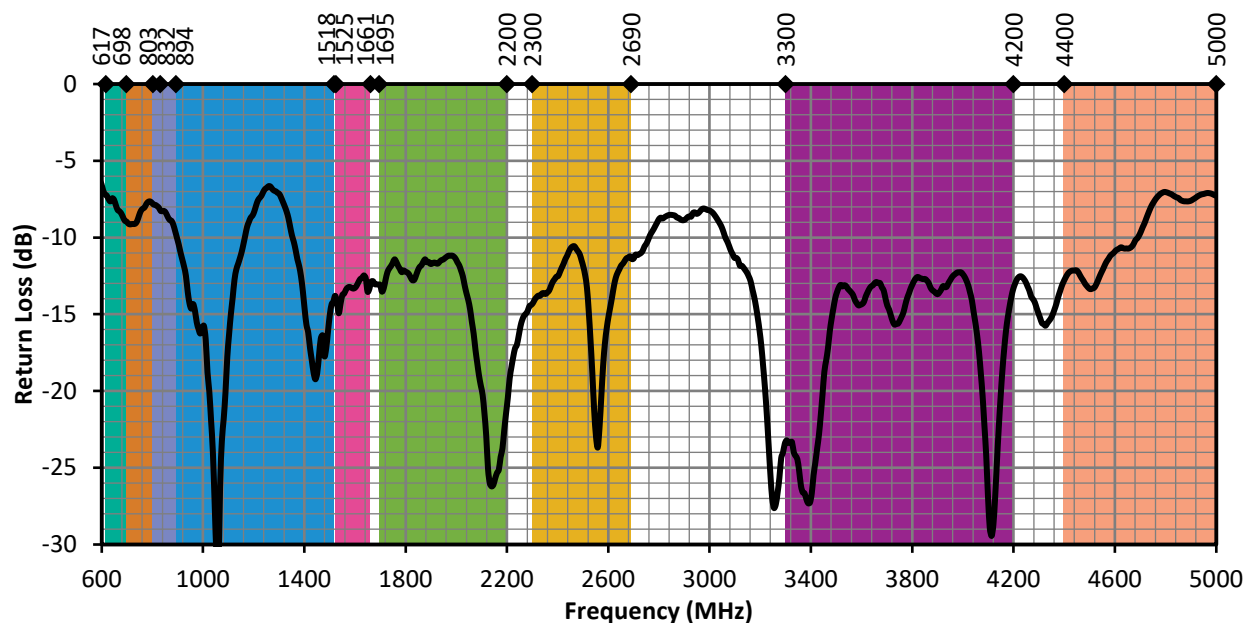


Figure 3. ANT-5GW-FPC-V Antenna Return Loss with Frequency Band Highlights

Peak Gain

The peak gain across the antenna bandwidth is shown in Figure 4. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance, at a given frequency, but does not consider any directionality in the gain pattern.

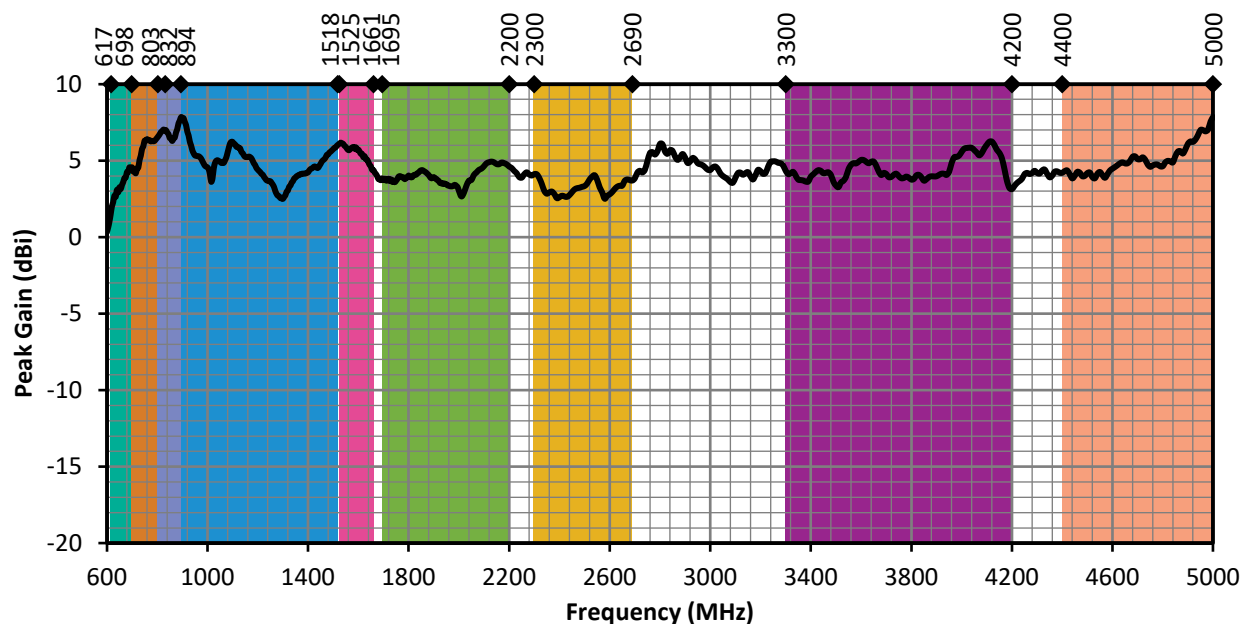


Figure 4. ANT-5GW-FPC-V Antenna Peak Gain with Frequency Band Highlights

Average Gain

Average gain (Figure 5), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

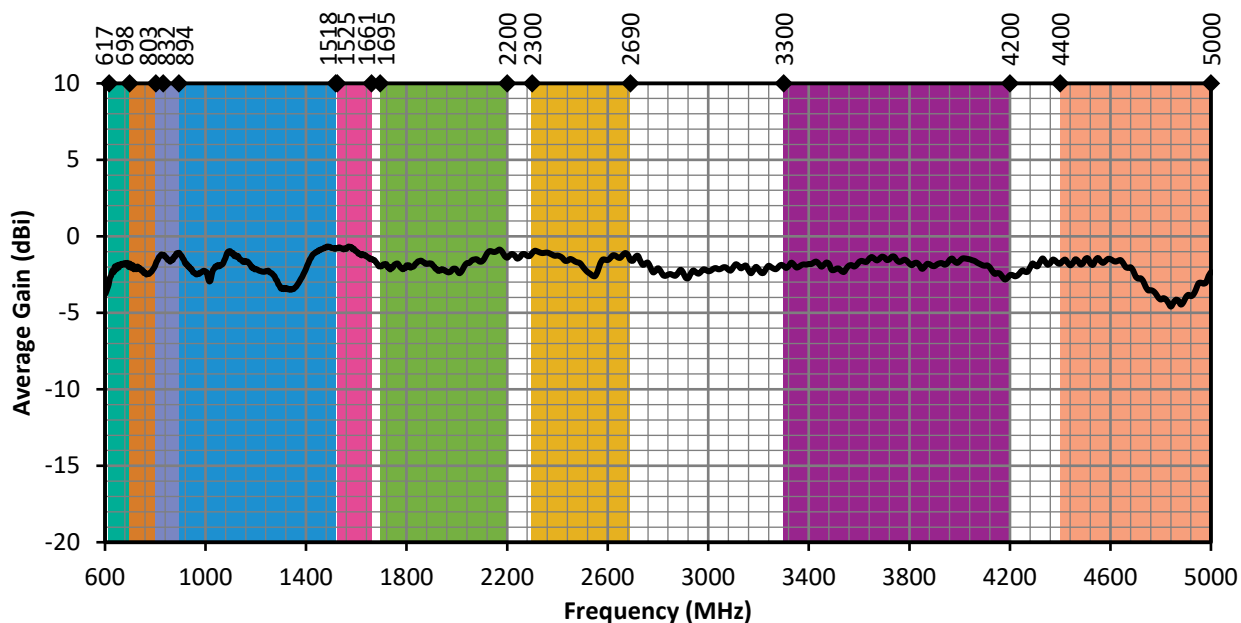


Figure 5. ANT-5GW-FPC-V Antenna Average Gain with Frequency Band Highlights

Radiation Efficiency

Radiation efficiency (Figure 6), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.


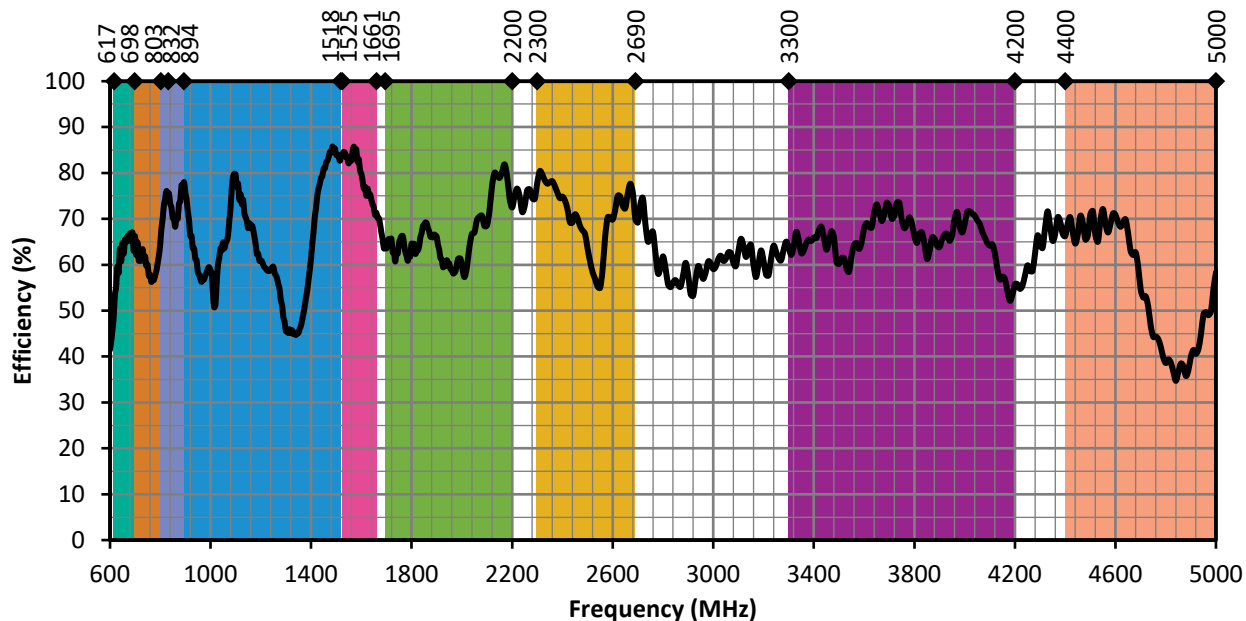


Figure 6. ANT-5GW-FPC-V Antenna Radiation Efficiency with Frequency Band Highlights


Radiation Patterns

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns (Figure 7), are shown using polar plots covering 360 degrees. The antenna graphic above the plots provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.


Radiation Patterns - Vertical

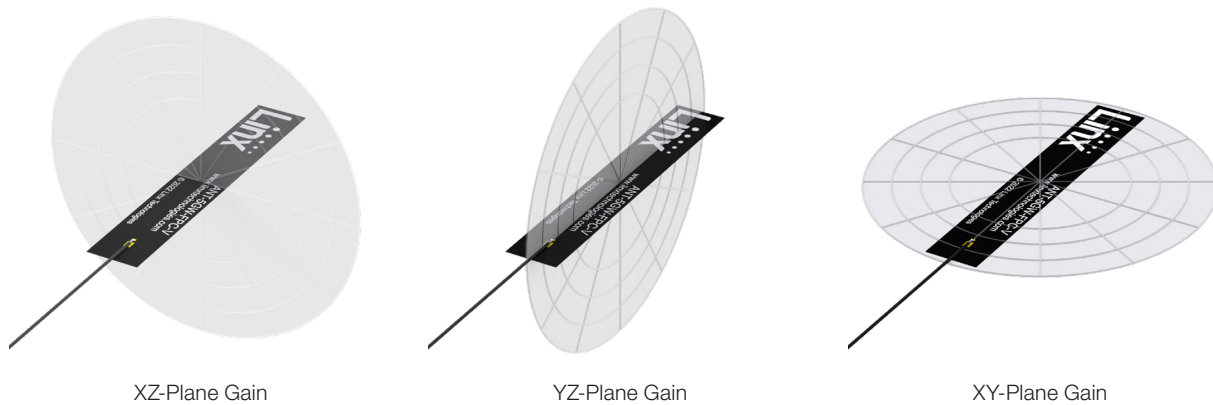

617 MHz to 698 MHz (660 MHz)

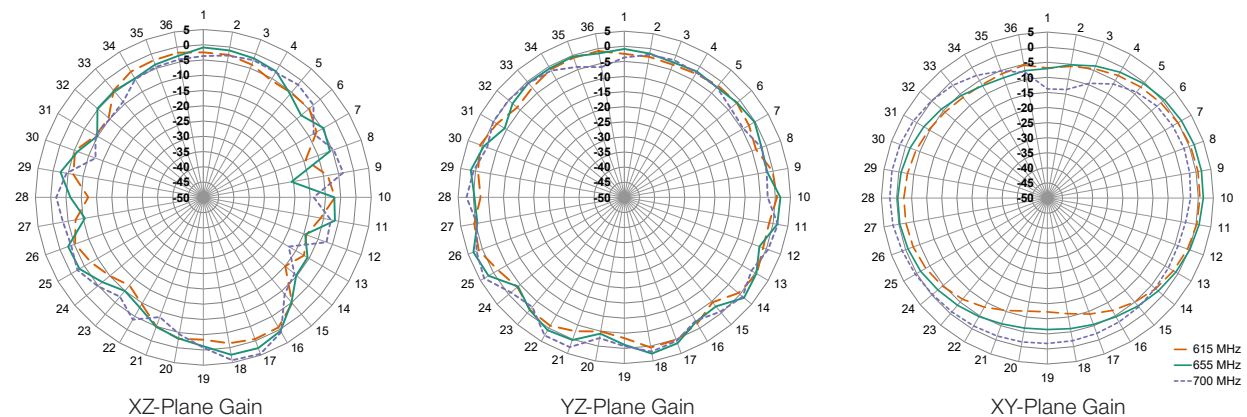


698 MHz to 803 MHz (750 MHz)

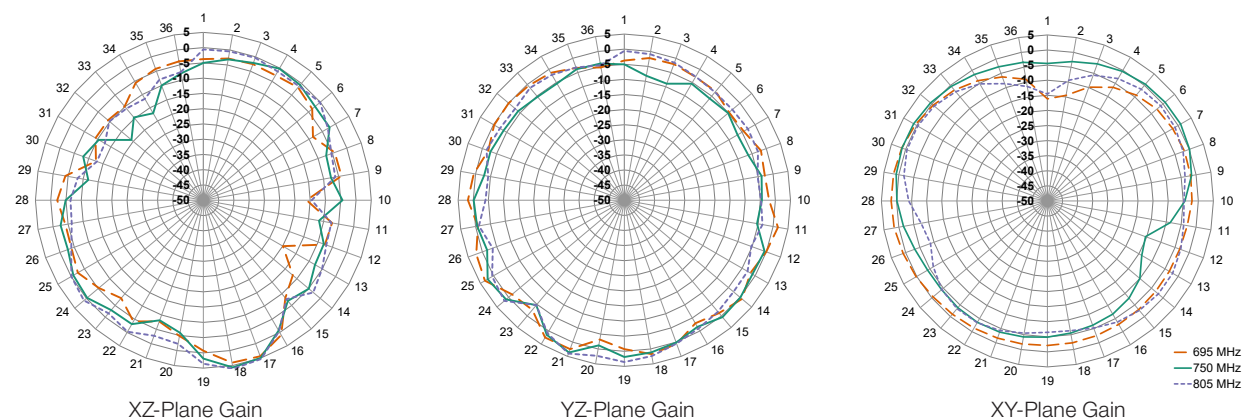


Radiation Patterns


791 MHz to 894 MHz (840 MHz)

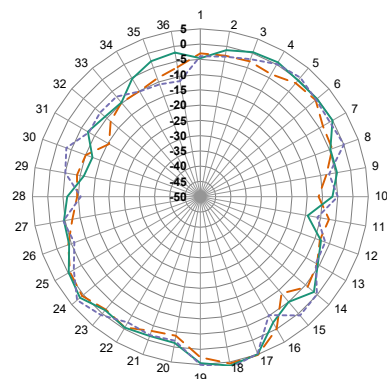

XZ-Plane Gain

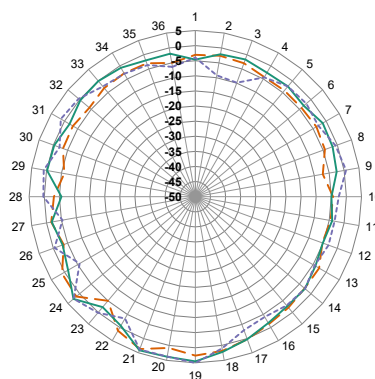


YZ-Plane Gain

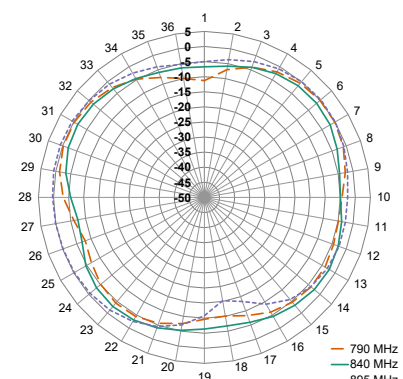


XY-Plane Gain


832 MHz to 1518 MHz (1175 MHz)

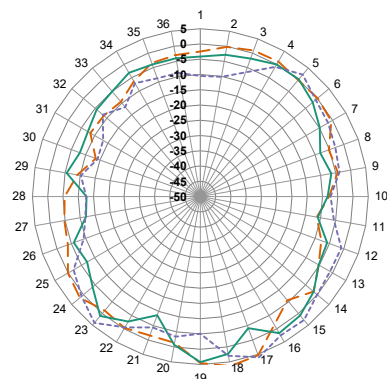

XZ-Plane Gain

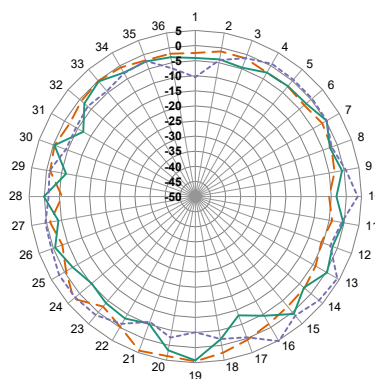


YZ-Plane Gain

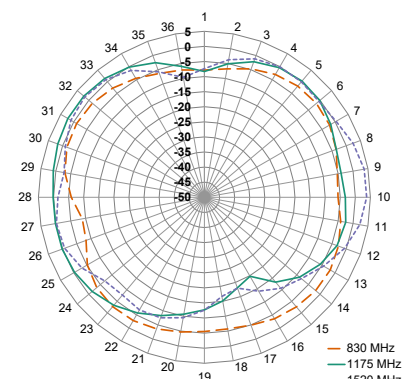


XY-Plane Gain


1525 MHz to 1661 MHz (1590 MHz)

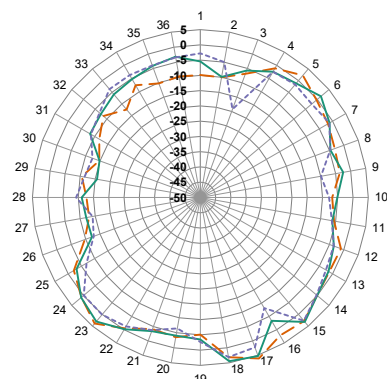

XZ-Plane Gain

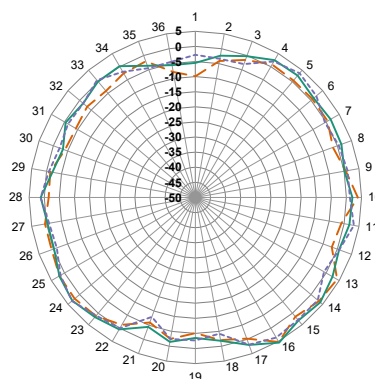


YZ-Plane Gain

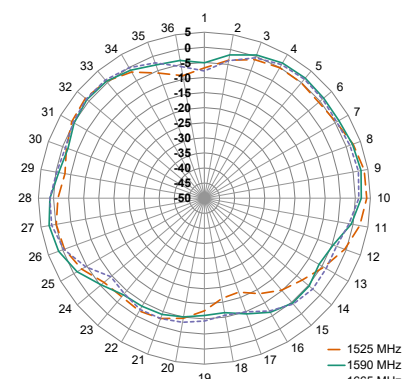


XY-Plane Gain

Radiation Patterns


1695 MHz to 2200 MHz (1945 MHz)

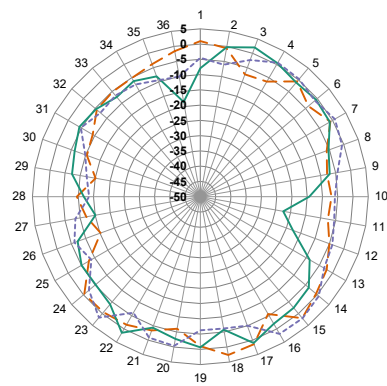

XZ-Plane Gain

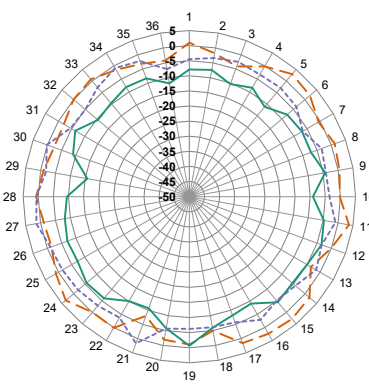


YZ-Plane Gain

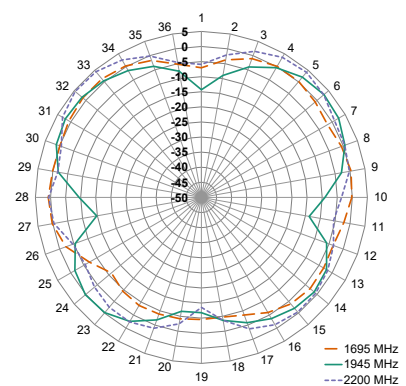


XY-Plane Gain


2300 MHz to 2690 MHz (2490 MHz)

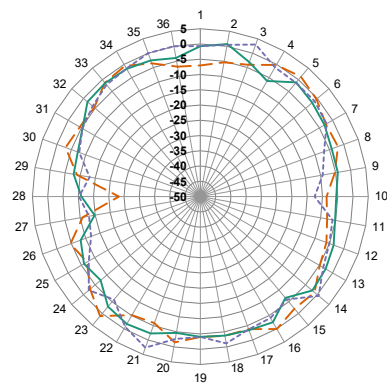

XZ-Plane Gain

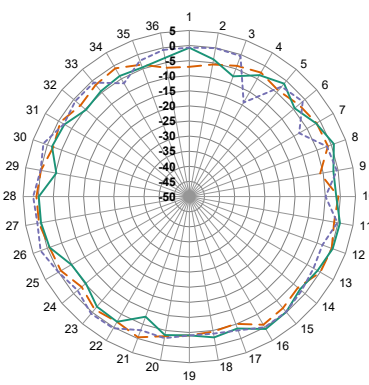


YZ-Plane Gain

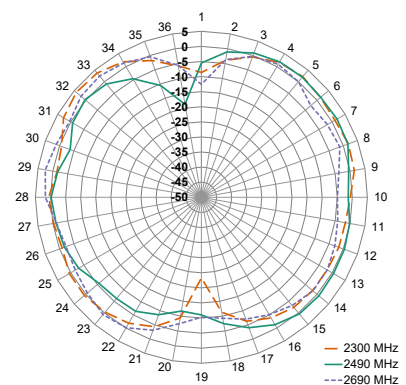


XY-Plane Gain


3300 MHz to 4200 MHz (3750 MHz)

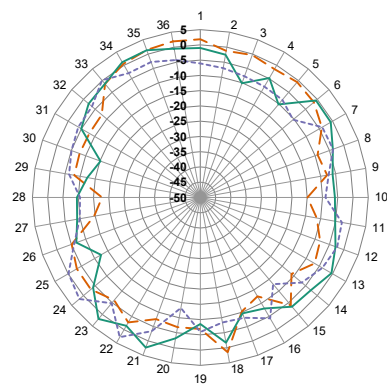

XZ-Plane Gain

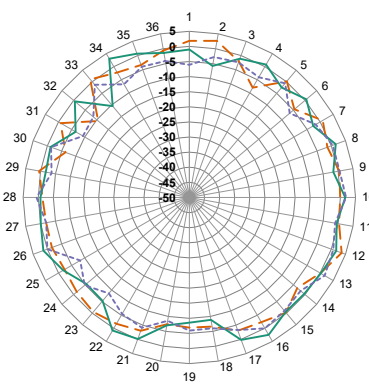

YZ-Plane Gain

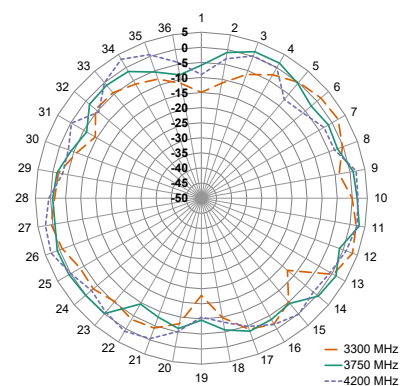

XY-Plane Gain

Radiation Patterns

4400 MHz to 5000 MHz (4700 MHz)

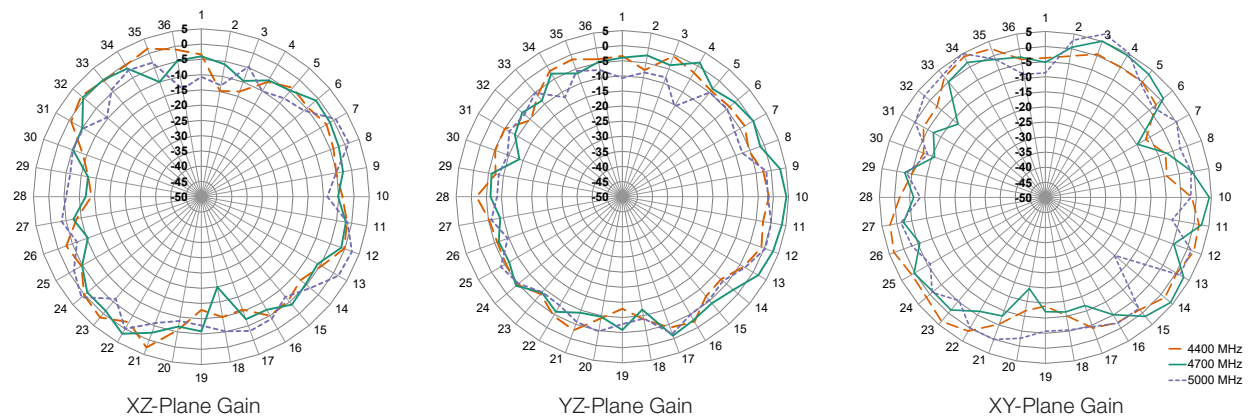


Figure 7. Radiation Patterns for ANT-5GW-FPC-V Series Antenna

Website: <http://linxtechnologies.com>
Linx Offices: 159 Ort Lane, Merlin, OR, US 97532
Phone: +1 (541) 471-6256
E-MAIL: info@linxtechnologies.com

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Bluetooth is a registered trademark of Bluetooth SIG, Inc. ZigBee is a registered trademark of ZigBee Alliance, Inc. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2022 Linx Technologies

All Rights Reserved

Doc# DS22315-264ANT



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Linx Technologies:

[ANT-5GW-FPC-V50UF](#) [ANT-5GW-FPC-V200M4](#) [ANT-5GW-FPC-V50M4](#) [ANT-5GW-FPC-V200UF](#) [ANT-5GW-FPC-V100UF](#) [ANT-5GW-FPC-V150M4](#) [ANT-5GW-FPC-V150UF](#) [ANT-5GW-FPC-V100M4](#)