
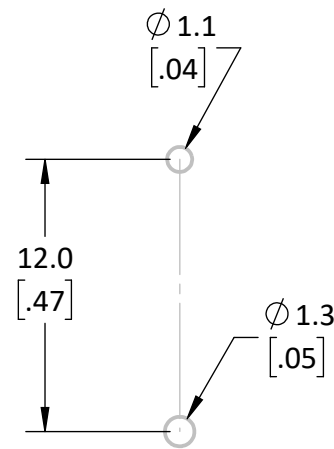
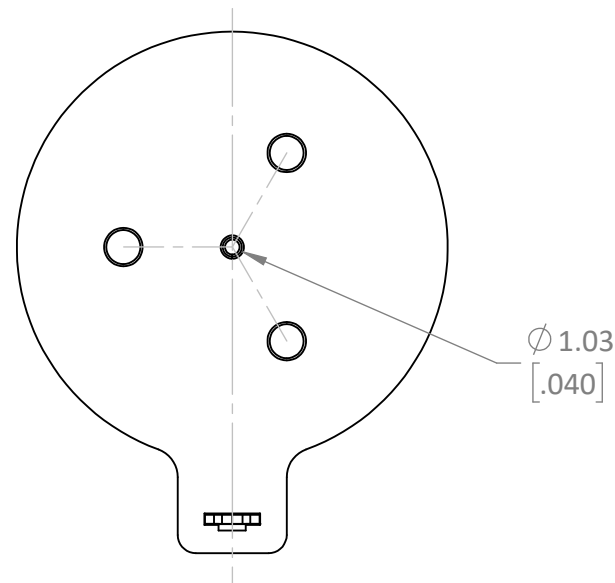


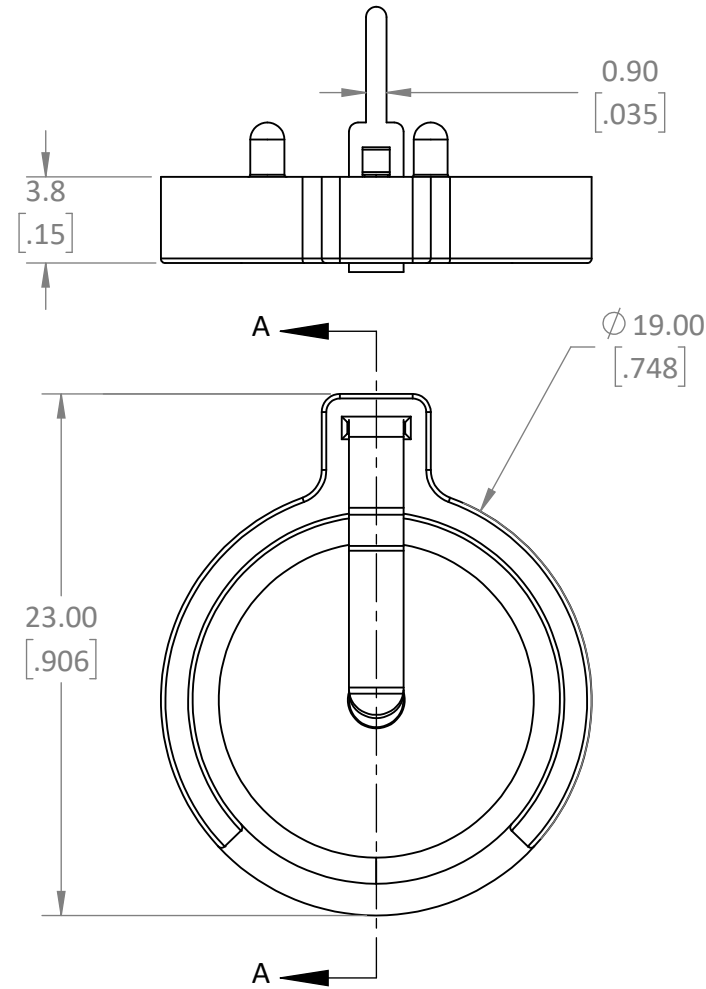

RECOMMENDED PTH
BOARD LAYOUT

- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN MILLIMETERS [IN].
 2. DIMENSIONS APPLY AFTER FINISHING.
 3. MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE, USE MATERIALS THAT DO NOT CONTAIN REACH SUBSTANCES OF VERY HIGH CONCERN >1000ppm, AND USE DRC CONFLICT-FREE SOURCED MATERIALS.
 4. ELECTRICAL SPECIFICATIONS ARE FOR LISTED FOR REFERENCE ONLY.
 1. CONTACT RESISTANCE: NTE 50m Ω
 2. INSULATION RESISTANCE: 100M Ω MAX
 3. DIELECTRIC RESISTANCE: 500VAC
 5. MECHANICAL PROPERTIES
 1. MATERIAL: PBT BLACK
 2. OPERATING TEMPERATURE: -25 $^{\circ}$ - +85 $^{\circ}$ C
 6. PACKAGE IN TRAY.

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.				Linx 159 ORT LANE MERLIN, OR 97532	
MATERIAL: PBT, STEEL BRASS				TITLE: BATTERY HOLDER THRU MOUNT PCB CR1620	
WEIGHT:		INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5.		PROJECTION: 	
FINISH: BLACK, NiSn GOLD		DRAWN: JHAGER ENGR: SHAWN H		SIZE B	
		DT: 5/27/22 DT: 5/27/22		DWG. NO. BAT-HLD-011-THM	
		SCALE: 3:1		DO NOT SCALE DRAWING	
				REV A	
				SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Linx Technologies:](#)

[BAT-HLD-011-THM](#)