

CLASS L – KLPC SERIES FUSES

POWR-PRO® 600 V ac • Time-Delay • 200-6000 A


Description

KLPC series POWR-PRO® fuses meet or exceed the most stringent project specifications, including silver links, silver-plated copper end bells, glass-reinforced melamine bodies, O-ring seals between body and end bells, and granular quartz fillers.

Applications

- Switchboard mains and feeders
- Motor control center mains
- Large motor branch circuits
- Protection of power circuit breakers

Features/Benefits

- POWR-PRO® Performance
- Best-in-class time-delay withstand
- Current-Limiting
- Easily coordinated with other system components
- 300 kA AC Interrupting Rating (self-certified)

Specifications

Voltage Ratings

Ac: 600 V
Dc: 480 V

Interrupting Ratings

Ac: 200 kA rms symmetrical
300 kA rms symmetrical
(Littelfuse self-certified)

Ampere Range Approvals

Dc: 20,000 A
200 – 6000 A
Ac: Standard 248-10, Class L
UL Listed 601–6000 A
(File: E81895)
UL Recognized 200–600 A
(File: E71611)
CSA Certified 601A-6,000A.
(File: LR29862)
Federal Specifications 700–6000 A
(QPL-W-F-1814)
Dc: Littelfuse self-certified

Ordering Information

AMPERE RATINGS					
200	500	800	1350	2000	3000
250	600	900	1400	2100	3500
300	601	1000	1500	2200	4000
350	650	1100	1600	2300	4500
400	700	1200	1800	2400	5000
450	750	1300	1900	2500	6000

SERIES	AMPERAGE	CATALOG NUMBER	ORDERING NUMBER
KLPC	800	KLPC800	KLPC800.X


Web Resources

TC Curves, downloadable CAD drawings and other technical information: littelfuse.com/klpc

Dimensions

Please refer to Class L dimensions page 2.

Peak Let-Thru Curve

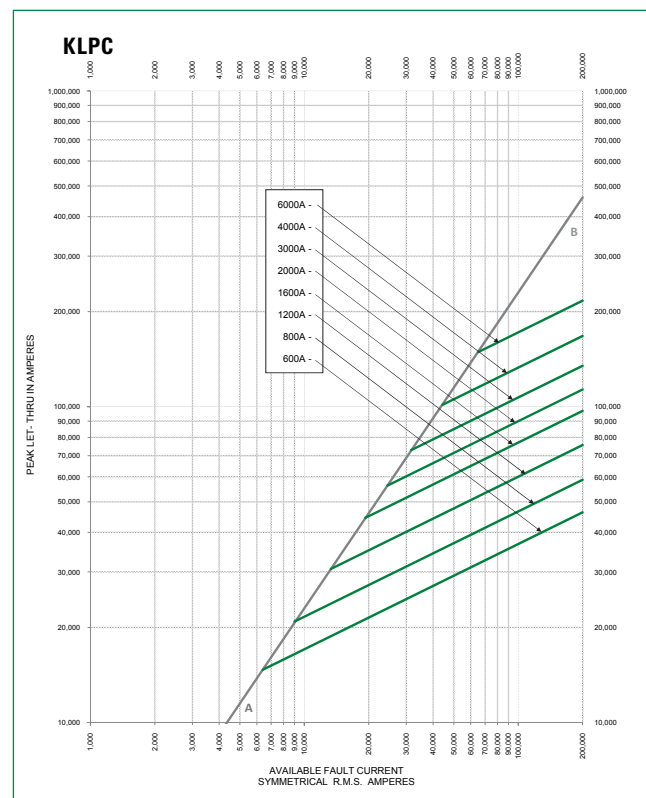

Note: For more information, see Peak Let-Thru Table

CLASS L – KLPC SERIES FUSES

Current-Limiting Effects of KLPC (600 V) Fuses

SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS							
	800 A	1200 A	1600 A	2000 A	3000 A	4000 A	5000 A	6000 A
5,000	5,000	5,000	5,000	5,000	5,000	5,000	5,000	5,000
10,000	8,800	10,000	10,000	10,000	10,000	10,000	10,000	10,000
15,000	10,500	13,500	15,000	15,000	15,000	15,000	15,000	15,000
20,000	12,000	15,000	19,000	20,000	20,000	20,000	20,000	20,000
25,000	13,000	16,000	21,000	24,000	25,000	25,000	25,000	25,000
30,000	14,000	18,000	23,000	26,000	30,000	30,000	30,000	30,000
35,000	15,000	19,000	24,000	27,000	32,000	35,000	35,000	35,000
40,000	16,000	20,000	25,000	28,000	34,000	40,000	40,000	40,000
50,000	17,000	22,000	27,000	31,000	37,000	42,500	50,000	50,000
60,000	18,000	24,000	29,000	34,000	40,000	46,000	52,000	60,000
80,000	20,000	26,000	32,000	37,000	44,000	51,000	57,000	70,000
100,000	21,000	27,000	34,000	40,000	46,000	57,000	65,000	75,000
150,000	23,000	31,000	38,000	44,000	54,000	67,000	75,000	87,000
200,000	24,000	34,000	42,000	46,000	57,000	70,000	80,000	95,000

*Prospective RMS Symmetrical Amperes Short-Circuit Current • Note: Data derived from Peak Let-Thru Curves

Dimensions

AMPERES	FIG. NO.	DIMENSIONS INCHES (mm)												
		A	B	C	D	E	F	G	H	J	K	L	M	N
200-800	1	3 ³ / ₄ (95.3)	5 ³ / ₄ (146.1)	6 ³ / ₄ (171.5)	—	—	8 ³ / ₈ (219.1)	—	—	2 (50.8)	2 ¹ / ₂ (63.5)	3 ¹ / ₈ (9.5)	5 ¹ / ₈ x 1 ¹ / ₈ (15.9) x (28.6)	—
900-1200	2	3 ³ / ₄ (95.3)	5 ³ / ₄ (146.1)	6 ³ / ₄ (171.5)	9 ¹ / ₄ (235.0)	9 ¹ / ₂ (241.3)	10 ³ / ₄ (273.1)	—	—	2 (50.8)	2 ¹ / ₂ (63.5)	3 ¹ / ₈ (9.5)	5 ¹ / ₈ x 3 ¹ / ₄ (15.9) x (19.1)	5 ¹ / ₈ x 1 ¹ / ₈ (15.9) x (28.6)
1300-1600	2	3 ³ / ₄ (95.3)	5 ³ / ₄ (146.1)	6 ³ / ₄ (171.5)	9 ¹ / ₄ (235.0)	9 ¹ / ₂ (241.3)	10 ³ / ₄ (273.1)	—	—	2 ³ / ₄ (60.3)	3 (76.2)	7 ¹ / ₁₆ (11.1)	5 ¹ / ₈ x 3 ¹ / ₄ (15.9) x (19.1)	5 ¹ / ₈ x 1 ¹ / ₈ (15.9) x (28.6)
1800-2000	2	3 ³ / ₄ (95.3)	5 ³ / ₄ (146.1)	6 ³ / ₄ (171.5)	9 ¹ / ₄ (235.0)	9 ¹ / ₂ (241.3)	10 ³ / ₄ (273.1)	—	—	2 ³ / ₄ (69.9)	3 ¹ / ₂ (88.9)	1 ¹ / ₂ (12.7)	5 ¹ / ₈ x 3 ¹ / ₄ (15.9) x (19.1)	5 ¹ / ₈ x 1 ¹ / ₈ (15.9) x (28.6)
2100-2500	3	4 (101.6)	5 ³ / ₄ (146.1)	6 ³ / ₄ (171.5)	9 ¹ / ₄ (235.0)	9 ¹ / ₂ (241.3)	10 ³ / ₄ (273.1)	1 ¹ / ₈ (41.3)	1 ³ / ₄ (44.5)	3 ¹ / ₂ (88.9)	5 (127.0)	3 ¹ / ₄ (19.1)	5 ¹ / ₈ x 3 ¹ / ₄ (15.9) x (19.1)	5 ¹ / ₈ x 1 ¹ / ₈ (15.9) x (28.6)
2501-3000	3	4 (101.6)	5 ³ / ₄ (146.1)	6 ³ / ₄ (171.5)	9 ¹ / ₄ (235.0)	9 ¹ / ₂ (241.3)	10 ³ / ₄ (273.1)	1 ¹ / ₈ (41.3)	1 ³ / ₄ (44.5)	4 (101.6)	5 (127.0)	3 ¹ / ₄ (19.1)	5 ¹ / ₈ x 3 ¹ / ₄ (15.9) x (19.1)	5 ¹ / ₈ x 1 ¹ / ₈ (15.9) x (28.6)
3500-4000	4	4 (101.6)	5 ³ / ₄ (146.1)	6 ³ / ₄ (171.5)	9 ¹ / ₄ (235.0)	9 ¹ / ₂ (241.3)	10 ³ / ₄ (273.1)	1 ³ / ₄ (44.5)	3 ¹ / ₄ (82.6)	4 ³ / ₄ (120.7)	5 ³ / ₄ (146.1)	3 ¹ / ₄ (19.1)	5 ¹ / ₈ x 1 ³ / ₈ (15.9) x (34.9)	5 ¹ / ₈ x 1 ³ / ₈ (15.9) x (34.9)
4500-5000	5	4 (101.6)	5 ³ / ₄ (146.1)	—	9 ¹ / ₄ (235.0)	—	10 ³ / ₄ (273.1)	1 ¹ / ₈ (41.3)	3 ¹ / ₄ (82.6)	5 ¹ / ₄ (133.4)	7 ¹ / ₈ (181.0)	1 (25.4)	5 ¹ / ₈ DIA. (15.9)	—
6000	5	4 (101.6)	5 ³ / ₄ (146.1)	—	9 ¹ / ₄ (235.0)	—	10 ³ / ₄ (273.1)	1 ¹ / ₈ (41.3)	3 ¹ / ₄ (82.6)	5 ¹ / ₄ (133.4)	7 ¹ / ₈ (181.0)	1 (25.4)	5 ¹ / ₈ DIA. (15.9)	—




FIG. 1




FIG. 2




FIG. 3




FIG. 4





FIG. 5



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[KLPC2400X](#) [KLPC1400X](#) [KLPC3500X](#) [KLPC2100X](#) [KLPC2500X](#) [KLPC1500X](#) [KLPC2200X](#) [KLPC1600X](#)
[KLPC5000X](#) [KLPC250.X](#) [KLPC1350X](#) [KLPC350.X](#) [KLPC1800X](#) [KLPC750.X](#) [KLPC1000X](#) [KLPC600.X](#) [KLPC900.X](#)
[KLPC200.X](#) [KLPC300.X](#) [KLPC1100X](#) [KLPC1200X](#) [KLPC400.X](#) [KLPC4000X](#) [KLPC800.X](#) [KLPC6000X](#)
[KLPC450.X](#) [KLPC4500X](#) [KLPC500.X](#) [KLPC2300X](#) [KLPC700.X](#) [KLPC601.X](#) [KLPC1900X](#) [KLPC1300X](#) [KLPC2000X](#)
[KLPC650.X](#) [KLPC3000X](#)