



### 265/266/267 Series, PICO® Very Fast-Acting Fuse (High-Reliability)

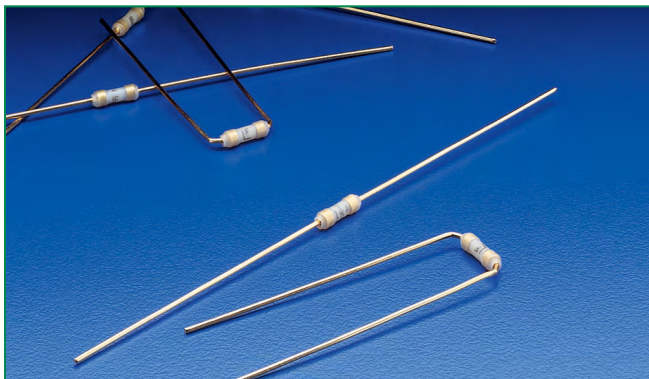

#### Agency Approvals

Agency	Agency File Number	Ampere Range	Series
	29862	0.062 - 10A	265/266
<b>QPL</b>	FM08A	0.062 - 10A	267

#### Description

The 265/266/267 Series are high-reliability PICO® Fuses, that are very fast-acting, with an insulating sleeve. **These fuses provide supplemental protection in end-use equipment to provide protection for components or internal circuits. They are not suitable for branch or feeder circuit use.** The Military version of the 265 Series (except 1/16 ampere rating) is available in FM08A on QPL for MIL-PRF-23419/8. To order, change 265 to 267.


#### Features

- Military grade available
- RoHS compliant
- Available from 0.062A to 15A
- Available in axial and radial leaded
- Available in miniature and subminiature formats


#### Electrical Characteristics

% of Ampere Rating	Ampere Rating	Opening Time
100%	1/16–15	4 Hours, <b>Min.</b>
200%	1/16–7	1 Second, <b>Max.</b>
	10	3 Second, <b>Max.</b>
	15	10 Second, <b>Max.</b>

#### Electrical Characteristics


Ampere Rating (A)	Amp Code	Max Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Agency Approvals	
						<b>QPL</b>
0.062	.062	125	300A@125VDC 50A@125VAC	6.9900	X	X
0.125	.125	125		2.1000	X	X
0.250	.250	125		0.7100	X	X
0.375	.375	125		0.4200	X	X
0.500	.500	125		0.2800	X	X
0.750	.750	125		0.1700	X	X
1.00	.001	125		0.1250	X	X
1.50	.015	125		0.0800	X	X
2.00	.002	125		0.0550	X	X
2.50	.025	125		0.0420	X	X
3.00	.003	125		0.03515	X	X
4.00	.004	125		0.0230	X	X
5.00	.005	125		0.0140	X	X
7.00	.007	125		0.0100	X	X
10.0	.010	125		0.00645	X	X
15.0	.015	32	300A@32VDC 50A@32VAC	0.0040	X	X

## Temperature Re-rating Curve

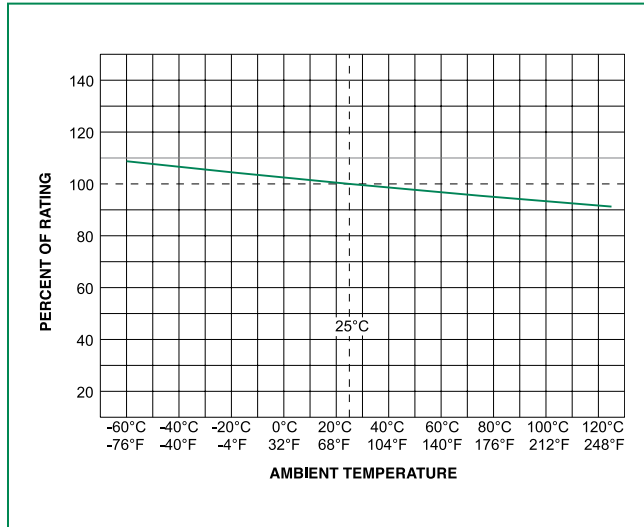


Note:  
Rerating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

## Average Time Current Curves

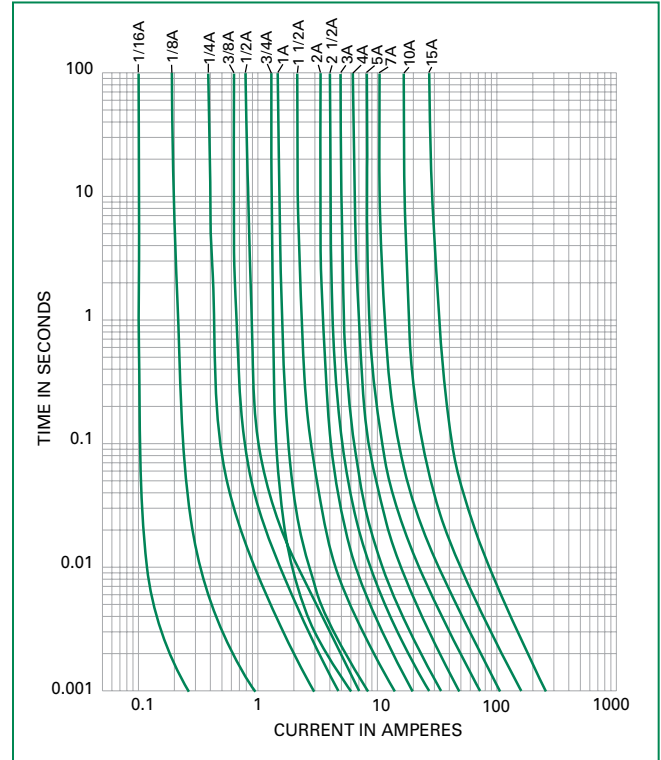

## Soldering Parameters\

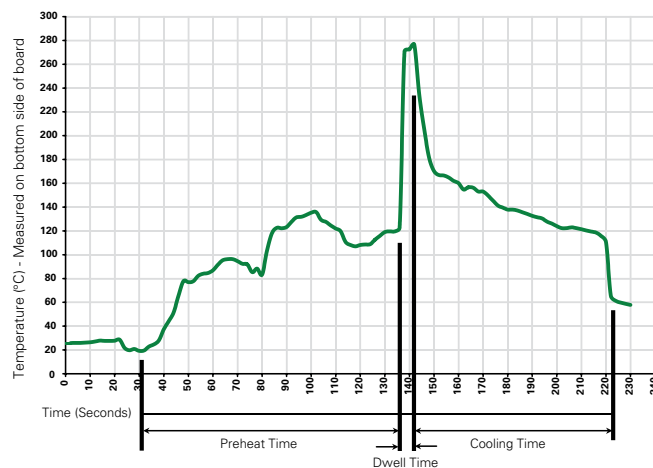

## Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
<b>Preheat:</b> (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100°C
Temperature Maximum:	150°C
Preheat Time:	60-180 seconds
<b>Solder Pot Temperature:</b>	280°C Maximum
<b>Solder Dwell Time:</b>	2-5 seconds

## Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350°C +/- 5°C  
Heating Time: 5 seconds max.


**Note:** These devices are not recommended for IR or Convection Reflow process.

### Product Characteristics

<b>Materials</b>	Body: White Thermoplastic Gold-Plated Copper Leads, Type II
<b>Weight</b>	.32 Grams
<b>Solderability</b>	MIL-STD-202, Method 208
<b>Lead Pull Force</b>	MIL-STD-202, Method 211, Test Condition A (will withstand a 5 lbs. axial pull test) AQL (Electrical Characteristics): Certified to 1 % AQL
<b>Sampling</b>	Per MIL-STD-105, Inspection Level II. Traceability and Identification Records: Controlled by lot number and retained on file for a minimum of three years. Copies of Lot Certification Test data available when requested with order
<b>Options</b>	Special screening tests, burn-in, etc. can be supplied on special order to meet specific requirements. For information on higher current ratings, contact Littelfuse.  267 series fuses are offered with optional solder coated leads. To order, enter XT as the end suffix (see Part Numbering System section)

<b>Operating Temperature</b>	-55°C to +125°C
<b>Shock</b>	MIL-STD-202, Method 213, Test Condition I (100 G's peak for 6 milliseconds).
<b>Vibration</b>	MIL-STD-202, Method 201 (10-55 Hz); MIL-STD-202, Method 204, Test Condition C (55-2000 Hz at 10 G's Peak)
<b>Salt Spray</b>	MIL-STD-202, Method 101, Test Condition B
<b>Seal Test</b>	MIL-STD-202, Method 112, Test Condition A
<b>Insulation Resistance (After Opening)</b>	MIL-STD-202, Method 302, Test Condition A (1/2 Megohm minimum)
<b>Thermal Shock</b>	MIL-STD-202, Method 107, Test Condition B (-65°C to 125°C).
<b>Moisture Resistance</b>	MIL-STD-202, Method 106
<b>Fuses To MIL SPEC</b>	265 Series (except 1/16 ampere rating) is available as FM08A on QPL for MIL-PRF-23419/8. To order, change 265 to 267


### Dimensions

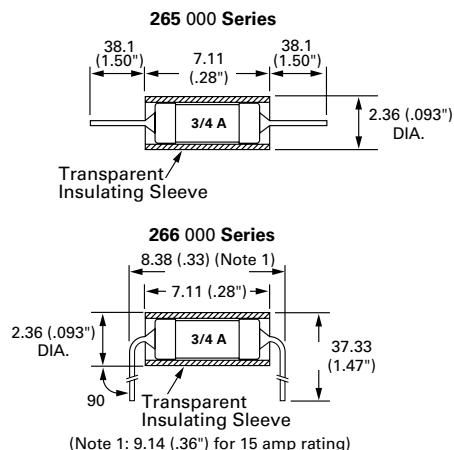

### Packaging

Packaging Option	Quantity	Quantity & Packaging Code
Bulk Pack	5	V

### Part Numbering System

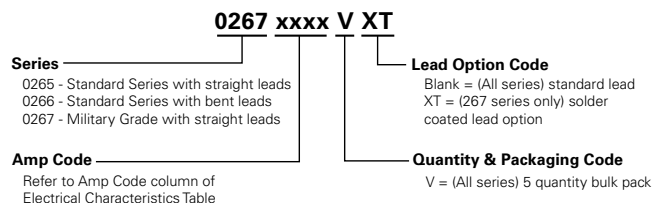

### Additional Information



**Datasheet 265 Series**



**Resources 265 Series**



**Samples 265 Series**



**Datasheet 266 Series**



**Resources 266 Series**



**Samples 266 Series**



**Datasheet 267 Series**



**Resources 267 Series**



**Samples 267 Series**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[0266004VT](#) [0266010V](#) [0266015V](#) [0265.062VT](#) [0266.062VT](#) [026501.5VT](#) [026601.5VT](#) [0266.375VT](#) [0267.375VT](#)  
[0265.375VT](#) [0267015VT](#) [0266007VT](#) [0265.250VT](#) [0267.250VT](#) [0266.250VT](#) [0266003VT](#) [0265.750VT](#) [0267.750VT](#)  
[0266.750VT](#) [0265010VT](#) [0266005VT](#) [0265015VT](#) [0266002VT](#) [0265003V](#) [0265001V](#) [0265005V](#) [0265004V](#)  
[0265004.V](#) [0265010.V](#) [0265015.V](#) [0265005VT](#) [0265001VT](#) [0265003VT](#) [0265007VT](#) [0266.125VT](#) [0267.125VT](#)  
[0265.125VT](#) [0265004VT](#) [0266002V](#) [0266004V](#) [0266005V](#) [0266001V](#) [0266003V](#) [0266007V](#) [0265002VT](#) [0267001V](#)  
[0267005V](#) [0267007V](#) [0267003V](#) [0267004V](#) [0267002V](#) [026602.5VT](#) [026502.5VT](#) [026702.5VT](#) [0266015VT](#)  
[0267002VT](#) [0267004VT](#) [0265.500VT](#) [0267.500VT](#) [0266.500VT](#) [0267015V](#) [0267010V](#) [0267001VT](#) [0266010VT](#)  
[0267005VT](#) [0267007VT](#) [0267003VT](#) [0267010VT](#) [267010](#) [267005](#) [267001](#) [267.250](#) [267007](#) [267015](#) [267002](#)  
[266007](#) [266010](#)