

MG12150S-BN2MM



Agency Approvals

AGENCY	AGENCY FILE NUMBER
	E71639

Features

- High short circuit capability, self limiting short circuit current
- IGBT³ CHIP(Trench+Field Stop technology)
- $V_{CE(sat)}$ with positive temperature coefficient
- Fast switching and short tail current
- Free wheeling diodes with fast and soft reverse recovery
- Low switching losses

Applications

- High frequency switching application
- Medical applications
- Motion/servo control
- UPS systems

Module Characteristics ($T_c = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Unit
$T_{J \max}$	Max. Junction Temperature				150	$^\circ\text{C}$
$T_{J \text{ op}}$	Operating Temperature		-40		125	$^\circ\text{C}$
T_{stg}	Storage Temperature		-40		125	$^\circ\text{C}$
V_{isol}	Insulation Test Voltage	AC, t=1min		3000		V
CTI	Comparative Tracking Index		350			
Torque	Module-to-Sink	Recommended (M6)	3		5	N·m
Torque	Module Electrodes	Recommended (M5)	2.5		5	N·m
Weight				160		g

Absolute Maximum Ratings ($T_c = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameters	Test Conditions	Values	Unit
IGBT				
V_{CES}	Collector - Emitter Voltage	$T_J = 25^\circ\text{C}$	1200	V
V_{GES}	Gate - Emitter Voltage		± 20	V
I_C	DC Collector Current	$T_c = 25^\circ\text{C}$	200	A
		$T_c = 80^\circ\text{C}$	150	A
I_{CM}	Repetitive Peak Collector Current	$t_p = 1\text{ms}$	300	A
P_{tot}	Power Dissipation Per IGBT		625	W
Diode				
V_{RRM}	Repetitive Reverse Voltage	$T_J = 25^\circ\text{C}$	1200	V
$I_{\text{F(AV)}}$	Average Forward Current	$T_c = 25^\circ\text{C}$	200	A
		$T_c = 80^\circ\text{C}$	150	A
I_{FRM}	Repetitive Peak Forward Current	$t_p = 1\text{ms}$	300	A
I^2t		$T_J = 125^\circ\text{C}$, $t = 10\text{ms}$, $V_R = 0\text{V}$	4350	A^2s

Life Support Note:

Not Intended for Use in Life Support or Life Saving Applications

The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

Power Module

1200V 150A IGBT Module

Electrical and Thermal Specifications ($T_c = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameters	Test Conditions		Min	Typ	Max	Unit
IGBT							
V _{GE(th)}	Gate - Emitter Threshold Voltage	V _{CE} =V _{GE} , I _C =6mA		5.0	5.8	6.5	V
V _{CE(sat)}	Collector - Emitter Saturation Voltage	I _C =150A, V _{GE} =15V, T _J =25°C			1.7		V
		I _C =150A, V _{GE} =15V, T _J =125°C			1.9		V
I _{CES}	Collector Leakage Current	V _{CE} =1200V, V _{GE} =0V, T _J =25°C				1	mA
		V _{CE} =1200V, V _{GE} =0V, T _J =125°C				5	mA
I _{GES}	Gate Leakage Current	V _{CE} =0V,V _{GE} =±15V, T _J =125°C		-400		400	nA
R _{Gint}	Integrated Gate Resistor				5		Ω
Q _{ge}	Gate Charge	V _{CC} =600V, I _C =150A , V _{GE} =±15V			1.4		μC
C _{ies}	Input Capacitance	V _{CE} =25V, V _{GE} =0V, f =1MHz			10.5		nF
C _{res}	Reverse Transfer Capacitance				0.4		nF
t _{d(on)}	Turn - on Delay Time	V _{CC} =600V I _C =150A R _G =2.4Ω V _{GE} =±15V Inductive Load	T _J =25°C		260		ns
			T _J =125°C		290		ns
t _r	Rise Time		T _J =25°C		30		ns
			T _J =125°C		50		ns
t _{d(off)}	Turn - off Delay Time		T _J =25°C		420		ns
			T _J =125°C		520		ns
t _f	Fall Time		T _J =25°C		70		ns
			T _J =125°C		90		ns
E _{on}	Turn - on Energy		T _J =25°C		12		mJ
			T _J =125°C		16		mJ
E _{off}	Turn - off Energy		T _J =25°C		11		mJ
			T _J =125°C		14.5		mJ
I _{SC}	Short Circuit Current	t _{psc} ≤10μS , V _{GE} =15V; T _J =125°C,V _{CC} =900V			600		A
R _{thJC}	Junction-to-Case Thermal Resistance (Per IGBT)					0.2	K/W
Diode							
V _F	Forward Voltage	I _F =150A , V _{GE} =0V, T _J =25°C			1.65		V
		I _F =150A , V _{GE} =0V, T _J =125°C			1.65		V
I _{RRM}	Max. Reverse Recovery Current	I _F =150A , V _R =600V di _F /dt=-4000A/μs T _J =125°C			210		A
Q _{rr}	Reverse Recovery Charge				30.0		μC
E _{rec}	Reverse Recovery Energy				13		mJ
R _{thJCD}	Junction-to-Case Thermal Resistance (Per Diode)					0.36	K/W

Figure 1: Typical Output Characteristics

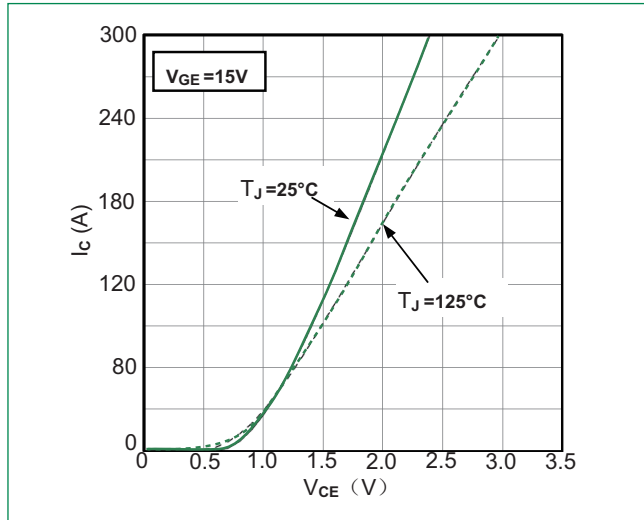


Figure 2: Typical Output characteristics

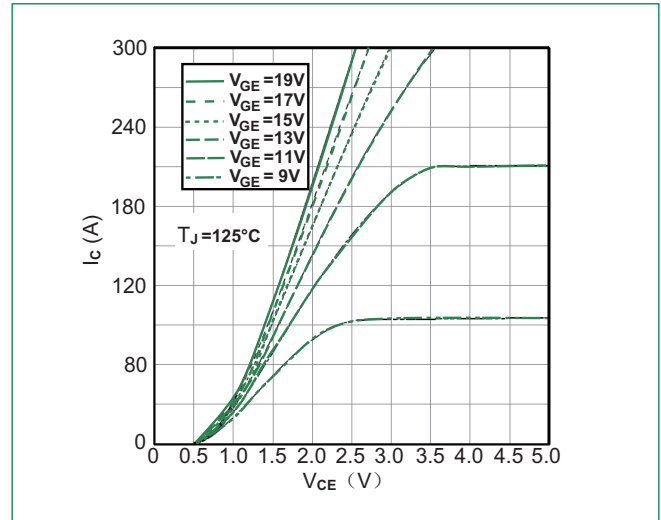


Figure 3: Typical Transfer characteristics

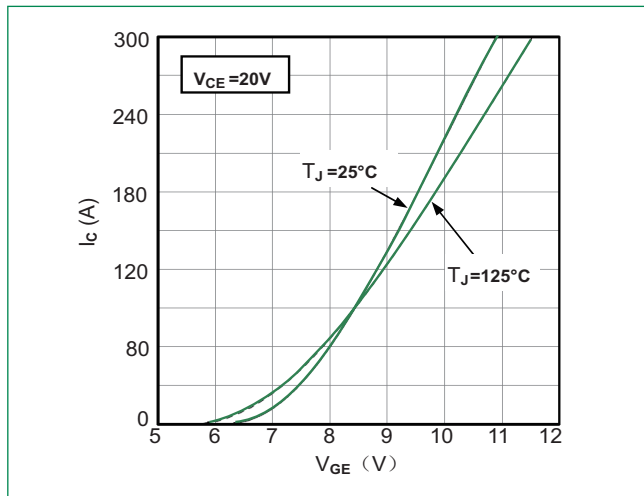


Figure 4: Switching Energy vs. Gate Resistor

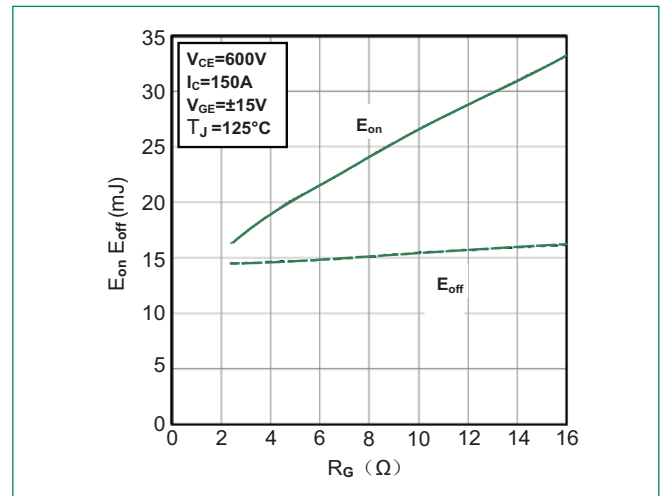


Figure 5: Switching Energy vs. Collector Current

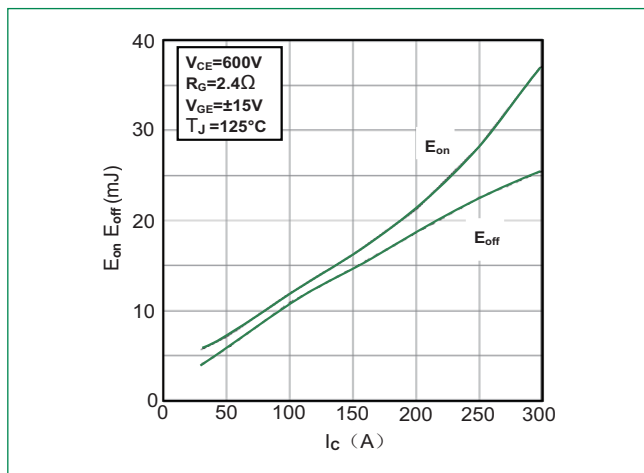


Figure 6: Reverse Biased Safe Operating Area

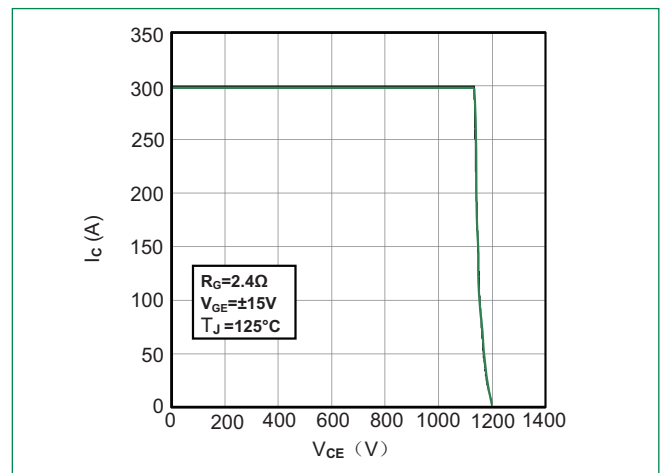


Figure 7: Diode Forward Characteristics

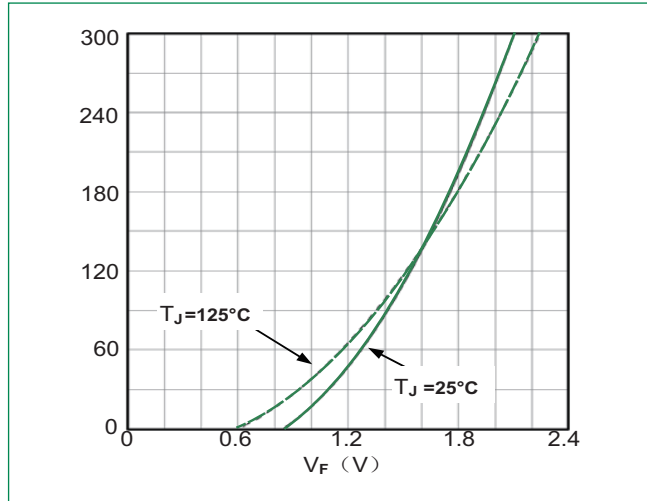


Figure 8: Switching Energy vs. Gate Resistor

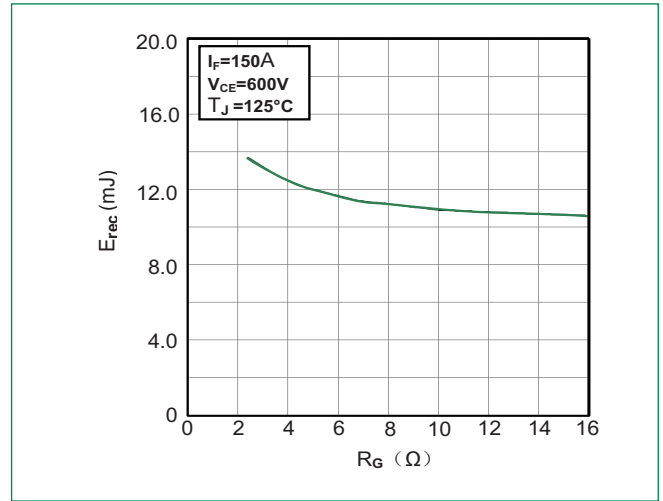


Figure 9: Switching Energy vs. Forward Current



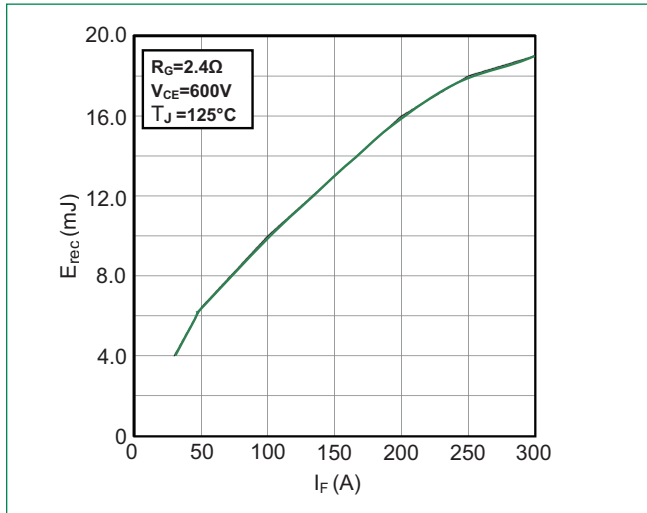



Figure 10: Transient Thermal Impedance

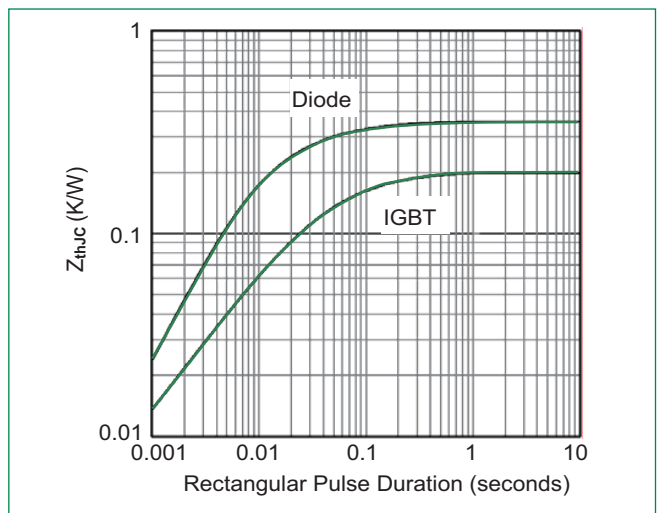

Dimensions-Package S

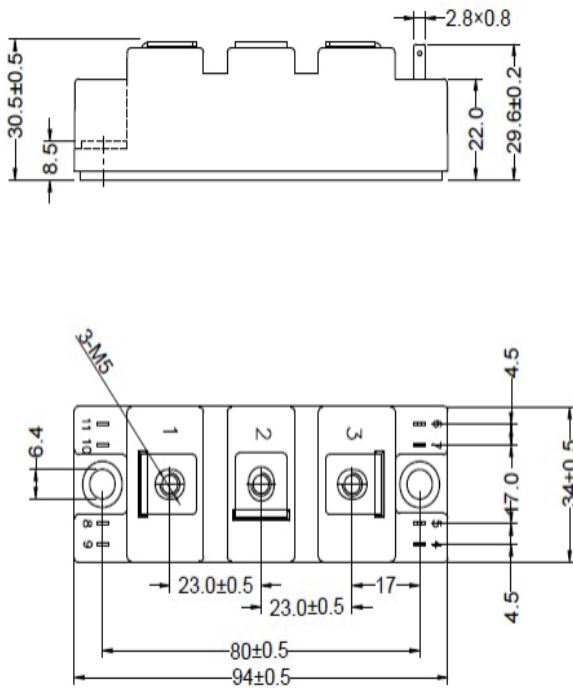


Circuit Diagram

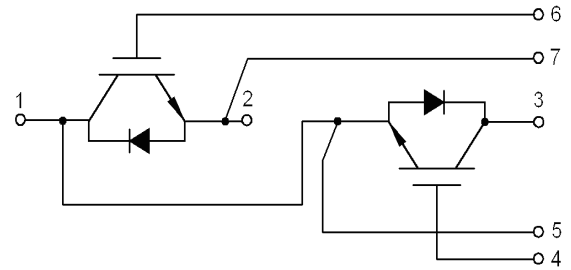


Packing Options

Part Number	Marking	Weight	Packing Mode	M.O.Q
MG12150S-BN2MM	MG12150S-BN2MM	160g	Bulk Pack	100

Part Numbering System

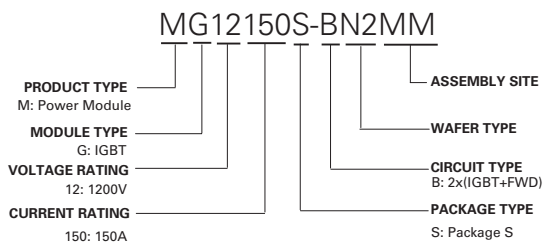

Part Marking System

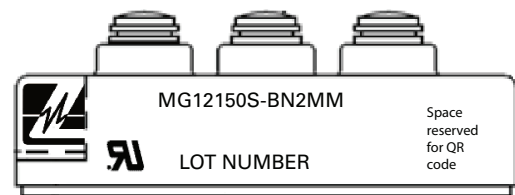

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[MG12150S-BN2MM](#)