

MG12300D-BN2MM Series 300A Dual IGBT



Features

- High short circuit capability, self limiting short circuit current
- IGBT³ CHIP(Trench+Field Stop technology)
- $V_{CE(sat)}$ with positive temperature coefficient
- Fast switching and short tail current
- Free wheeling diodes with fast and soft reverse recovery
- Low switching losses

Applications

- Motor drives
- Inverter
- Converter
- SMPS and UPS
- Welder
- Induction Heating

Agency Approvals

AGENCY	AGENCY FILE NUMBER
	E71639

Module Characteristics ($T_c = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Unit
$T_{J(max)}$	Max. Junction Temperature				150	$^\circ\text{C}$
$T_{J op}$	Operating Temperature		-40		125	$^\circ\text{C}$
T_{stg}	Storage Temperature		-40		125	$^\circ\text{C}$
V_{isol}	Insulation Test Voltage	AC, t=1min		3000		V
CTI	Comparative Tracking Index	Module case exposed to 0.1% ammonium chloride solution per UL and IEC standards	350			V
Torque	Module-to-Sink	Recommended (M6)	3		5	N·m
Torque	Module Electrodes	Recommended (M6)	2.5		5	N·m
Weight				320		g

Absolute Maximum Ratings ($T_c = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameters	Test Conditions	Values	Unit
IGBT				
V_{CES}	Collector - Emitter Voltage	$T_J = 25^\circ\text{C}$	1200	V
V_{GES}	Gate - Emitter Voltage		± 20	V
I_C	DC Collector Current	$T_c = 25^\circ\text{C}$	480	A
		$T_c = 80^\circ\text{C}$	300	A
I_{CM}	Repetitive Peak Collector Current	$t_p = 1\text{ms}$	600	A
P_{tot}	Power Dissipation Per IGBT		1450	W
Diode				
V_{RRM}	Repetitive Reverse Voltage	$T_J = 25^\circ\text{C}$	1200	V
$I_{F(AV)}$	Average Forward Current	$T_c = 25^\circ\text{C}$	480	A
		$T_c = 80^\circ\text{C}$	300	A
I_{FRM}	Repetitive Peak Forward Current	$t_p = 1\text{ms}$	600	A
I^2t		$T_J = 125^\circ\text{C}$, $t = 10\text{ms}$, $V_R = 0\text{V}$	18000	A^2s

Life Support Note:

Not Intended for Use in Life Support or Life Saving Applications

The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

Electrical and Thermal Specifications ($T_c = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameters	Test Conditions		Min	Typ	Max	Unit
IGBT							
V _{GE(th)}	Gate - Emitter Threshold Voltage	V _{CE} =V _{GE} , I _C =12mA		5.0	5.8	6.5	V
V _{CE(sat)}	Collector - Emitter Saturation Voltage	I _C =300A, V _{GE} =15V, T _J =25°C			1.7		V
		I _C =300A, V _{GE} =15V, T _J =125°C			1.9		V
I _{CES}	Collector Leakage Current	V _{CE} =1200V, V _{GE} =0V, T _J =25°C				1	mA
		V _{CE} =1200V, V _{GE} =0V, T _J =125°C				5	mA
I _{GES}	Gate Leakage Current	V _{CE} =0V, V _{GE} =±15V, T _J =125°C		-400		400	μA
R _{Gint}	Intergrated Gate Resistor				2.5		Ω
Q _{ge}	Gate Charge	V _{CE} =600V, I _C =300A , V _{GE} =±15V			2.8		μC
C _{ies}	Input Capacitance	V _{CE} =25V, V _{GE} =0V, f =1MHz			21		nF
C _{res}	Reverse Transfer Capacitance				0.85		nF
t _{d(on)}	Turn - on Delay Time	V _{CC} =600V I _C =300A R _G =2.4Ω V _{GE} =±15V Inductive Load	T _J =25°C		160		ns
			T _J =125°C		170		ns
t _r	Rise Time		T _J =25°C		40		ns
			T _J =125°C		45		ns
t _{d(off)}	Turn - off Delay Time		T _J =25°C		450		ns
			T _J =125°C		520		ns
t _f	Fall Time		T _J =25°C		100		ns
			T _J =125°C		160		ns
E _{on}	Turn - on Energy		T _J =25°C		16.5		mJ
			T _J =125°C		25		mJ
E _{off}	Turn - off Energy		T _J =25°C		24.5		mJ
			T _J =125°C		37		mJ
I _{SC}	Short Circuit Current	t _{pSC} ≤10μS , V _{GE} =15V			1200		A
		T _J =125°C, V _{CC} =900V					
R _{thJC}	Junction-to-Case Thermal Resistance (Per IGBT)					0.085	K/W
Diode							
V _F	Forward Voltage	I _F =300A , V _{GE} =0V, T _J =25°C			1.65		V
		I _F =300A , V _{GE} =0V, T _J =125°C			1.65		V
I _{RRM}	Max. Reverse Recovery Current	I _F =300A , V _R =600V d _{IF} /dt=-6000A/μs T _J =125°C			270		A
Q _{rr}	Reverse Recovery Charge				56		μC
E _{rec}	Reverse Recovery Energy				26		mJ
R _{thJCD}	Junction-to-Case Thermal Resistance (Per Diode)				0.15		K/W

Figure 1: Typical Output Characteristics

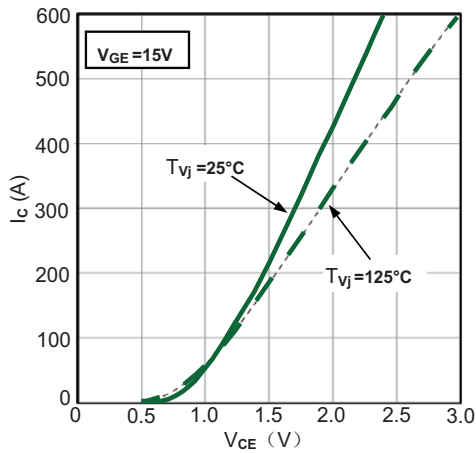


Figure 2: Typical Output Characteristics

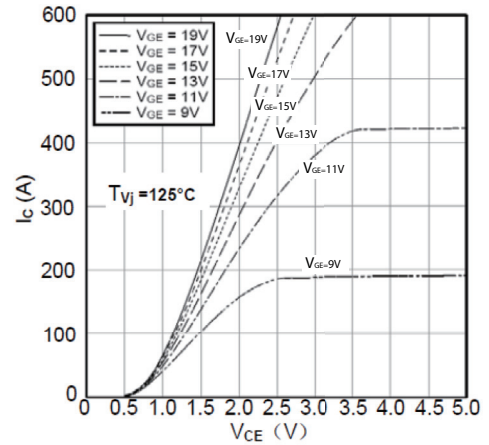


Figure 3: Typical Transfer characteristics

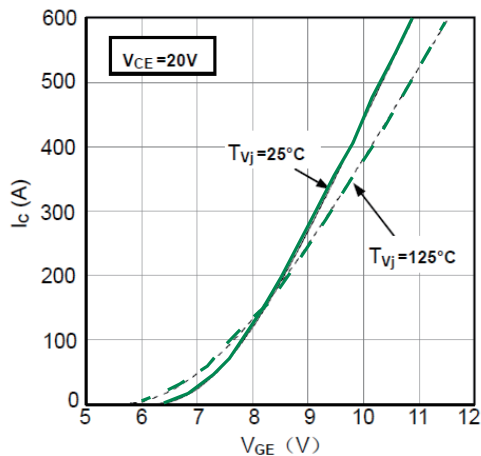


Figure 4: Switching Energy vs. Gate Resistor

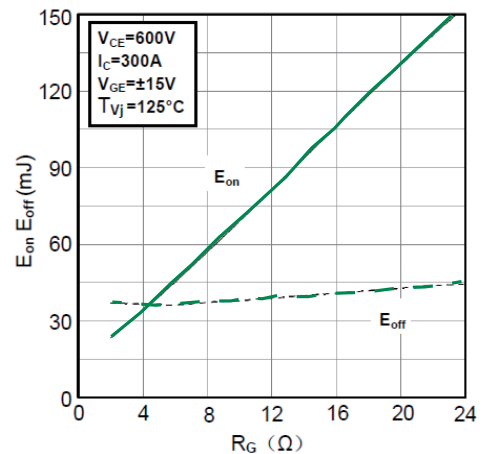


Figure 5: Switching Energy vs. Collector Current

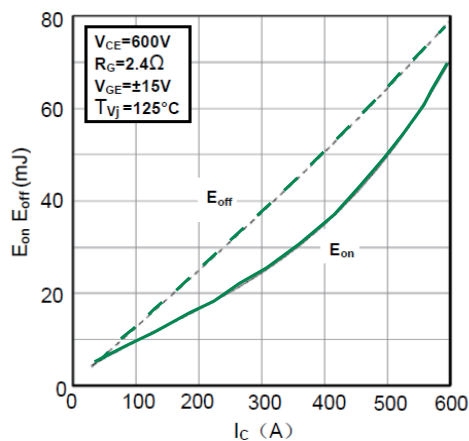


Figure 6: Reverse Biased Safe Operating Area

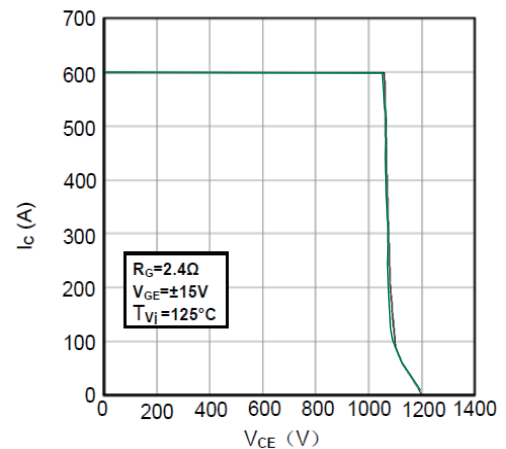


Figure 7: Diode Forward Characteristics

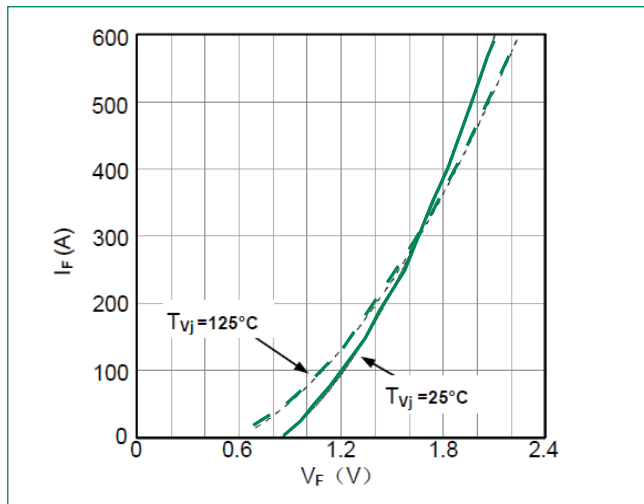


Figure 8: Switching Energy vs. Gate Resistort

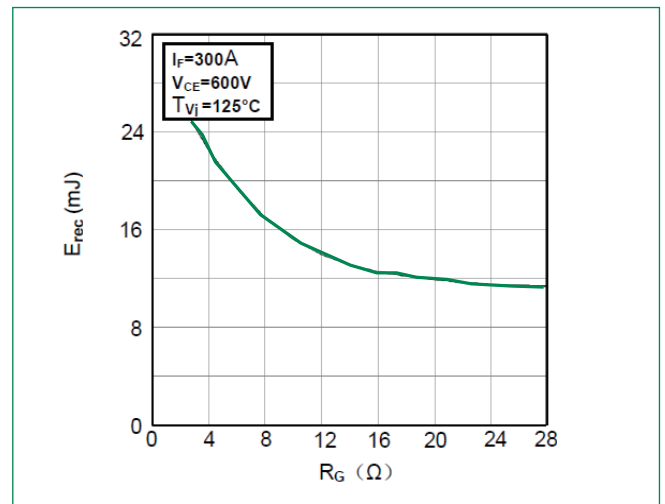


Figure 9: Switching Energy vs. Forward Current



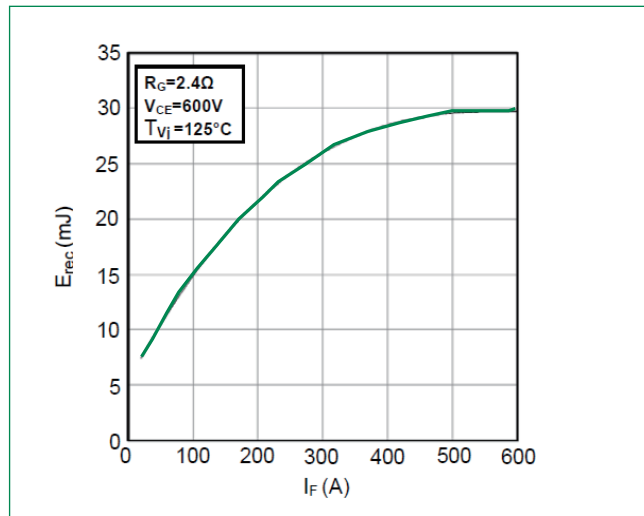




Figure 10: Transient Thermal Impedance

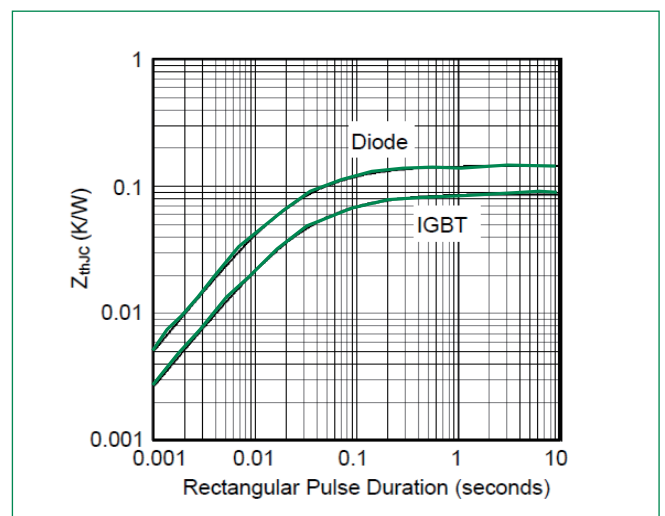

Dimensions-Package D

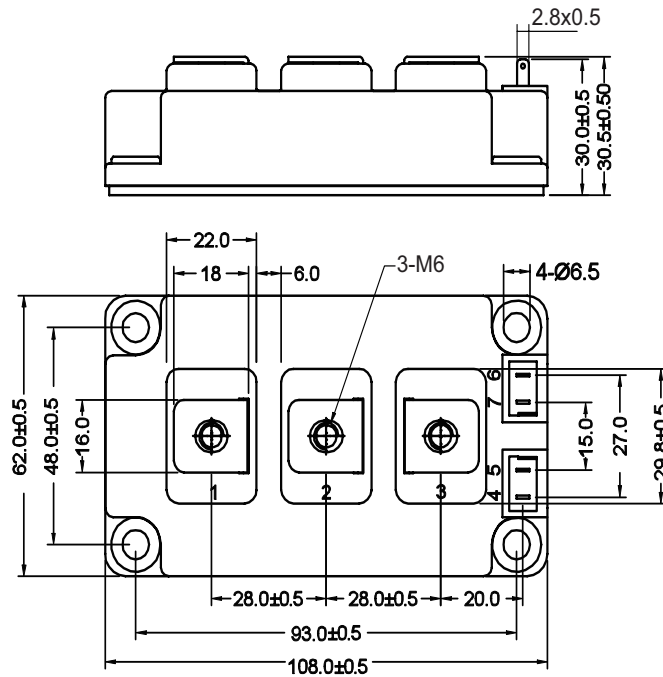


Circuit Diagram and Pin Assignment

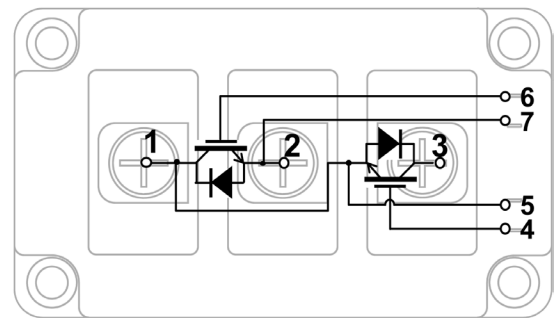


Packing Options

Part Number	Marking	Weight	Packing Mode	M.O.Q
MG12300D-BN2MM	MG12300D-BN2MM	320g	Bulk Pack	60

Part Numbering System

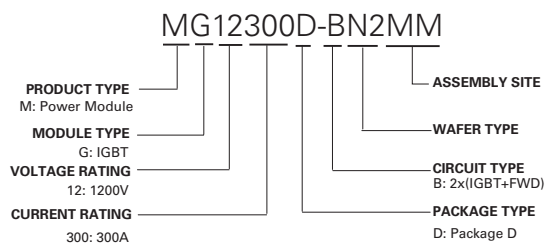

Part Marking System

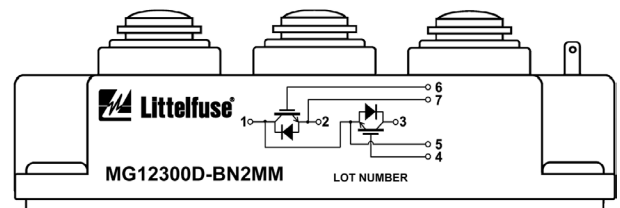

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[MG12300D-BN2MM](#)