
UNCONTROLLED DOCUMENT

PART NUMBER	LCD-S3X1C50TR/A	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
02.07.07	E.C.N. #11148.		Α
03.08.11	E.C.N. #10BRDR. & REDRAWN.		В

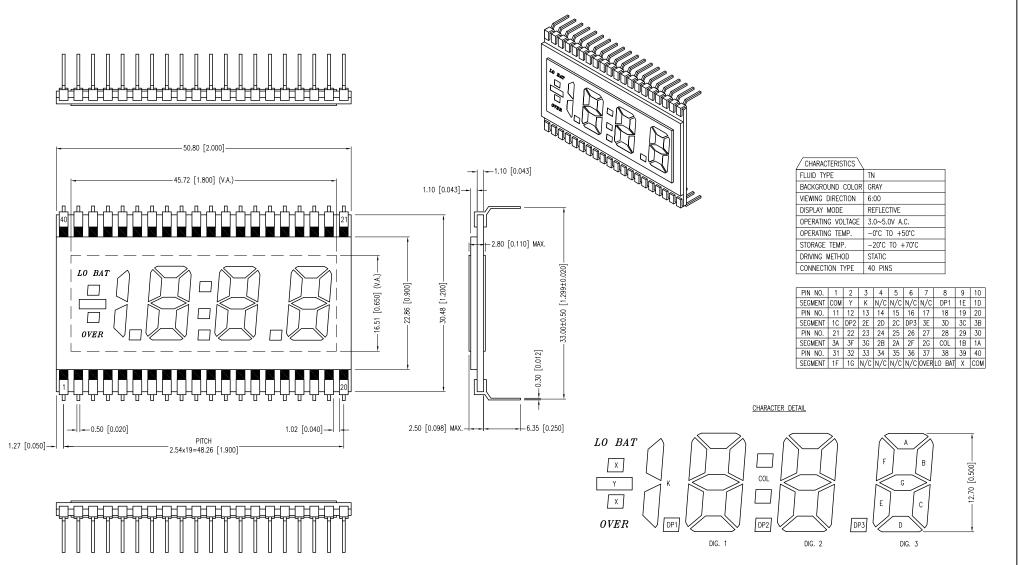

Creating LED and LCD Solutions Together

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

WEB: WWW.LUMEX.COM

0.50" CHARACTER HIEGHT, 3 1/2 DIGIT LCD GLASS, TN, REFLECTIVE, 40 PINS.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.003). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.001), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.001), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.001), X.XX=±0.05 (±0.001 UNCONTROLLED DOCUMENT DATE: 11.19.98 DRAWN BY: JC PAGE: OF CHKD BY: \_\_\_ APRVD BY: SCALE: NTS YΑ UNIT: mm [INCH] (Pb)

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

LCD-S3X1C50TR/A-D