



UNCONTROLLED DOCUMENT

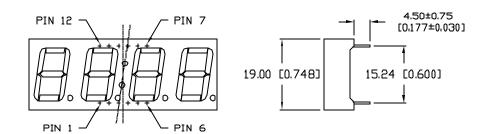

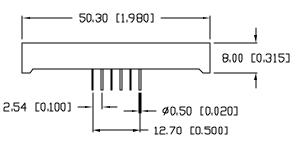

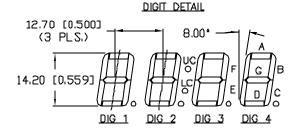

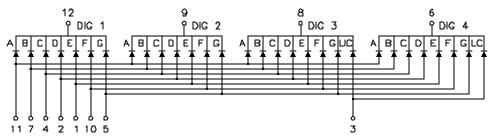

PART NUMBER

LDC-N5612NI

E.C.N. NUMBER AND REVISION COMMENTS DATE E.C.N. #11148. 5.10.07

REPLACE PART #LDQ-N522RI

ELECTRO-OPTICAL CHARACTERISTICS TA = 25°C If = 10mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH FORWARD VOLTAGE REVERSE VOLTAGE AXIAL INITED EMITTED COLOR: FONT COLOR: SEGMENT COLOR:	5.0 GREEN GREY	565 (GREEN 2.2 3900 HITE DIFFUS	2.6	nm Vr Vr Jucd	ار 100µA اγ=10mA

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT* STEADY CURRENT POWER DISSIPATION DERATE FROM 25°C OPERATING, STORAGE TEMP. SOLDERING TEMP. 2.0mm FROM BODY	160 25 105 -1.2 -40 TO +85 +260	mA mA mW mW/^c °C °C 3 SEG. MAX

* t<10µS

REV.



REV.

*UNIESS OTHERWISE SPECFED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD 97ZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). NN= +0ECIMAL PRECISION MAX.= +0.00 (±0.000), XXXX=±0.127 (±0.005).

REV. PART NUMBER LDC-N5612NI

> 0.56" QUAD DIGIT CLOCK DISPLAY, 565nm GREEN, COMMON CATHODE, GREY FONT/WHITE SEGMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUNEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



JC

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY:

APPROVED BY: 3.30.98 DATE: PAGE:

1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

LDC-N5612NI