

UNCONTROLLED DOCUMENT


PIN 12 -


PIN 1

PART NUMBER LDQ-M3604RI REV.



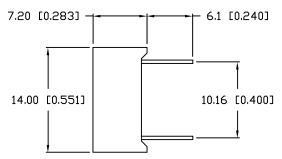

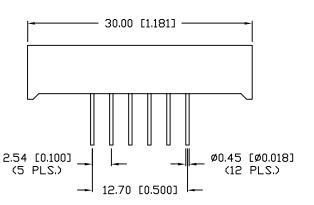




12	9 COMMON ANOD	E 8	6
ຶ∣ DIG 1	DIG 2	DIG 3	DIG 4
A B C D E F G DP1 A B	C D E F G DP2 A B		A B C D E F G DP4
11 7 4 2 1 10 5 3			

DADAMETED MIN TVD MAY UNITE TEST COND	LECTRU-UPTICAL	L CHARACTE	RISTICS TA=2	25°C	If=10mA	
PARAMETER MIN THE MAX UNITS TEST COND	PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH 635 nm	EAK WAVELENGTH	ſH	635		nm	
FORWARD VOLTAGE 2.0 2.5 V _f	ORWARD VOLTAGI	Œ	2.0	2.5	V_{f}	
REVERSE VOLTAGE 5.0 V _r I _r =100µA	REVERSE VOLTAGE	E 5.0			V_r	Ir=100µA
AXIAL INTENSITY 2000 µcd I _f =10mA	XIAL INTENSITY		2000		μcd	$I_f = 10mA$
EMITTED COLOR: RED	MITTED COLOR:	RED				
FACE COLOR: GRAY	ACE COLOR:	GRAY				
SEGMENT COLOR: MILKY WHITE DIFFUSED	EGMENT COLOR:	: MILKY	WHITE DIFFU	JSED		

LIMITS OF SAFE OPERATION AT 25°C	PER SEGMENT	
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 30 TO +85	•C
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

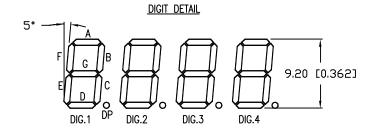

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.000

REV.

PART NUMBER LDQ-M3604RI

0.36" QUAD DIGIT, SEVEN SEGMENT, LED DISPLAY, 635nm RED CHIPS, GRAY FACE WITH WHITE SEGMENTS, COMMON ANODE, 12 PINS, MULTIPLEXED.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC.. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE:

8.1.03 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Lumex</u>:

LDQ-M3604RI