


LDS-A302LI

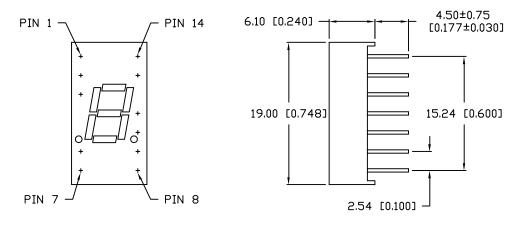


ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=10mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE *		2.2	2.6	V_{f}	
REVERSE VOLTAGE	5.0			V_{r}	I _r =100μΑ
AXIAL INTENSITY		2500		μcd	$I_f = 10mA$
EMITTED COLOR:	GREEN				
FACE COLOR:	GRAY				
SEGMENT COLOR:	MILKY	WHITE DIFFUSE)		





DIGIT DETAIL



COMMON ANODE NOTE: NO PIN 4,5,12 NO CONNECTION: PIN 9

LIMITS OF SAFE OPERATION AT 25°C PER DIE

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.6	mW/*C
OPERATING, STORAGE TEMP.	-40 TO +85	·C
SOLDERING TEMP.	+ 260	. C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000), X.XX=±0.127 (±0.000). LEAD SIZE=±0.05 (±0.000), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000), X.XX=±0.127 (±0.000). LEAD SIZE=±0.05 (±0.000), X.XX=±0.127 (±0.000). LEAD LENGTH=±0.75 (±0.000). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000). LEAD LENGTH=±0.75 (±0.000). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000). LEAD LENGTH=±0.75 (±0.000). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000). LEAD LENGTH=±0.75 (±0.000). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000). MI

REV. PART NUMBER LDS-A302L

0.30" SINGLE DIGIT, SEVEN SEGMENT DISPLAY, 565 nm GREEN CHIPS, GRAY FAC WITH WHITE SEGMENTS.

CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF

LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE: 10.23.07 PAGE: 1 OF 1 SCALE: N/A

JN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: