
## UNCONTROLLED DOCUMENT

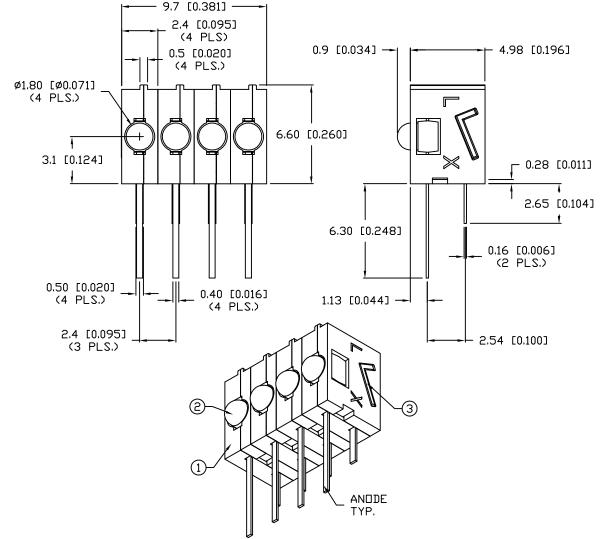

PART NUMBER

SSF-LXH555GD-4

A DATE

REV.

REV. E.C.N. NUMBER AND REVISION COMMENTS DATE

A E.C.N. #10BRDR. & REDRAWN. 1.25.01

ELECTRO-OPTICAL CH	HARACTERI	STICS TA=25°C		$I_f = 20mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		2.1	2.8	$v_f$	
REVERSE VOLTAGE	5.0			$v_r$	I <sub>r</sub> =100µA
AXIAL INTENSITY		8		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		50		2x theta	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN	DIFFUSED			

## LIMITS OF SAFE OPERATION AT 25°C PER LED

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	<b>.</b> C
SOLDERING TEMP.	+ 260	<b>.</b> C
2.0mm FROM BODY		3 SEC. MAX

<sup>\*</sup> t<10µS

## NOTES:

- 1. SSH-LXH555 HOLDER, BLACK NYLON. (4 PCS.)
- 2. SSL-LXA227GD LED. (4 PCS.)
- 3. SSH-LXH555-SQR.

DRAWN BY:

CT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN==+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= ±0.00 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), X.XX=±0.05 (±0.000),

REV. A

PART NUMBER
SSF-LXH555GD-4

T-1.8mm QUAD RIGHT ANGLE FAULT INDICATOR, 565nm GREEN LEDS, GREEN DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

<u>RELIABILITY NOTE</u>

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



| 290 E. HELEN ROAD | PALATINE, IL 60067-6976 | PHONE: +1.847.359.2790

Α

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

CHECKED BY: APPROVED BY: DATE: 6.4.98
PAGE: 1 OF 1
SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSF-LXH555GD-4