
## UNCONTROLLED DOCUMENT

PART NUMBER
SSL-LX305F4SYC

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E,C,N, #10BRDR, & REDRAWN IN 3D,	4.17.01

ø3.00	[ø0.118]	¬_
		(+)

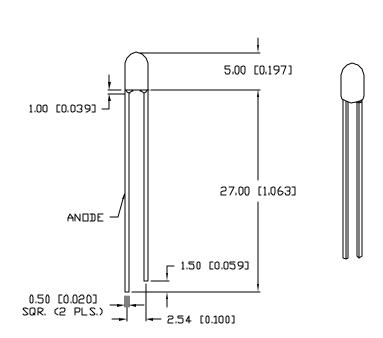

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA						
PARAMETER	MIN	ΤΥP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		590		nm		
FORWARD VOLTAGE		2.1	2.5	$V_{f}$		
REVERSE VOLTAGE	5.0			٧r	Ir=100µA	
AXIAL INTENSITY		750		mcd	$I_f = 20mA$	
VIEWING ANGLE		.30		2x theta		
EMITTED COLOR:	YELLOW					
EPOXY LENS FINISH:	WATER CL	EAR				

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	125	mW
DERATE FROM 25°C	— 1.Б	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	<b>'</b> C
SOLDERING TEMP.	+ 260	<b>'</b> C
2.0mm FROM BODY		3 SEG. MAX
* 1.40 C		

\* t<10μS

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.000), NIN= +0.000 NIN

A SSL-LX305F4SYC

T—3mm (T—1) 590nm SUPER YELLOW LED,
WATER CLEAR LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE EXCEPT OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISOLOGISHER AND DISSEMNATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067–6976 PHONE: +1.847.359.2790 US WFB: www.lumex.com

US WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.25.98
PAGE: 1 OF 1
BC SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX305F4SYC