


UNCONTROLLED DOCUMENT

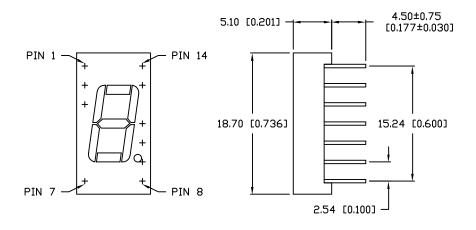

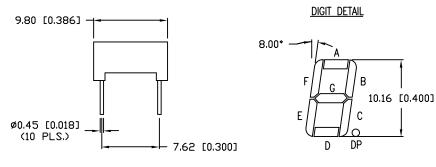



PART NUMBER LDS-A404RI

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10387 & #10BRDR. & REDRAWN.	8-14-98

ELECTRO-OPTICAL	CHARACTER	STICS TA=25	5°C	$I_{f}=10mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635 (RED)		nm	
FORWARD VOLTAGE		2.0	2.5	V_{f}	
REVERSE VOLTAGE	5.0			V_r	I _r =100μΑ
AXIAL INTENSITY		5600		μcd	$I_f = 10mA$
EMITTED COLOR:	RED				
FACE COLOR:	GRAY				
SEGMENT COLOR: MILKY WHITE DIFFUSED					

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	*C
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

PART NUMBER

A LDS-A404RI

0.4" SINGLE DIGIT SEVEN SEGMENT DISPLAY, 635nm RED,

GRAY FACE, WHITE SEGMENTS, COMMON ANODE.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF
LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX
INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION
CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR
IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE
THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE
FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX INCORPORATED 290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 10-8-96
PAGE: 1 OF 1
BC SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: LDS-A404RI