

### UNCONTROLLED DOCUMENT

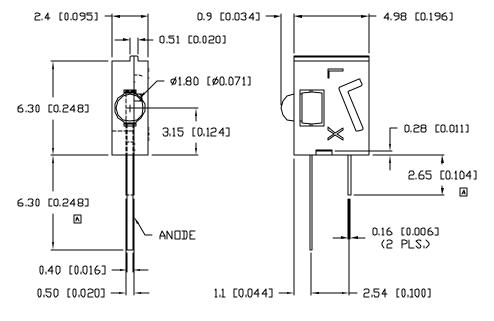



# PART NUMBER SSF-LXH555GD-5V

 REV.
 E.C.N. NUMBER AND REVISION COMMENTS
 DATE

 A
 E.C.N. #10217.
 7.30.96

 B
 E.C.N. #10BRDR. AND REDRAWN.
 1.25.01

REV.

ELECTRO-OPTICAL CH	ARACTERISTICS	TA=25°C	$V_f = 5$	5 V	
PARAMETER	MIN	ΤΥP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		5.0	7.0	$v_f$	
REVERSE VOLTAGE	5.0			٧ <sub>٢</sub>	Aىر001=1ا
AXIAL INTENSITY		8		mcd	$V_f = 5 V$
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN DIFFU	ISED			

#### LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	12	mA
POWER DISSIPATION	310	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	<b>'</b> C
SOLDERING TEMP.	+ 260	<b>'</b> C
2.0mm FROM BODY		3 SEC. MAX

<sup>\*</sup> t<10µS

#### NOTES:

- 1. SSH-LXH555 HOLDER, BLACK NYLON.
- 2. SSL-LXA227GD-5V LED.

REV. PART NUMBER
A SSF-LXH555GD-5V

T-1.8mm SINGLE RIGHT ANGLE INDICATOR,
GREEN DIFFUSED.

Confidential information

The information contained in this document is the property of lumex ing. Except as specifically authorazed in winting by lumex ing. The holder of this document shall keep all information contained herein confidential and shall project same in whole or in part from discussible and dissemnation to all third parties.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SUDDETING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 3.3.96
PAGE: 1 OF 1
ct SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSF-LXH555GD-5V