
## UNCONTROLLED DOCUMENT


PART NUMBER

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR, & REDRAWN IN 3D.	5.15.02

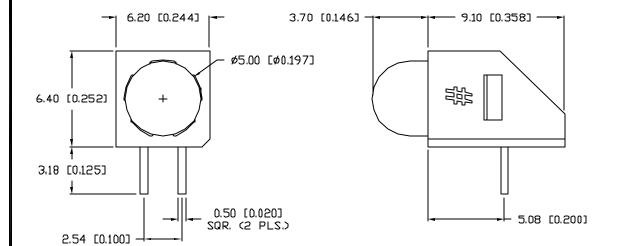

ELECTRO-OPTICAL CHARACT	)mA							
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND			
PEAK WAVELENGTH	700 (RED)		nm					
		565 (GREEN	)	nm				
FORWARD VOLTAGE (R/G)		2.0/2.2	2.5/2.6	۷f				
REVERSE VOLTAGE	5.0			٧r	Ir=100µA			
AXIAL INTENSITY (R/G)		4/20		mcd	If = 20mA			
VIEWING ANGLE		60		2x theta				
EMITTED COLOR: RED/GREEN								
EPOXY LENS FINISH: MILKY WHITE DIFFUSED								
		·	·					

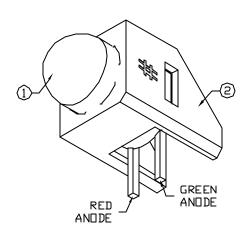

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT		150	mΑ
STEADY CURRENT		25	mΑ
POWER DISSIPATION	(R/G)	120/105	mW
DERATE FROM 25°C	` ' '	-1.2	mW/°C
OPERATING, STORAGE TEM	Р.	-55 TO +100	ŤĊ
SOLDERING TEMP.		+ 260	<b>°</b> C
2.0mm FROM BODY			3 SEC. MAX

<sup>\*</sup> t<10µS

## NOTES:

- SSL-LX5093HGW, RED/GREEN LED.
- 2. SSH-LXH104, BLACK HOLDER.

\*UNLESS OTHERWISE SPECFED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0,039), X,X=±0.5 (±0,020), X,XX=±0.25 (±0,010), X,XX=±0.127 (

REV.

PART NUMBER SSF-LXH104HGW

T-5mm (T-1 3/4) LED, REAR LOADING PCB INDICATOR, RED/GREEN BICOLOR LED, MILKY WHITE DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUNEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY: DATE: 5.16.00 PAGE: 1 OF 1

BC

SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSF-LXH104HGW