
UNCONTROLLED DOCUMENT

PART NUMBER	
SSL-LX4064	Y D

| REV. | A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR. & REDRAWN IN 3D.	4.18.01

Ø4.60 [Ø0.181] — Ø4.00 [Ø0.157]

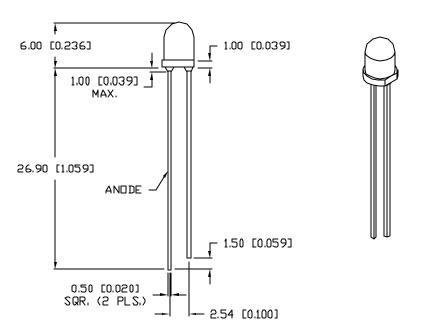

ELECTRO-OPTICAL CH	ARACTERIS	STICS TA=25	5°C	If=20mA	
PARAMETER	MIN	TYP	MAX	LINITS	TEST COND
PEAK WAVELENGTH		585		nm	
FORWARD VOLTAGE		2.1	2.5	V_{f}	
REVERSE VOLTAGE	5.0			V_r	I _r =100μΑ
AXIAL INTENSITY		30		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	YELLOW	DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO +85	' C
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX
¥ 1 <10C		

* t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.0305). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MN= +0.000 MAX.= +0.000 MAX.=

A SSL-LX4064YD

T—4mm 585nm YELLOW LED, YELLOW DIFFUSED LENS,

CONTIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEN NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEN INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONTIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DESCLOSURE AND DISSEMBATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067–6976 PHONE: +1.847.359.2790 US WFB: www.lumex.com

US WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 3.16.98
PAGE: 1 OF 1
BC SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Lumex</u>:

SSL-LX4064YD