
PART NUMBER	SSL-LX3044SYC	REV.	D		
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.		
11.28.94	UPDATED SPECS.				
07.08.96	E.C.N. #10204.		В		
04.10.01	E.C.N. #10BRDR. & REDRAWN IIN 3D.		C		
04.10.13	E.C.N. #10BRDR. & REDRAWN.		D		

Α



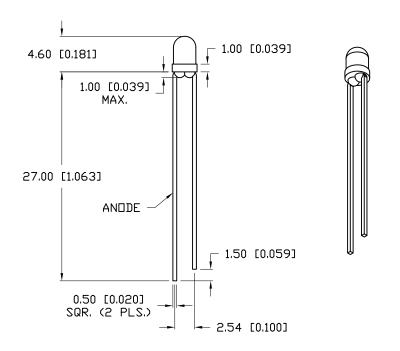

ELECTRO-OPTICAL CH	ARACTERIST	C	$I_f = 20mA$		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		590		nm	
FORWARD VOLTAGE		2.1	2.5	۷f	
REVERSE VOLTAGE	5.0			v_r	Ir=100µA
AXIAL INTENSITY		1000		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		30		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	WATER CL	.EAR			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.6	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	°C
SOLDERING TEMP.	+ 260	. C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION ARX. = +0.00 (±0.000) + 0.000



425 N. GARY AVE. CAROL STREAM, IL 60188-4900 PHONE: +1.800.278.5666 FAX: +1.630.315.2152 WEB: WWW.LUMEX.COM MEMBER OF *ITW* PHOTONICS GROUP

T-3mm	(T-1)	590nm	SUPER	YELLOW	LED,	WATER	CLEAR	LENS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFORMIAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 04.10.13	DRAWN BY: MA
PAGE: 1 OF 1	CHKD BY: DT
SCALE: NTS	APRVD BY: DT
UNIT: mm [INCH]	(49)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX3044SYC