
UNCONTROLLED DOCUMENT

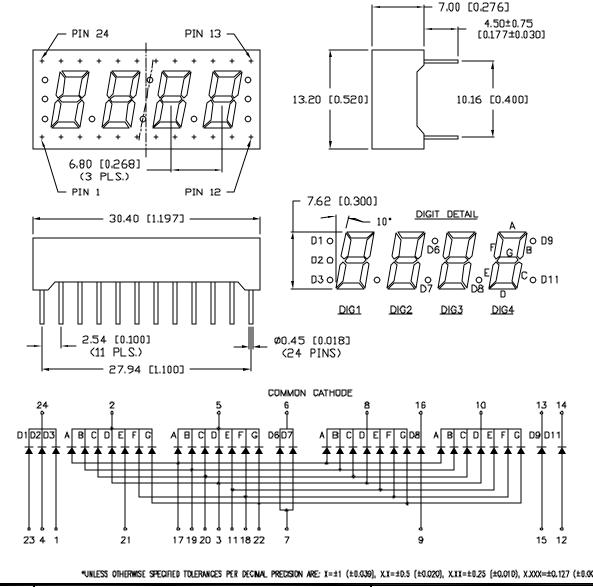

PART NUMBER			REV.
LDC-N3014RI			
REV.	E.C.N. NUMBER AND REVISION COMME	NTS DA	TE
А	E.C.N. #11148.	5.11	.07

REPLACES PART / LDQ-N314RI REPLACES PART / LDQ-N3014RI

ELECTRO-OPTICAL CHARACTERISTICS $T_A = 25^{\circ}C$ $I_T = 10 \text{ mA}$

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH FORWARD VOLTAGE REVERSE VOLTAGE AXIAL INTENSITY EMITTED COLOR; FONT COLOR; SEGMENT COLOR;	5.0 RED GREY MILKY	635 (RED) 2.0 3500 WHITE DIFFUSED	2.5	nm Vr Vr µed	Ir=100µА If=10mA

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT* STEADY CURRENT POWER DISSIPATION DERATE FROM 25°C OPERATING, STORAGE TEMP. SOLDERING TEMP. 2.0mm FROM BODY	150 30 1D5 -1.2 -30 TO +85 +260	mA mA mW mW/C C C 3 SEC. MAX

* t<10µS



0.30" QUAD DIGIT, SEVEN SEGMENT, CLOCK DISPLAY, 635nm RED, MULTIPLEXED, COMMON CATHODE, GREY FONT/WHITE SEGMENTS.

REV.

А

Reliability note Our many years of experience data accumulation indicate that solder heat is a major cause of early and future failure. Please pay attention to your soldering process.

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 5.11.98 PAGE: 1 OF 1		PHC US	DNE: +1.847.359.2790 WEB: www.lumex.com WEB: www.lumex.com.tw		
JL JL JL JLALL. N/A	DRAWN BY:	CHECKED BY:			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: LDC-N3014RI