


UNCONTROLLED DOCUMENT

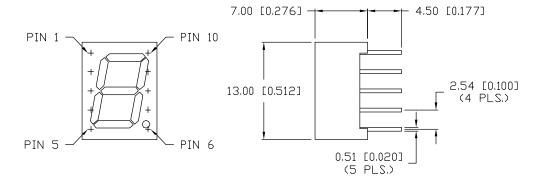

| 10.00 [0.394] | 6.30 [0.248] |
|---|---------------------|
| | A B B |
| 0.30 [0.012] (2 PLS.) - 7.62 [0.300] | 9.90 [0.390] G C DP |





PART NUMBER LDS-C3905RI

E.C.N. NUMBER AND REVISION COMMENTS DATE 3.23.03 E.C.N. #10BRDR. & REDRAWN IN 3D.

REV.

| ELECTRO-OPTICAL CH | HARACTERIS | TICS TA=25 | 5 ' C | $I_f = 10mA$ | |
|--------------------|------------|------------|--------------|--------------|-----------------------|
| PARAMETER | MIN | TYP | MAX | UNITS | TEST COND |
| PEAK WAVELENGTH | | 700 | | nm | |
| FORWARD VOLTAGE | | 2.0 | 2.5 | ۷f | |
| REVERSE VOLTAGE | 5.0 | | | V_r | 1 _r =100µA |
| AXIAL INTENSITY | | 500 | | μcd | $I_f = 10 \text{mA}$ |
| EMITTED COLOR: | RED | | | | |
| FACE COLOR: | GRAY | | | | |
| SEGMENT COLOR: | MII KY W | HITE DIFFU | SED | | |

LIMITS OF SAFE OPERATION AT 25°C PER DIE

| PARAMETER | MAX | UNITS |
|--------------------------|--------------|------------|
| PFAK FORWARD CURRENT* | 150 | mA |
| STEADY CURRENT | 30 | mA |
| POWER DISSIPATION | 105 | mW |
| DERATE FROM 25°C | -1.2 | mW/°C |
| OPERATING, STORAGE TEMP. | - 40 TO + 85 | °C |
| SOLDERING TEMP. | + 260 | *C |
| 2.0mm FROM BODY | | 3 SEC. MAX |

* t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= +DECIMAL PRECISION MAX.= +0.00

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), MIN=+DECIMAL PRECISION MAX.= +0.000

REV.

PART NUMBER _DS-C3905RI

0.39" SEVEN SEGMENT, LED DISPLAY, COMMON CATHODE, 700nm RED CHIPS, GRAY FACE WITH WHITE SEGMENTS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY:

APPROVED BY: DATE:

1.25.99 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Lumex</u>:

LDS-C3905RI