
UNCONTROLLED	DOCUMENT

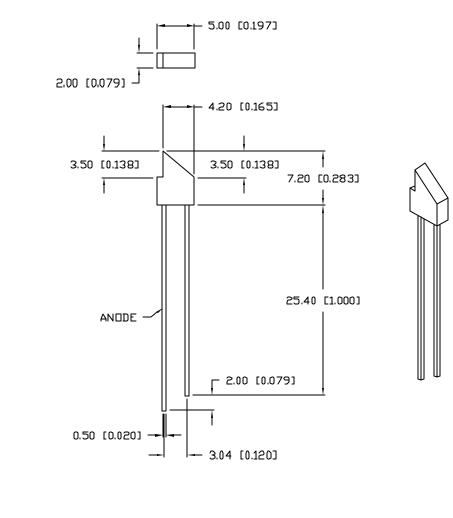

REV.

С

	PART NUMBER	REV.
	SSF-EX2573ID	С
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR.	10.28.99
B	E.C.N. #10BRDR. & REDRAWN IN 3D.	7.18.01
С	E.C.N. #11148.	5.18.07
ELECTRO	-OPTICAL CHARACTERISTICS TA=25°C If=20mA	


PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		635		nm		
Forward Voltage		2.0	2.5	Vf		
REVERSE VOLTAGE	5.0			Vr	lr=100µA	
AXIAL INTENSITY		10		med	l f = 20mA	
VIEWING ANGLE		80		2x theta		
EMITTED COLOR:	RED					
EPOXY LENS FINISH:	red diff	FUSED				

LIMITS OF SAFE OPERATION AT 25°C

JC

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	m₩/°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	' C
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX
* t<10µS		

С

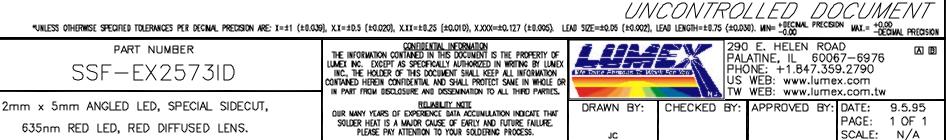

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSF-EX2573ID