

UNCONTROLLED DOCUMENT

Ø5.90 [Ø0.232] — Ø5.00 [Ø0.197]

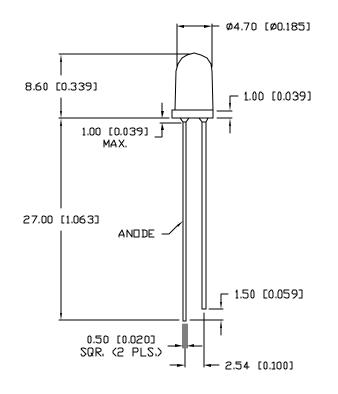



SSL-LX5093XIC

C KEV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10279.	11.25.96
В	E.C.N. #10BRDR. & REDRAWN IN 3D.	5.18.01
С	E.C.N. #11148	10.30.06

Le GO-A

2x theta

ELECTRO-OPTICAL (HAKACIERIZI	ILS IA=Z	Դ և I ₁	f=∠uma		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		635		nm		
FORWARD VOLTAGE		2.0	2,5	V_{f}		
reverse voltage	5.0			٧r	Ir=100μΑ	
AXIAL INTENSITY		60XO		med	$I_f = 20 \text{mA}$	

VIEWING ANGLE 20
EMITTED COLOR: RED
EPOXY LENS FINISH: WATER CLEAR

DIFFERENCE AND ACTUDICATION TO A SEC

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	' C
SOLDERING TEMP.	+ 260	° C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003), MN= +0.000 MAX.= +

PART NUMBER

C SSL-LX5093XIC

T-5mm (T-1 3/4) 635nm RED, TAPERED LED, WATER CLEAR LENS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLISSINGE AND DISSEMINATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WFB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 10.30.06
PAGE: 1 OF 1
JC
SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX5093XIC