

UNCONTROLLED DOCUMENT

Ø5.90 [Ø0.232] — Ø5,00 [Ø0,197]

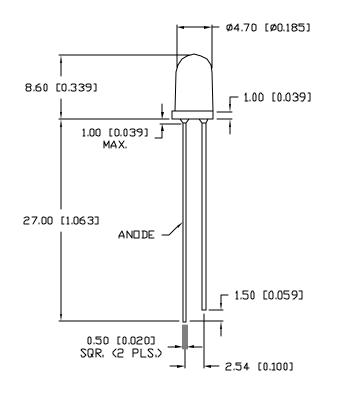



PART NUMBER SSL-LX5093XRC

C C

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	REDRAWN.	10.14.99
В	E.C.N. #10BRDR, & REDRAWN IN 3D.	5.18.01
C	E.C.N. #11148	10.30.06

ELECTRO-OPTICAL	CHARACTER(2)	If=ZVMA				
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		660		nm		
FORWARD VOLTAGE		1.7	2.2	V_{f}		
REVERSE VOLTAGE	4.0			٧r	Ir=100μΑ	
AXIAL INTENSITY		1200		med	$I_f = 20 \text{mA}$	

20

Le GO-A

2x theta

EMITTED COLOR: RED EPOXY LENS FINISH: WATER CLEAR

VIEWING ANGLE

DIFFERENCE AND ACTUDICATION TO A SEC

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY GURRENT	30	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO +85	'Ċ
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION MAX.= +0.00 MAX

REV. PART NUMBER
C SSL-LX5093XRC

T-5mm (T-1 3/4) 660nm SUPER RED LED, WATER CLEAR TAPERED LENS. CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECFROALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSENNATION TO ALL THISD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

U\$ WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 10.30.06
PAGE: 1 OF 1
JC SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX5093XRC