

UNCONTROLLED DOCUMENT



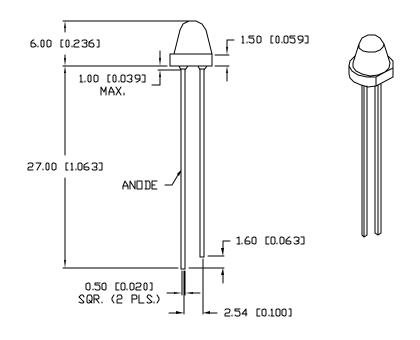

PART NUMBER SSL-LX5063LGT

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	UPDATED SPECS.	7.27.95
В	E.C.N. #10BRDR, & REDRAWN IN 3D.	4.19.01
Ċ	E.C.N. #11148	10.31.06

ELECTRO-OPTICAL CH	ARACTERI	ISTICS TA=25°C		$I_f=20mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		2.2	2,6	V_{f}	
reverse voltage	5.0			٧r	Ir=100μA
AXIAL INTENSITY		40		med	If=20mA
	1.0			med	If=2mA
VIEWING ANGLE		30		2x theta	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN	TRANSPARENT			

LIMITS OF SAFE OPERATION AT 25°C

MAX	UNITS
150	mA
25	m A
105	mW
- 1.2	mW/°C
- 40 TO + 85	' C
+ 260	' C
	3 SEC. MAX
	150 25 105 - 1.2 - 40 TO + 85

* t<10µS

В



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003), MN= +DECINAL PRECISION MAX.= +0.00 MAX.

REV.

PART NUMBER
SSL-LX5063LGT

T-5mm (T-1 3/4) 565nm GREEN LED,
GREEN TRANSPARENT LENS, LOW CURRENT SELECTION.

Confidential information

The information contained in this document is the proferty of Lumox inc. Except as specifically authorized in Nating By Lumox inc., the holder of this document shall keep walt information contained herein confidential and shall protect same in Whole Gr in Part from discussive and dissemination to all third parties.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

CX

Monthsonia - Innecessaria de Monthsonia Comitatoria

DR

DRAWN BY:

JC

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com

CHECKED BY: APPROVED BY: DATE: 10.31.06
PAGE: 1 OF 1

PAGE: 1 OF SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX5063LGT