

UNCONTROLLED DOCUMENT



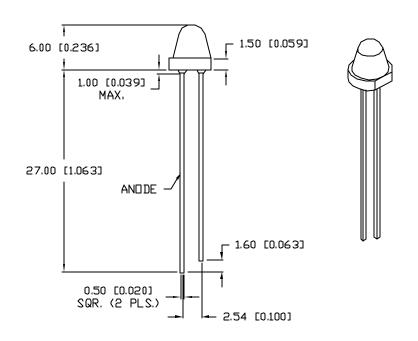

PART NUMBER SSL-LX5063IT

C C

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	UPDATED SPECS,	1.11.95
В	E.C.N. #10BRDR, & REDRAWN IN 3D.	4.19.01
С	E.C.N. #11148	10.31.06

ELECTRO-OPTICAL CH	ARACTER!	STICS TA=25°	С	$I_f = 20mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635		nm	
FORWARD VOLTAGE		2.0	2,5	V_{f}	
reverse voltage	5.0			٧r	Ir=100μΑ
AXIAL INTENSITY		50		med	$I_f = 20 \text{mA}$
VIEWING ANGLE		30		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	RED TR	ANSPARENT			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	<i>3</i> 0	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO +85	'Ċ
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003), MN= +0.000 MAX.= +

PART NUMBER

C SSL-LX5063IT

T-5mm (T-1 3/4) 635nm RED LED, RED TRANSPARENT LENS. Confidential information

The information contained in this document is the proferty of Lumex Inc., except as specifically authorized in Writing By Lumex Inc., the holder of this document shall keep all information contained herein confidential and shall profect same in Whole or in Part From discolsure and dissemnation to all third parties.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067–6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 10.31.06
PAGE: 1 OF 1
JC
SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX5063IT