

UNCONTROLLED DOCUMENT

PART NUMBER	SSL-LX55103ID-FL	REV.	С
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
10.23.00	E.C.N. #10BRDR. & REDRAWN IN 3D.		Α
11.09.06	E.C.N. #11148		В
10.04.11	E.C.N. #10BRDR.		С





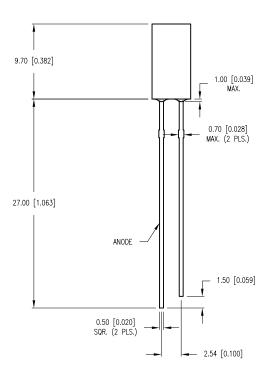

ELECTRO-OPTICAL C	HARACTERIS	TICS TA=25°C		$I_f = 20 \text{mA}$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635		nm	
FORWARD VOLTAGE		2.0	2.5	Vf	
REVERSE VOLTAGE	5.0			٧r	I _r =100µA
AXIAL INTENSITY		15		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		110		2x theta	
EMITTED COLOR:	RED				

LIMITS OF SAFE OPERATION AT 25°C

EPOXY LENS FINISH: RED DIFFUSED

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	*C
SOLDERING TEMP.	+ 260	*C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+}$ $^{-}$ INCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

5mm SQUARE, 635nm RED LED, RED DIFFUSED LENS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

ON	DIVC	DIVITO		ED DOCON	1E/V/
	DATE:	10.04.11		DRAWN BY:	AB
	PAGE:	1 OF 1		CHKD BY:	SS
	SCALE:	NTS		APRVD BY:	KF
	UNIT: mm [INCH]		№		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX55103ID-FL