

UNCONTROLLED DOCUMENT

CAUTION: STATIC SENSITIVE DEVICE FOLLOW PROPER E.S.D. HANDLING PROCEDURES WHEN WORKING WITH THIS PART.



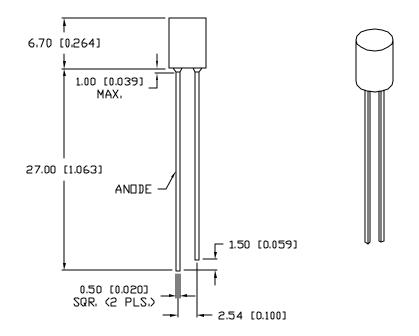

PART NUMBER SSL-LX50FT3USBD

REV.

REV.	E,C,N.	NUMBER	AND	REVISION	COMMENTS	DATE
Α	E.C.N.	#11148				11.01.06

ELECTRO-OPTICAL CH	ARACTERIS	TICS TA=2	5°C	$I_f = 20 \text{mA}$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		470		nm	
FORWARD VOLTAGE		3.5	4.0	V_{f}	
reverse voltage	5.0			٧r	Ir=100µA
AXIAL INTENSITY		25		med	$I_f = 20 \text{mA}$
VIEWING ANGLE		110		2x theta	
EMITTED COLOR:	BLUE				
EPOXY LENS FINISH:	BLUE DIFFUSED				

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	100	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	98	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO +85	' C
SOLDERING TEMP.	+ 260	° C
2,0mm FROM BODY		3 SEC. MAX
* 1.40 C		

* t<10µS



UNCONTROLLED DOCL *UNILESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MN= +DECINAL PRECISION MAX.= +0.00 (±0.002), XXX=±0.127 (±0.005).

REV.

PART NUMBER SSL-LX50FT3USBD

T-5mm 470nm ULTRA SUPER BLUE, FLAT TOP LED, BLUE DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTINUED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.01.06 PAGE: 1 OF 1 SCALE: N/A JC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX50FT3USBD