
UNCONTROLLED DOCUMENT

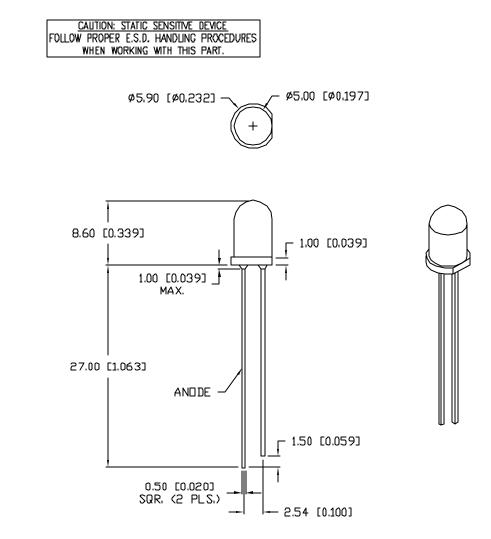

PART NUMBER				
SSL-LX5093SBD/A				
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE		
Α	E.C.N. #10283.	12.11.96		
В	E.C.N. #10BRDR. & REDRAWN IN 3D.	5.31.01		

ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^{\circ}C$ $I_f=20mA$							
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND		
PEAK WAVELENGTH		4.30		nm			
FORWARD VOLTAGE		4.5	5.5	Vf			
REVERSE VOLTAGE	5.0			Vr	lr=100μΑ		
AXIAL INTENSITY		30		med	l _f = 20mA		
VIEWING ANGLE		60		2x theta			
EMITTED COLOR:	BLUE						
EPOXY LENS FINISH:	BLUE DI	FFUSED					

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	100	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	98	тW
DERATE FROM 25°C	- 1.0	mW/"C
OPERATING, STORAGE TEMP.	- 40 TO + 85	' C
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX

	*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.020), LEAD LENGTH=±0.75 (±0.030), UN = +0ECIMAL PRECISION WAX.= +0.00 -0.00							
REV.	PART NUMBER	<u>confidential information</u> The information contained in this document is the property of	1 1114) E. HELEN ROAD ATINE. IL 60067—69	176 B		
В	SSL-LX5093SBD/A	LUMEX NG. EXCEPT AS SPECFICALLY AUTHORIZED IN WRITING BY LUNEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FOUN DESCLIMER AND DSSEMNATION TO ALL THRO PARTIES,	Vie Tourie Abraiouse To Wa	PHC US	VNE: +1.847.359.279 WEB: www.lumex.com WEB: www.lumex.com	0		
	T-5mm (T-1 3/4) 430nm SUPER BLUE LED,	RELIABLITY NOTE OUR NAMY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT	DRAWN BY:		APPROVED BY: DATE			
	BLUE DIFFUSED LENS.	SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. Please pay attention to your soldering process.	BC		PAGE SCAL			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSL-LX5093SBD/A