
UNCONTROLLED DOCUMENT



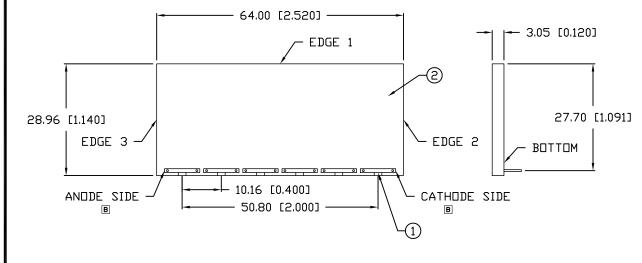

NOTES:

- 1. SSB-LX02SRC, RED LEDS. (6 PCS.)
- 2. SSH-DL6528W, ACRYLIC REFLECTOR.
- 3. PAINT BOTTOM AND EDGES 1, 2, AND 3 HIGH REFLECTIVE WHITE.

PART NUMBER

SSB-DL6528SRW

REV. В

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #11148.	5.14.07
В	E.C.N. #11902.	03.31.14

ELECTRO-OPTICAL CHARACTERISTICS T_A = 25°C

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		660 (RED)		nm	
FORWARD VOLTAGE		3.6	4.6	V_{f}	
REVERSE VOLTAGE	8			V_r	Vr =100µA
LUMINOUS INTENSITY		45		cd/m ²	$I_f = 20 \text{ mA}$
EMITTED COLOR:	RED				
REFLECTOR FINISH:	CLEAR	WHITE			

LIMITS OF SAFE OPERATION AT 25°C PER LED

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	138	W
DERATE FROM 25°C	-1.2	mW/°C
OPERATING TEMP.	-20 TO +70	•C
STORAGE TEMP.	-30 TO +80	•c
SOLDERING TEMP.	+ 240	•c
2.0mm FROM BODY		3 SEC. MAX
t 1 : 40 0		

* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.XX=±0.5 (±0.020), X.XXX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION

REV. PART NUMBER В SSB-DL6528SRW

65mm x 29mm LCD, 6 MODULE BACKLIGHT, 660nm RED LEDS, CLEAR WHITE EPOXY.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY:

APPROVED DATE: 11.10.98 PAGE: 1 OF 1

SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSB-DL6528SRW