
UNCONTROLLED DOCUMENT

PART NUMBER				
SSF-LXH2103SRSRDRP				
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE		
А	E.C.N. #11917.	08.06.14		

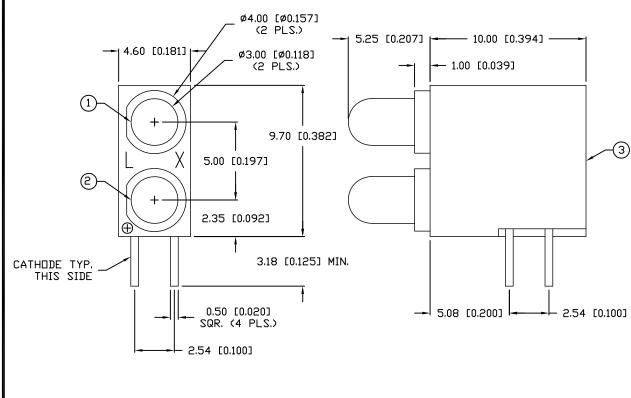

	ELECTRO-OPTICAL CH	TICAL CHARACTERISTICS TA=25°C			lf=20mA		
	PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
)	PEAK WAVELENGTH		660 (RED)		nm		
	FORWARD VOLTAGE		1.7	2.2	Vf		
	REVERSE VOLTAGE	5.0			Vr	l _r =100µA	
	AXIAL INTENSITY		130		mcd	lf=20mA	
	VIEWING ANGLE		60		2x theta		
	EMITTED COLOR:	SUPER RED					
	EPOXY LENS FINISH:	RED DI	FFUSED				

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	- 1.6	mW/*C
OPERATING, STORAGE TEMP.	- 40 TO + 85	•C
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX
* t<10µS		

NOTES:

1. SSL-LX3054SRD, SUPER RED LED. 2. SSL-LX3054SRD, SUPER RED LED. 3. SSH-LXH2103 HOLDER.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ± 0.25 mm (± 0.010 ")

	rev. A	SSE - IXHZIUSSKSKUKP	CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. RELABILITY_NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE TY. FAILURE. PLASE PAY ATTENTION TO YOUR SOLDERING PROCESS.	INCORPORATED		290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 PHONE: 1–847–359–2790 WEB: HTTP://WWW.LUMEX.COM	
26	2 660	T–3mm (T–1) LED, PIGGY–BACK HOLDER, Inm RED LEDS, RED DIFFUSED LENS, REVERSE POLARITY.		DRAWN BY: ss/bc	CHECKED BY:		DATE: 5–21–99 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSF-LXH2103SRSRDRP