


UNCONTROLLED DOCUMENT

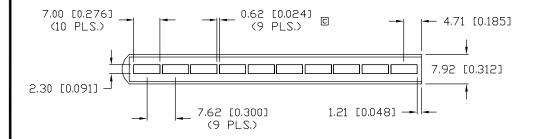

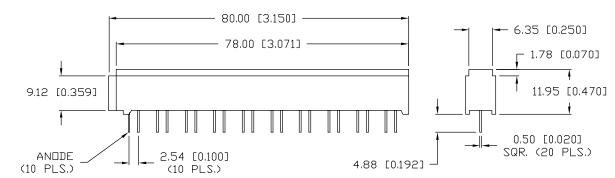

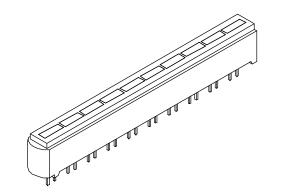

PART NUMBER SSA-LXB1027SRD

| I | REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE |
|---|------|-------------------------------------|----------|
| I | Α | UPDATED SAFE OPER. | 10.11.94 |
| I | В | E.C.N. #10233. | 8.27.96 |
| ı | С | E.C.N. #10702 | 1.10.01 |

| ELECTRO-OPTICAL | CHARACTERIST | ICS TA=25' | 'C | $I_f = 20mA$ | |
|-----------------|--------------|------------|-----|--------------|--------------|
| PARAMETER | MIN | TYP | MAX | UNITS | TEST COND |
| PEAK WAVELENGTH | | 660 | | nm | |
| FORWARD VOLTAGE | | 1.7 | 2.2 | Vf | |
| REVERSE VOLTAGE | 5.0 | | | ٧r | Ir=100μΑ |
| AXIAL INTENSITY | | 50 | | mcd | $I_f = 20mA$ |
| VIEWING ANGLE | | 110 | | 2x theta | |
| EMITTED COLOR: | RED | | | | |

11.95 [0.470] LIMITS OF SAFE OPERATION AT 25°C PER DIE

EPOXY LENS FINISH: RED DIFFUSED

| PARAMETER | MAX | UNITS |
|--------------------------|--------------|------------|
| PEAK FORWARD CURRENT* | 150 | mA |
| STEADY CURRENT | 30 | mA |
| POWER DISSIPATION | 100 | mW |
| DERATE FROM 25°C | -1.2 | mW/°C |
| OPERATING, STORAGE TEMP. | -40 TO +85 | •Ċ |
| SOLDERING TEMP. | + 260 | °C |
| 2.0mm FROM BODY | | 3 SEC. MAX |

^{*} t<10µS

NOTES:

- 1. SSH-LXH1027 HOLDER HOLDER COLOR: BLACK.
- 2. SSL-LX25783SRD LED(10 PCS.)
- 3. UV LOCTITE 352.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+DECIMAL PRECISION MAX.=+0.00 (±0.005). LEAD SIZE=±0.05 (±0.000), LEAD SIZE=

REV.

PART NUMBER SSA-LXB1027SRD

LED ARRAY, 10 UNIT 2.5mm x 7mm RECTANGULAR LEDS.

<u>CONFIDENTIAL INFORMATION</u>
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB; www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY: DATE: 4.16.93 PAGE: 1 OF 1 SCALE: N/A

CT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSA-LXB1027SRD