
## UNCONTROLLED DOCUMENT

| PART   | NUMBER  |
|--------|---------|
| SSL-LX | 3044GYC |

REV. В

| REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE   |
|------|-------------------------------------|--------|
| A    | 11,28,94                            |        |
| В    | E.C.N. #10BRDR, & REDRAWN IN 3D,    | 5.8.01 |

| ø3,20 | [ø0.126] — | _            | ø2.90 | [Ø0.114] |
|-------|------------|--------------|-------|----------|
|       | (-         | $\mathbf{E}$ |       |          |

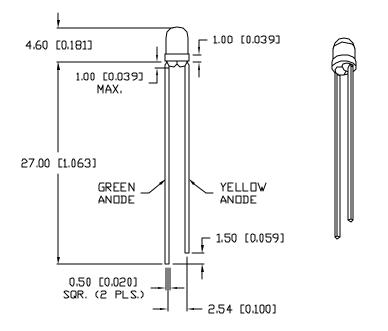

| ELECTRO-OPTICAL CHARA | CTERISTICS | S TA=25°C  | I <sub>f</sub> =20 | )mA            |                       |
|-----------------------|------------|------------|--------------------|----------------|-----------------------|
| PARAMETER             | MIN        | TYP        | MAX                | UNITS          | TEST COND             |
| PEAK WAVELENGTH       |            | 565 (GREEN | l)                 | nm             |                       |
| 585 (YELLOW)          |            |            | nm                 |                |                       |
| FORWARD VOLTAGE (G/Y) |            | 2.2/2.1    | 2.6/2.5            | ۷f             |                       |
| reverse voltage       | 5.0        |            |                    | ٧ <sub>٢</sub> | I <sub>r</sub> =100µA |
| AXIAL INTENSITY       |            | 40         |                    | mcd            | lf=20mA               |
| VIEWING ANGLE         |            | 30         |                    | 2x theta       |                       |
| EMITTED COLOR: GF     | REEN/YELI  | _OW        |                    |                |                       |
| EPOXY LENS FINISH: WA | ATER CLEA  | <b>I</b> R |                    |                |                       |

## ■ LIMITS OF SAFE OPERATION AT 25°C

| PARAMETER               | COLORS         | MAX           | UNITS      |  |  |
|-------------------------|----------------|---------------|------------|--|--|
| PEAK FORWARD CURRENT*   |                | 150           | mA         |  |  |
| STEADY CURRENT          | (G/Y)          | 25/30         | mΑ         |  |  |
| POWER DISSIPATION       |                | 105           | mW         |  |  |
| DERATE FROM 25°C        |                | -1.6          | mW/°C      |  |  |
| OPERATING, STORAGE TEMP | ) <sub>.</sub> | -40  TO  + 65 | 'Č         |  |  |
| SOLDERING TEMP.         |                | + 260         | ,C         |  |  |
| 2.0mm FROM BODY         |                |               | 3 SEC. MAX |  |  |
|                         |                |               |            |  |  |

<sup>\*</sup> t<10µS

UNCONTROLLED DOCUMENT

\*UNILESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.0010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.0030). MN= +DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.127 (±0.005).

REV. PART NUMBER SSL-LX3044GYC T-3mm (T-1) 565nm GREEN/585nm YELLOW BICOLOR LED,

WATER CLEAR LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NG. EXCEPT AS SPECFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 8.20.93 PAGE: 1 OF 1 SCALE: N/A BC

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX3044GYC