
UNCONTROLLED DOCUMENT

PART NUMBER
SSL-LX3353IGW

REV.

REV.	E.C.N.	NUMBER	AND	REVISION	COMMENTS	DATE
Α	E.C.N.	#10BRDR	. &	REDRAWN	IN 3D.	7.10.01

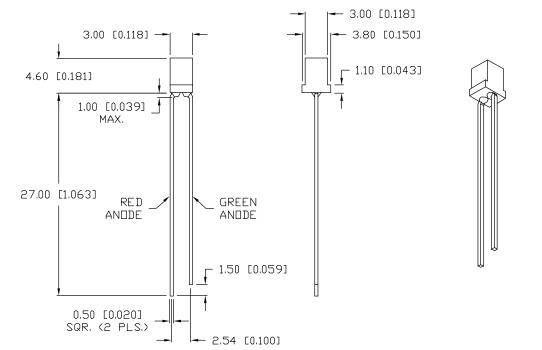

ELECTRO-OPTICAL CHA	RACTERISTICS	CTERISTICS TA=25°C		mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635 (RED)		nm	
	5	65 (GREEN	$ \rangle$	пm	
FORWARD VOLTAGE (R/	(G)	2.0/2.2	2.5/2.6	Vf	
REVERSE VOLTAGE	5.0			V_r	I _r =100µA
AXIAL INTENSITY		10		mcd	lf = 20mA
VIEWING ANGLE		80		2x theta	
EMITTED COLOR:	RED/GREEN				
EPOXY LENS FINISH:	MILKY WHITE	DIFFUSED			

EIMITS OF SALE OF EIVATION AT 25 C						
PARAMETER	COLORS	MAX	UNITS			
PEAK FORWARD CURRENT*		150	mA			
STEADY CURRENT	(R/G)	30/25	mA			
POWER DISSIPATION		105	mW			
DERATE FROM 25°C		-1.2	mW∕*C			
OPERATING, STORAGE TEMP.		-40 TO +85	°C			
SOLDERING TEMP.		+ 260	°C			

* t<10µS

2.0mm FROM BODY

UNCONTROLLED DOCUMENT

REV.

PART NUMBER SSL-LX3353IGW

3mm x 3mm SQUARE BICOLOR LED. 635nm RED/565nm GREEN LED, MILKY WHITE DIFFUSED. CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



LIMITS OF SAFE OPERATION AT 25°C

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY: DATE: 8.12.98 PAGE: 1 OF 1 SCALE: N/A

3 SEC. MAX

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX3353IGW