


PART NUMBER	SSL-LX3T453YD	REV.	С
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
05.03.96	E.C.N. #10159.		Α
07.02.01	E.C.N. #10BRDR. & REDRAWN IN 3D.		В
01.16.13	E.C.N. #10BRDR. & REDRAWN.		С

Α



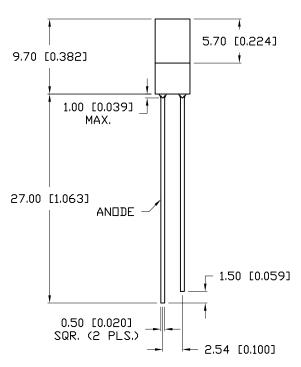



ELECTRO-OPTICAL CHARACTERISTICS TA=25°C	$I_f = 20 \text{mA}$
-----------------------------------------	----------------------

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		585		nm	
FORWARD VOLTAGE		2.1	2.5	$v_f$	
REVERSE VOLTAGE	5.0			$V_r$	Ir=100µA
AXIAL INTENSITY		3		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		100		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	YELLOW	DIFFUSED			

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	<b>-1.2</b>	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	<b>.</b> C
SOLDERING TEMP.	+ 260	<b>.</b> C
2.0mm FROM BODY		3 SEC. MAX

\* t<10µS



425 N. GARY AVE. CAROL STREAM, IL 60188-4900 PHONE: +1.800.278.5666 FAX: +1.630.315.2152 WEB: WWW.LUMEX.COM MEMBER OF ITW PHOTONICS GROUP 4.5mm x 3mm TRIANGULAR LED, 585nm YELLOW LED, YELLOW DIFFUSED LENS.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDEN	TIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT	AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL
KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SA	ME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 01.16.13 DRAWN BY: MA

PAGE: 1 OF 1 CHKD BY: DT

SCALE: NTS APRVD BY: DT

UNIT: mm [INCH]

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX3T453YD