

UNCONTROLLED DOCUMENT

| PART NUMBER |
|----------------|
| SSL-LX5093SUGW |

REV.

| Ī | REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE |
|---|------|-------------------------------------|----------|
| Ī | Α | E.C.N. #11148 | 10.25,06 |



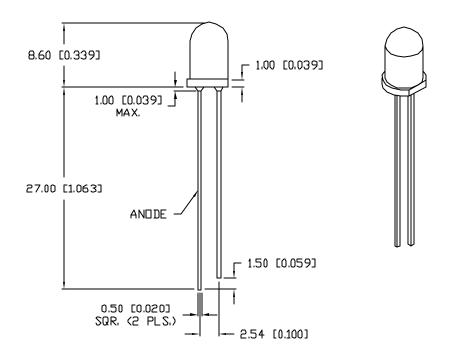

| ELECTRO-OPTICAL CH | ARACTERIST | TICS TA=25°C | : | I _f =20mA | |
|--------------------|---------------------|--------------|-----|----------------------|--------------|
| PARAMETER | MIN | TYP | MAX | UNITS | TEST COND |
| PEAK WAVELENGTH | | 574 | | nm | |
| FORWARD VOLTAGE | | 2.2 | 2,6 | V_{f} | |
| reverse voltage | 5.0 | | | ٧r | Ir=100µA |
| AXIAL INTENSITY | | 170 | | med | $I_f = 20mA$ |
| VIEWING ANGLE | | 60 | | 2x theta | |
| EMITTED COLOR: | GREEN | | | | |
| EPOXY LENS FINISH: | FINISH: MILKY WHITE | | | | |

LIMITS OF SAFE OPERATION AT 25°C

| PARAMETER | MAX | UNITS |
|--------------------------|-------------|------------|
| PEAK FORWARD CURRENT* | 200 | mA |
| STEADY CURRENT | 25 | mA |
| POWER DISSIPATION | 60 | mW |
| DERATE FROM 25°C | - 1.2 | mW∕"C |
| OPERATING, STORAGE TEMP. | - 40 TO +85 | ' C |
| SOLDERING TEMP. | + 260 | ' C |
| 2.0mm FROM BODY | | 3 SEC. MAX |
| | | |

* t<10µS



UNCONTROLLED DOCUMENT

*UNILESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.0010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.0030). MN= +DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.127 (±0.005).

REV.

PART NUMBER SSL-LX5093SUGW

T-5mm (T-1 3/4) 574nm SUPER ULTRA GREEN LED. MILKY WHITE DIFFUSED.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTINUED IN THIS DOCUMENT IS THE PROPERTY OF
LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX
INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 10.25.06 PAGE: 1 OF 1 SCALE: N/A JC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX5093SUGW