
UNCONTROLLED DOCUMENT

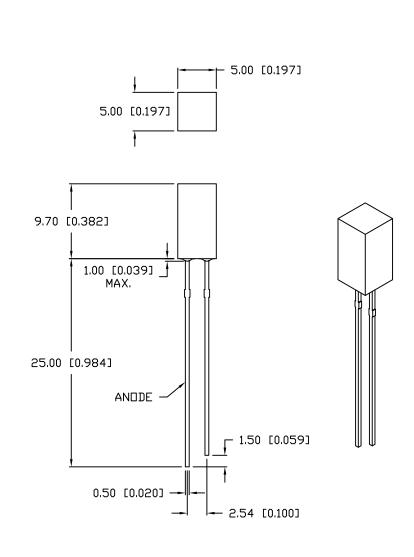

PART NUMBER		
SSL-LX55103SYD-FL		
E.C.N. NUMBER AND REVISION COMMENTS	DA	λTE
E.C.N. #11148	11.0	9.06
E.C.N. #11897	02.1	1.14
	SSL-LX55103SYD-FL E.C.N. NUMBER AND REVISION COMMENTS E.C.N. #11148	SSL-LX55103SYD-FL E.C.N. NUMBER AND REVISION COMMENTS DA E.C.N. #11148 11.0

ELECTRO-OPTICAL CH	ARACTERIS	TICS TA=25	5°C I	f= 20mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		590		nm	
FORWARD VOLTAGE		2.1	2.5	٧f	
REVERSE VOLTAGE	5.0			٧r	lr=100µA
AXIAL INTENSITY		100		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		110		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	YELLOW	DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

150 mA 30 mA 105 mW
105 mW
-1.2 mW/*C
TO +85 °C
260 °C
3 SEC. MA



UNCONTROLLED_DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005)	I. LEAD SIZE= ± 0.05 (± 0.002), LEAD LENGTH= ± 0.75 (± 0.030). MIN= $\frac{+\text{Decimal Precision}}{-0.00}$ Max.= $\frac{+0.00}{-0.00}$
--	---

REV.	PART NUMBER	<u>CONFIDENTIAL INFORMATION</u> THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF			E. HELEN ROA ATINE, IL 6006	AD 67-6976
В	SSL-LX55103SYD-FL	LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.		PHC us	WEB: www.lume	9.2790 x.com
	5mm x 5mm SQUARE LED,	RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT	DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 11.09.06
5	90nm AllnGaP YELLOW LED, YELLOW DIFFUSED LENS.	SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.	JC			PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSL-LX55103SYD-FL