
REV.



ELECTRO-OPTICAL CH	HARACTERISTICS TA =25°C	Vf=2	24V DC		
PARAMETER	MIN	TYP.	MAX	UNITS	TEST COND
INPUT VOLTAGE		24		V DC	
ENERGY USED		3.3		W	
TOTAL LUMENS		220		LUMENS	Vf=24V DC
VIEWING ANGLE		120		2x theta	
COLOR TEMP.	3700		4300	*K	
COLOR RENDERING IN	IDEX (CRI)	65			
OPERATING TEMP.	-20		45	•C	
STORAGE TEMP.	-20		40	*C	
LIFE HOURS			20,000	HRS	
EMITTED COLOR:	NEUTRAL WHITE				
EPOXY LENS FINISH:	WATER CLEAR				

	0			0		
<u> </u>						——¶
_			304.00 [11.968]——			



*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.00}$ MAX.= $^{+0.00}_{-0.00}$ MAX.= $^{+0.00}_{-0.00}$ PRECISION UNCONTROUED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM

LED LIGHT BAR, 12", NEUTRAL WHITE, 24V D.C., 120°, 3.3W.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.


JIN	UNUUNINIUL		_0 000010.	/_/ //
	DATE: 07.13.11		DRAWN BY:	AB
	PAGE: 1 OF 2		CHKD BY:	DT
	SCALE: NTS		APRVD BY:	SS
	UNIT: mm [INCH]	T	(Pb)	

UNCONTROLLED DOCUMENT

PART NUMBER

SSP-LB12NW024K03

REV.

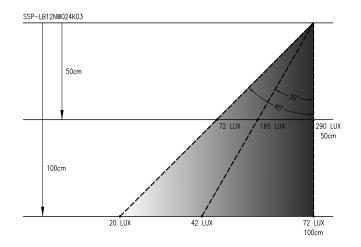

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005). UNCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

LED LIGHT BAR, 12", NEUTRAL WHITE, 24V D.C., 120°, 3.3W.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT. KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL

DATE: 07.13.11 DRAWN BY: AΒ 1 OF 2 PAGE: CHKD BY: DT SCALE: NTS APRVD BY: SS (Pb) UNIT: mm [INCH]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSP-LB12NW024K03