

ICD-S401M14TF-3

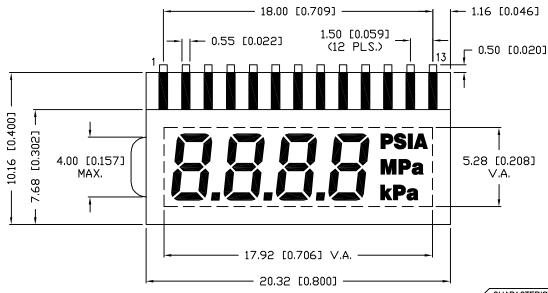



2.31 [0.091] - [0.020] 0.50	 	PAI	NEL DETAIL	.50 [0.138 A	ני	┌ 1.00	[0.039]
4.42 [0.174]				F G B	PSIA MPa kPa	<u> </u>	
	DP1 DIG.1	DP2	DIG.3	DIG.4	1.17	[0.046]	

CHARACTERISTICS						
FLUID TYPE	TN					
BACKGROUND COLOR	GRAY					
VIEWING DIRECTION	6:00					
DISPLAY MODE	TRANSFLECTIVE					
OPERATING VOLTAGE	3.0V A.C.					
OPERATING TEMP.	0°C TO 50°C					
STORAGE TEMP.	-20°C TO 70°C					
DRIVING METHOD	1/4 DUTY, 1/3 BIAS					
CONNECTION TYPE	13 PINS					

PIN	1	2	3	4	5	6	7
COMO	СОМО	/	/	/	1D	DP1	2D
COM1	/	COM1	/	/	1E	1C	2E
COM2			COM2	/	1G	1B	2G
сомз	/	/	/	СОМЗ	1F	1A	2F
PIN	8	9	10	11	12	13	
СОМО	DP2	3D	DP3	4D	/	PSIA	
COM1	2C	3E	3C	4E	4C	MPa	
COM2	2B	3G	3B	4G	4B	kPa	
сомз	2A	3F	3A	4F	4A	/	

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.XX=±0.5 (±0.020), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX. = +0.00 -DECIMAL PRECISION MAX. = +0.00 -DECIMA

REV. PART NUMBER LCD-S401M14TF-3

FOUR DIGIT 0.17" SEVEN SEGMENT, CUSTOM LCD PANEL, TN, TRANSFLECTIVE, 0°C TO 50°C, 6:00 VIEW.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



JC

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

CHECKED BY: APPROVED BY: DATE: DRAWN BY: 2.26.01 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

LCD-S401M14TF-3